


K3_K3m

PA Power Control selection via VRAMP, TX_HB and TX_LB
 1. IPC: Input Power Control mode - for EDGE mode
 (PA gain is fixed and PA input power varies)
 2. BCM: Bias Control mode - for GSMK mode
 (PA gain varies according to power step and fixed input PA power)

REVISIONS

| | |
|------------------------------------|-------------|
| Service Engineering & Optimization | 2007.05.04 |
| Level 3 Block Diagram | Rev. 1.0 |
| K3_K3m | |
| Service Training and Documentation | Page 1 of 2 |

Service Engineering & Optimization
Level 3 Authorized

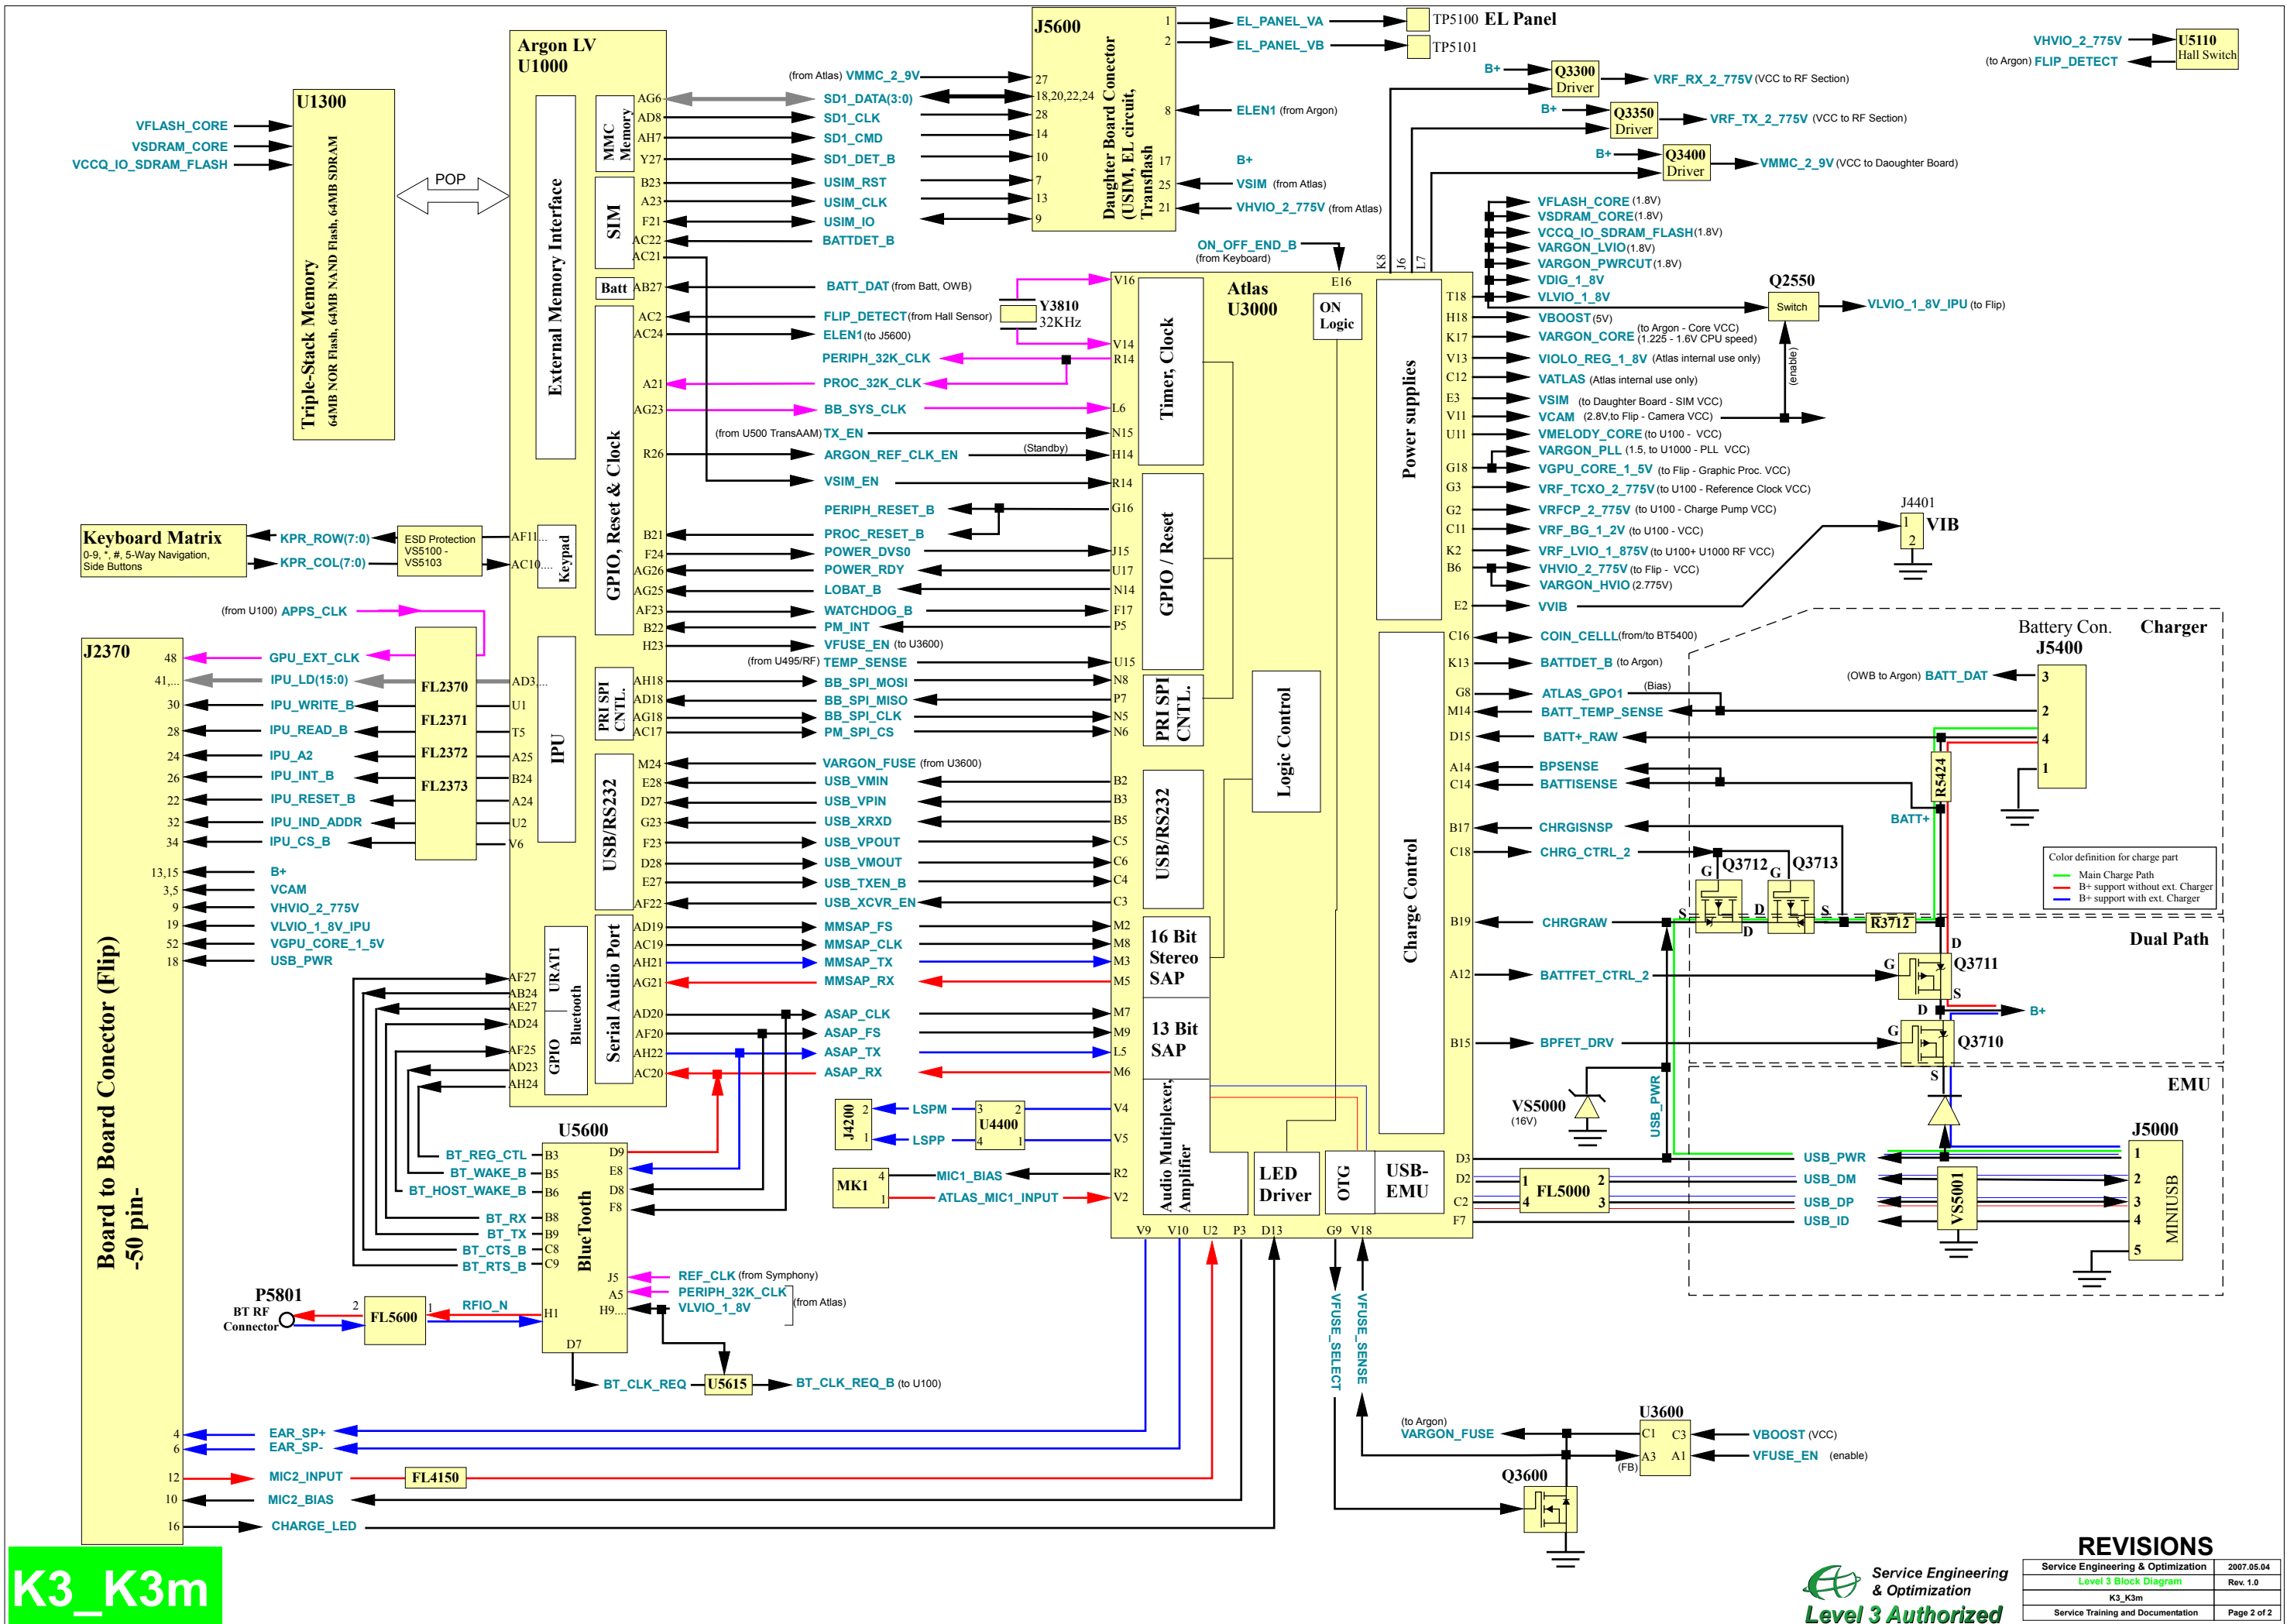

K3_K3m

Service Engineering & Optimization
Level 3 Authorized

| REVISIONS | | |
|------------------------------------|------------|-------------|
| Service Engineering & Optimization | 2007.05.04 | |
| Level 3 Block Diagram | Rev. 1.0 | |
| K3_K3m | | |
| Service Training and Documentation | | Page 2 of 2 |