

Manual for FOMA® M702iG '06.11

Easy Search/Contents/ Precautions Before Using the Handset Making/Answering Calls Making/Answering Video Calls Phonebook Tone/Screen/ Light Settings Security Settings Camera i-mode/i-motion Mail i-appli i-Channel Data Display, Edit, Management/ Music Playback Other Convenient Functions Network Services Data Communication Character Entry **Overseas Use** Appendix/ Using External Devices/ Troubleshooting Index/Quick Manual



To FOMA M702iG Customers

Thank you for selecting the "FOMA M702iG". Before using your "FOMA M702iG", read the followings notes.

Files to download

- The files to download may be the same file names although the data are different.
 When saving files, do not overwrite the files but change the original file names to different ones.
- The maximum savable number of files is 1000. You can download but cannot save the files exceeding this number, so delete unnecessary files before saving.



Errata Sheet

We found the inaccuracies on FOMA M702iG Manual as follows. We deeply apologize for those inaccuracies, and please read the corresponding locations as follows.

Location	Error	Correction	
P31 Part Names and Functions	(missing descriptions)	 If you press this key for 1+ seconds during a call, the call will be terminated. 	
P52 Making a Call (Step 3)	(missing descriptions)	Also, if you press (Smart key) for <u>1+ seconds, the call will be</u> <u>terminated.</u>	
P64 Receiving a Call (Step 3)	(missing descriptions)	Also, if you press (Smart key) for <u>1+ seconds, the call will be</u> <u>terminated.</u>	
P70 Placing a Call on Hold (Step 2)	(missing descriptions)	Also, if you press (Smart key) for <u>1+ seconds, the call will be</u> <u>terminated.</u>	
P75 Setting the Record Message (Note)	Response Time • If this is set to the same duration as "Auto Answer", "Auto Answer" takes precedence.	Response Time If this is set to the same duration as "Auto Answer", "Auto Answer" takes precedence. However, if the set ringtone/vibration. sounds twice repeatedly before the set time, Auto Answer is activated.	
P143, P144 Number of Savable Still Images Out Camera In Camera	*1: <u>Up to 1000 items</u> can be displayed on this FOMA handset.	*1: <u>Up to 1500 items</u> can be displayed on this FOMA handset.	
P175 Changing the Certificate Center Host (Host name)	Enter the host name within <u>50</u> full- pitch or 99 half-pitch characters.	Enter the host name within <u>49</u> full- pitch or 99 half-pitch characters.	
P226 Databox (Note)	 <u>Up to 1000 files</u> excluding the pre- registered files can be displayed on the Databox. 	 <u>Up to 1500 files</u> excluding the pre- registered files can be displayed on the Databox. 	
P244 Editing a Playlist	(missing descriptions)	Sorting Melodies on Playlist List 1 Playlist list screen (P244) ♦ (A) [Function] ◆ "Manage" ▶ "Reorder" 2 Select a melody to sort ◆ (A) [Grab] ◆ Select a destination ◆ (A) [Insert] ◆ (Free Complete)	

Location	Error	Correction
P245 Function Menu on the Playlist Screen	 For description and operation method of the items displayed in the. Function menu, see "Function menu on the Melody file list" (P242). 	"Create New" "Playlist": See "Adding Melodies to a Playlist" (P244), For other than those above, see "Function Menu on the Melody File List Screen" (P242),
P245 Function Menu on the Playlist List Screen	- For the descriptions and operation methods of the items displayed in the Function menu, see "Function Menu on the Melody File List Screen" (P242).	"Manage" ◆ "Reorder": See "Sorting Melodies on Playlist List" (P244). "Manage" ◆ "Remove": See "Deleting melodies from a playlist". "Select Multiple tor ◆ "Add More Melodies": See "Adding Melodies to a. Playlist" (P244). For other than those above, see "Function Menu on the Melody File List Screen" (P242).
P248 Adding a Voice Note to a Category	① Playlist	① Category
P271 Making a Call Using Switch (Step 2)	(missing descriptions)	Also, if you press () (Smart key) for <u>1+ seconds, the call will be</u> <u>terminated.</u>
P271 Receiving a Call Using Switch (Step 2)	(missing descriptions)	When receiving a voice call, you also press (Korart key) for 1+ seconds, the call will be terminated.
P272 Receiving Another Incoming Call during a Call (Step 2)	(missing descriptions)	When receiving a voice call, you also press [] (Smart key) for 1+ seconds, the call will be terminated.
P272 Answering a Call Automatically with Stereo Headset (Note)	 If the Auto Answer ringing time is set to the same or shorter duration as in the Voicemail or Call Forwarding service, or in Record Message, this option takes precedence. 	This function takes precedence. when it is set as the same or shorter length as the Ringing Time or Response Time of Voicemail. service. Call Forwarding service or Record Message. However, when this function is set as the same length as the Response Time of Record Message. if the set ringtone or vibratorsounds twice repeatedly before the Response Time, this function operates.

Location	cation Error Correction		ection	
P282 Answering Incoming Call Putting Current Call on Hold (Step 1)	(missing descriptions)		Also, if you press <u>1+ seconds, the operators</u> terminated.	(Smart key) for call will be
P282 Making a Call Putting Current Call on Hold (Step 1)	(missing descriptions)		Also, if you press <u>1+ seconds, the estimated.</u>	(Smart key) for call will be
P312 Receiving Calls Overseas (Step 3)	(missing descriptions)			a voice call, you also key) for 1+ seconds, rminated.
P321 Menu List	Sound Style 1 Detail	Reminders: Beep	Sound Style 1 Detail	Reminders: Off
P323 Menu List	Call Cost Setup	Credit Limit: Off	Call Cost Setup	Credit Limit: Off
P358 Updating Software (within the frame)	Software update is disabled in the following cases: Lock Application (Delete)		is disabled in the	
P358 Updating Software (within the frame)	(missing descriptions)		with the UIM PIN UIM PIN entry s automatic restar	ting after rewriting s the correct UIM communication ng making and
Quick Manual P25 Answering Incoming Call Putting Current Call on Hold Disconnecting the current call	(** 0		Press (or • (S seconds.	Smart key) for 1+
Quick Manual P25 Answering Incoming Call Putting Current Call on Hold Disconnecting a call put on hold	🕩 [Swap] 🕨 😨		[Swap] ♦ Pre (Smart key) for 1+	

Location	Error	Correction
Quick Manual "Overseas Use" P5 Making a Call to Japan or Countries Other than the Country of Usage (Step 3)	(missing descriptions)	When making a voice call, you also press ↓ (Smart key) for 1+ seconds, the call will be terminated.
Quick Manual "Overseas Use" P6 Making a Call within the Country of Stay (Step 3)	(missing descriptions)	When making a voice call, you also press • Comment () (Smart key) for 1+ seconds, the call will be terminated.
Quick Manual "Overseas Use" P7 Receiving Calls (Step 3)	(missing descriptions)	When receiving a voice call, you also press Gmart key) for 1+ seconds, the call will be terminated.
Manual for Data Communication P2 Before Using	 "musea" and "sigmarion II" need to be updated to perform data communication connecting through DoCoMo's "musea" or "sigmarion II". For details on updating, visit DoCoMo's web site. 	(Delete) * Data communication cannot be performed by connecting DoCoMo's PDA "musea" or "sigmarion II "

DoCoMo W-CDMA and GSM/GPRS Systems

Thank You for Selecting the "FOMA M702iG".

Before using your "FOMA M702iG", thoroughly read this manual and other manuals provided with your package, such as the battery pack, in order to use the "FOMA M702iG" correctly. If you have any questions after reading the manual, contact the "DoCoMo Information Center" listed up on the back of this manual.

The "FOMA M702iG" is designed to be a convenient tool.

Treat it carefully at all times to ensure that it will keep serving you well.

Before Using Your FOMA Handset

- Because the FOMA handset uses radio waves, it may not function in locations where radio
 waves cannot reach, such as tunnels, underground passages and some buildings, in other
 areas where radio waves are weak; or when out of the service area. Even when you are high
 up in a tall building or condominium and nothing blocks your view outside, your FOMA handset
 may not be able to receive or transmit signals. Also, even when radio waves are strong, and
 you are not moving, communication may still be occasionally interrupted.
- Be considerate of other people around you when in public or where it is especially crowded or quiet.
- Because your FOMA handset uses radio waves to communicate, there is a possibility that third
 parties may attempt to listen in on your calls. The W-CDMA and GSM/GPRS systems
 automatically encode signals for all calls so even if someone should somehow be able to listen
 in on the radio signals, an eavesdropper will hear only noise.
- Your FOMA handset sends and receives voice communication as encoded digital data. When you are operating your FOMA handset while moving from location to location sometimes you may encounter weaker radio waves and the transmitted digital data may not be correctly decoded resulting in sound distortions.
- Always keep a backup copy of any data saved on your FOMA handset. DoCoMo assumes no responsibility for the loss of any of your data.
- When you use SSL for a secure connection to conduct business, you agree that you are responsible for any actions you take. DoCoMo and the certifier listed below do not guarantee the safety of SSL for any activities of customers while using SSL, and are not liable for any damages incurred through using SSL.

The authentication companies are: VeriSign Japan K.K., Betrusted Japan Co.,Ltd., GeoTrust Japan, inc., RSA Security Japan Ltd., Secom Trust

- Systems Co., Ltd.
- This FOMA handset supports FOMA Plus-Area functions.
- The FOMA handset can be used only via the FOMA network provided by DoCoMo and DoCoMo's roaming area.

If You are Using a FOMA Handset for the First Time

If this is the first time for you to use the FOMA handset, read this manual in the order suggested below. This will help you become acquainted with the basic preparations and operating procedures for your FOMA handset.

- 1. Insert and charge the battery packP41, P44
- 2. Turn on the power, switch the display language to English, set the time and date and viewing your own number P47, P48, P48, P50
- 4. Become familiar with the meanings of the icons that appear on the screen P32
- 6. Make sure you know how to make/receive callsP52, P63

You can download the latest version of this manual from DoCoMo's web site.

URL for the Operation Manual in PDF Format

http://www.nttdocomo.co.jp/english/support/manual/index.html

URL and the instructions contained of this manual may be changed without notice.

How to Read/Refer to This Manual

There are multiple ways to find the information you need from this manual. Illustrations and symbols are used in the explanations to help you understand how to use the FOMA handset correctly.

How to Refer to This Manual


You can find the information you need in the following ways.


From the Index	▶ P372
When you know the name of a p	articular function or service, look for it in the index.
From Easy Search	P4
Use a simple word to search for	frequently used function or convenient functions.
From the Tabs on the Cover	Course
	Cover the tabs listed on the cover. Jump to the section of interest.
Major content areas are listed or	The tabs listed on the cover. Jump to the section of interest.
	See the next page for details.
From the Contents	▶ P6
Search the Contents for the cate	gory of function that you need.
From the Main Features	P 8
	FOMA M702iG such as new or convenient functions.
Search the main leatures of the	OWA WITCHE SUCH as new of convenient functions.
From the Menu List	▶ P318
Search from this convenient list of	of all available functions.
From the Quick Manual	▶ P378
0,000	ar, brief descriptions about basic functions. It is compact and you can take it
with you when you go out.	
Default	
The default settings are describe	d below the title for each function (P3) and on the menu list (P318).

- Note that "FOMA M702iG" is referred to as "FOMA handset" in this manual.
- The functions which use a microSD memory card are described in this manual: however, you must obtain a microSD memory card separately to use these functions. microSD memory card →P249
- · Reproduction of all or part of this manual without permission is prohibited.
- The content of this manual may be changed without prior notice.

The following examples show how to find information on "Record Message".

From the Index > P372 Search for a function or service name on the FOMA M702iG Display as following.

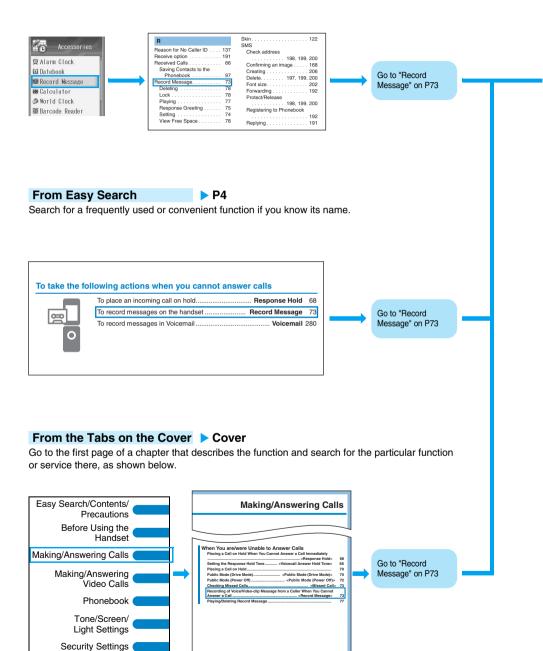

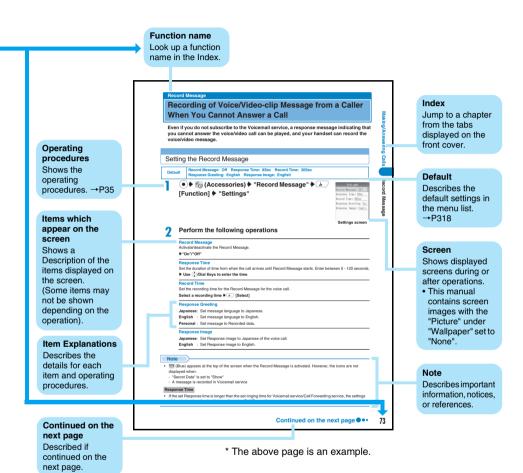

- Screens and illustrations described in this manual are for reference. The screens displayed on the handset itself may appear somewhat differently.
- This manual provides explanations mainly using default settings. The screens or handset behavior may differ from the explanations of the manual if you change the default settings.

Easy Search

To learn about the operation of a function, refer to the following:

To learn about convenient functions for calls



To determine whether or not to notify a called party of your phone number	49
To use the FOMA handset as a speakerPhone	62
To change a volume level of the other party's voice	
Earpiece Volume	67
To place a call on hold	70

To take the following actions when you cannot answer calls



To place an incoming call on hold Response Hold	68
To record messages on the handset Record Message	73
To record messages in Voicemail Voicemail	280

To change a ringtone melody or lighting patterns



To adjust ringtone volume	. Ring Volume 67,	113
To change ringtones		.113
To set Vibrate to notify of incoming call	Vibrate	115
To activate Manner Mode	Manner Mode	117
To change the colors/lighting patterns of Ring Light	hts	
	Ring Lights	123

To view or change display screen



To learn the meaning of icons on the screen	
To set the clock	Time and Date 48
To change the Wallpaper screen	Wallpaper 120
To change the Main Menu appearance	Main Menu 121
To display a Screen Saver	Screen Saver 123
To enlarge the font size	

To make full use of mail



To send Deco-mail Deco-mail	186
To send images File attachment	189
To sort and save mail automatically Auto sort	202

To make full use of the camera



To turn on the light	146, 147
To change the size of capturing	150
To change the shutter tone	151
To directly save to the microSD memory card	151
To display captured images	227

To use the FOMA handset securely



To lock the Sidekeys Sidekey Lock	136
To keep Phonebook entries from prying eyes Secret Data	136
To reject calls arriving without caller ID Call Rejection	137
To reject calls from phone numbers not in the Phonebook Not in Phonebook	138
	100

Other things you can do



To scan QR codes or Bar codes Barcode Reader	151
To use the microSD memory card	249
To exchange information using infrared communication	
Infrared communication	252
To use the FOMA handset as an alarm clock Alarm $\ensuremath{\text{Clock}}$	259
To use the FOMA handset as a calculator $\ensuremath{\textbf{Calculator}}$	269
To update the software Software Update	357
To check for harmful programs Scanning Function	361

• Operating procedures for frequently used functions are summarized in the Quick Manual. →P378

Contents

How to Read/Refer to This Manual 1
Easy Search 4
Contents
Main Features of the FOMA M702iG
Making Full Use of the FOMA M702iG!
Safety Precautions (ALWAYS FOLLOW THESE PRECAUTIONS)
Handling and Care
Intellectual Property Issues
Accessories and Main Options

Before Using the Handset

.....51

- Part Names and Functions
- Display Components
- Selecting Menu Items
- Using the UIM (FOMA Card)
- Inserting/Removing the Battery Pack
- Charging the Mobile Handset
- Battery Meter
 Power On/Off
- Language
 Caller ID Notification
- Time and Date Viewing Number

Making/Answering Calls

- Making a Call
 Dialed Calls
- WORLD CALL In-Car Handsfree
- Receiving a Call
 Received Calls
- Earpiece Volume Ring Volume
- Public Mode (Drive Mode)
- Record Message, and others.

Making/Answering Video Calls79

- Video Calls
- Making a Video Call
- Receiving a Video Call
- Chara-den, and others.

Phonebook91

- Available Phonebooks
- Saving in the Handset Contacts

- Edit Categories
- Search/Filter by/Speed No.
- Deleting Contacts
- Editing Phone Categories
- Checking the Phonebook Capacity and Utilization
- Speed Dial, and others.

Tone/Screen/Light Settings

- 111
- Profile
 Changing Ringer ID and Volume
- Vibrate
 Manner Mode
 Wallpaper
- Main Menu
 Screen Saver
 Ring Lights
- Date and Time
 Display Timeout
- · Backlight, and others.

Security Settings 127

- Passwords
 Changing Passwords
- UIM PIN/UIM PIN2 Phone Lock
- Self Mode
 Lock Application
- Dialing Restriction
 Sidekey Lock
- Secret Data
 Call Rejection
- Ring Delay
- Not in Phonebook, and others.
 - Camera 141
- Before Using the Camera
- Still Image Capture Capture Video
- Changing the Capturing Settings
- Camera Setup
 Barcode Reader

i-mode/i-motion......155

- i-mode i-mode Menu
- Last URL Internet Access
- My Menu
 Change i-mode Password
- Bookmarks
 Screen Memo
- Downloading
- Phone To/Mail To/Web To/i-appli To Function
- i-mode Setting Message R/F
- Using Certificate i-motion, and others.

Mail.....179

- What is i-mode Mail?
 Mail Menu
- Creating/Sending i-mode Mail
- Deco-mail
 Template
- File Attachment Receive Option
- Check New Message
- Outbox/Inbox/Unsentbox
 ChatMail
- Mail Setting
- SMS (Short Message Service), and others.

i-appli 209

- What is i-appli?
 Downloading
- Activating
 Auto-start
 Stand-by
- i-appli Settings Functions of i-appli

i-Channel 221

- What is i-Channel? Using i-Channel
- Setting i-Channel

Data Display, Edit, Management/Music Playback225

- Databox
 Picture Viewer
- Flash Movies Video/i-motion Player
- Chara-den
 Melody Player
- Voice Notes
 microSD Memory Cards
- Infrared Communication, and others.

Other Convenient Functions

......257

- Multiaccess
 Multitask
- Alarm
 Datebook
- My Personal Info
 Call Duration/Cost
- Credit Limit
 Calculator
- World Clock
 Electronic Dictionary
- Bluetooth Link

Master Reset
 Master Clear

- Network Services Available
- Voicemail Service
 Call Waiting Service
- Call Forwarding Service
- Nuisance Call Barring Service
- Caller ID Request Service
- Dual Network Service, and others.

Data Communication..... 289

- Data Communication
 Before Using
- Preparing for Data Communication
- AT Command

Character Entry 295

- Character Entry
 Entering Characters
- Entry Setup
 Edit Common Phrase
- Copying/Cutting/Pasting Characters
- Using Kuten Code
- New Word Dictionary
- Reset Learned Data
- Download Dictionary

Overseas Use...... 305

- Overview of International Roaming (WORLD WING)
- Services Available Overseas
- Checking before Using Overseas
- Making Calls
 Receiving Calls
- Network Setup
 My Network List
- Service Tone Roaming Guidance
- Call Barring Roaming
- Using Network Services

Appendix/Using External Devices/Troubleshooting

- Menu List
 Default Settings
- Troubleshooting
 Error Messages
- Warranty and After-sales Service
- Software Update
 Scanning Function
- Major Specifications, and others.

Index/Quick Manual...... 371

Index
 Quick Manual

Contents

Main Features of the FOMA M702iG

FOMA is the name of the DoCoMo service based on the W-CDMA format, authorized as one of the world's standards for third-generation mobile telecommunication systems (IMT-2000).

Remarkable i-mode! → P156

i-mode is an online service that enables you to get useful information from i-mode web sites (programs) or web sites supporting i-mode using the Display of an i-mode handset. This service also enables you to send and receive mail messages with ease. * This fee-based service requires a separate subscription.

i-motion → P175

You can enjoy videos and music downloaded from i-mode sites or other Internet web sites.

i-shot →P182

You can attach a still image captured with the FOMA handset to i-mode mail for sending.

i-appli/i-appli DX → P210

You can download and use a variety of i-appli software programs from sites and set them for use on the Wallpaper screen. Also, you can link i-appli DX software to the information inside the i-mode handset such as the Phonebook entries and mail messages so that you can enjoy easier function usage with i-appli software.

Deco-mail → P183

You can change the font color, font size or background color of mail and can attach pictures or photos capturing with the built-in camera with the text so that you can compose an enhanced Deco-mail message. Also, as Deco-mail supports templates, you can easily compose a new Deco-mail using the format of a received Deco-mail or a Decomail template downloaded from various sites.

i-mode mail → P180

You can attach an image or melody to i-mode mail. Up to 500 received mail and up to 300 sent mail can be saved on the handset.

i-motion mail → P183

You can attach videos captured by the built-in camera or i-motion movie downloaded from i-mode sites or other Internet web sites to send as i-mode mail.

i-Channel → P222

i-Channel distributes graphical information such as news or weather forecasts. Information is periodically updated and telops flow on the Wallpaper screen to show the latest information. You can press the key corresponding to i-Channel to show the Channel list. By selecting a channel, you can obtain detailed information. If you have not applied to i-Channel service, you can use the service for free for a specified certain period of time.

* This fee-based service requires a separate subscription.

Chara-den → P239

You can display a pre-installed or downloaded "Chara-den" character to use instead of your own image during a video call. Use a key to change the emotions or actions of the character.

Network Services → P183, P280

Voicemail Service (Charged)

* This service requires a separate subscription.

Call Forwarding Service (Free)

* This service requires a separate subscription.

Multi Number (Charged)

* This service requires a separate subscription.

Call Waiting Service (Charged)

* This service requires a separate subscription.

Dual Network Service (Charged)

* This service requires a separate subscription.

SMS (Short Message Service) (Free)

* This service requires no separate subscription.

Video Call → P80

You can see the person you are talking with, even though you are not together. You can hear the other party's voice from the Speaker and switch to the Out Camera so that the other party in talk can view your surrounding landscape.

Camera Function → P142

You can capture still images or videos using the In and Out Cameras. A maximum image size of 1200 x 1600 dots can be captured with the Out Camera with approximately 2 million effective pixels (1.9 million recordable pixels).

Multiaccess/Multitask → P258

Using Multiaccess, you can use i-mode or send/receive mail during a voice call. Also, using Multitask, you can access multiple functions concurrently.

International Roaming → P306

This handset employs the dual system (W-CDMA, GSM (900, 1800, 900MHz)/GPRS). You can make and receive calls or perform communications overseas where 3G networks or GSM/GPRS networks are available using this handset.

- You can use the same phone number overseas as in Japan for international roaming.
- You can easily use communication services regardless of country or region because an available network or carrier can be found automatically.
- You can make an international call easily by adding an international access number or a country code (Dial Assist).
- You can display the time in 3 cities using the World Clock. This function is convenient when you travel overseas because you can view the time at your current location, your next destination, and in Japan, etc. all at once.
- You can look up words using an electronic dictionary on the FOMA handset.
 English-Japanese, Japanese-English and Japanese dictionaries are available.

Infrared Communication/ Infrared Remote Control → P252

Using infrared communication, data can be exchanged between devices equipped with infrared ports. Also, the handset can be used as a remote control for a television with an infrared sensor.

Bluetooth → P272

The handset can be connected wirelessly to a Bluetooth device to perform data communication or handsfree calls. Data, such as Contacts, can be exchanged between Bluetooth devices.

Electronic Dictionaries → P270

3 dictionaries are provided for looking up the Japanese definition of a Japanese word (Japanese - Japanese), the English translation of a Japanese word (Japanese -English), and the Japanese translation of an English word (English - Japanese).

Illumination Indicator → P30, P123

The Illumination Indicator blinks in a vivid color when a call or Email arrives (Ring Lights). You can also set to blink the Illumination Indicator at an alarm time or at the time set for a Schedule event/task (Event Lights).

Barcode Reader → P151

You can scan barcode or QR code information (such as a phone number, Email address, an image or a melody) using the Camera, and save the information to the Phonebook or create i-mode mail.


MicroSD Memory Card → P249

Using a super small removable microSD memory card, you can save images captured with the FOMA handset, or copy data saved on the microSD memory card from a PC to the FOMA handset.

Making Full Use of the FOMA M702iG!

i-Channel → P222

You can set the phone to periodically receive various kinds of information automatically. Also, you can press the Soft Key corresponding to i-Channel to show the Channel list and easily access more useful, detailed information.

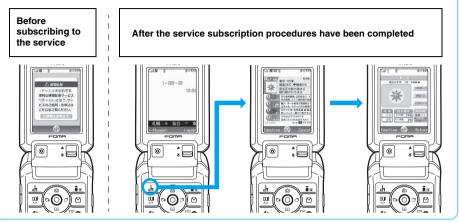

Video Calls → P80

You can talk with someone while watching each other. Also, you can send an animated character (avatar) instead of your own image using Chara-den, and control the character's facial expressions or actions to enhance the conversation.



Video call screen (Example: the other party's screen when Chara-den is used) ©BVIG

International Roaming → P306

Take your FOMA handset along when you travel overseas for business or pleasure. International Roaming allows you to use the same phone number as in Japan to make or receive voice or video calls while overseas. You can also send and receive i-mode mails or SMS (Short Message Service) messages, connect to i-mode, or use network services as in Japan.



Making Full Use of the FOMA M702iG

Convenient functions to assist with global communications

World Clock \rightarrow P269

You can view the date and time in three cities at once. Set three cities to Japan, your current location and your next destination so that you can easily check the time difference when you confirm your schedule or contact a person in a location other than your current location. When Auto Update is set to ON, you can automatically adjust the date and time to your overseas location.

Electronic Dictionary → P270

You can use the English-Japanese and Japanese-English electronic dictionaries. This is convenient to look up Japanese words you do not know.

Calculator → P269

You can convert currencies. Set the currency and its exchange rate of your overseas location to easily check the price in Japanese yen before purchasing an item.

English Functions → P300

The conversion prediction function can be used in English as well as Japanese. English words are predicted as alphabetic characters are entered. Words are also predicted based on words already entered. You can select from conversion options to easily enter English sentences. Also, you can automatically capitalize the leading alphabetic character or insert a space after confirming entered characters.

Bluetooth Communication \rightarrow P272

If you connect a Bluetooth headset or handsfree device, you can talk on the phone or listen to music without holding the FOMA handset in your hand. Also, you can perform data communications by connecting a Bluetooth capable PC and the handset wirelessly.

Illumination Indicator → P123

The Illumination Indicator blinks in a vivid color when a call or Email arrives, or at an alarm time.

Skin →P122

You can personalize the screen design by selecting alternative Skins.

Screen Saver → P123

You can display images or videos in order to prevent the Display being burnt after a certain period of idle time of the FOMA handset.







W	orld Clock
Ó	Tokyo 1 - NOV - 06
\bigcirc	London 1 – NOV – O6
D	New York 31 – OCT – OG



Calculator

1 2 3 4 5 6 7 8 9 C 0 .

Safety Precautions (ALWAYS FOLLOW THESE PRECAUTIONS)


- Before using your FOMA handset, read these safety instructions carefully so that you can use it correctly. After reading the safety instructions, keep this manual in a safe place for later reference.
- These precautions are intended to protect you and others around you. Read and follow them carefully to avoid injury, damage to the product or damage to property.

The signs below indicate the levels of danger or damage that may occur if the particular precautions are not observed.

This sign indicates that incorrect handling has a high possibility of causing death or serious injury.
This sign indicates that incorrect handling poses a risk of causing death or serious injury.
This sign indicates that incorrect handling poses a risk of causing injury or damage to the product or property.

The following signs direct specific actions:

Don't	Denotes things not to do. (Prohibitions)		
Do not disassemble	Denotes not to disassemble.	Avoid water	Denotes not to use where it could get wet.
No wet hands	Denotes not to touch with wet hands.		





.

Do

Denotes to unplug from the outlet.

Safety Precautions" are explained in the following 6 sections:

General Precautions for the FOMA Handset, Battery Packs, Adapters (Chargers) and	nd UIM P13
Precautions for the FOMA Handset	P15
Precautions for Battery Packs	P18
Precautions for Adapters (Chargers)	P19
Precautions for the UIM	P20
Notes on Using near Electronic Medical Equipment	P21

General Precautions for the FOMA Handset, Battery Packs, Adapters (Chargers) and UIM

⚠ DANGER



Use only the battery packs and adapters (chargers) approved by DoCoMo for the FOMA handset.

If you use any type of battery pack, adapter or charger other than the specified one, the FOMA handset, battery pack or other accessories may leak, overheat, burst, catch fire, or give damaged.

Battery Pack M02 FO FOMA Overseas/Domestic AC Adapter 01

FOMA DC Adapter 01

FOMA Dry Cell Battery Adapter 01

* For other products specifically designed for your handset, contact a service counter such as DoCoMo shop.

FOMA AC Adapter 01



Do not disassemble, remodel or solder the handset and UIM.

Do not disassemble Fire, injury, electric shock or malfunction may result. The battery pack may leak, overheat, burst or catch fire.



Do not let FOMA handset and UIM get wet.

Avoid water Contact with water or other liquids may cause heating, electric shock, fire or malfunction. Take care not to use the handset and UIM in areas where they could get wet.



Do not use or leave the FOMA handset and UIM in places with a high temperature such as near a fire or heater, or places exposed to direct sunlight or in cars under the blazing sun.

The devices could be deformed or damaged, or the battery pack may leak, overheat, burst, or catch fire, thus resulting in the deterioration of performance and shortening of the life of devices. Also, part of the housing could get heated, causing bare skin burns.

🕂 WARNING



If you notice any strange smells, overheating, discoloration or warping of the handset, immediately take the following actions:

- 1. Remove the power plug from the outlet or the cigarette lighter socket
- 2. Turn the FOMA handset off

- 3. Remove the battery pack from the FOMA handset
- If you continue to use the handset or its accessories in the above mentioned conditions, it could overheat, rupture, or ignite; the battery pack may leak.

WARNING



Be careful not to let electrically conductive materials (metal pieces, pencil leads etc.) contact with the Charging Terminal and External Connector Terminal. Also, make sure that these are not entered into the inside of the FOMA handset.

•Fire or other malfunctions may result from a short circuit.



Do not throw the FOMA handset or accessories, or subject them to severe shocks.

 The battery pack may leak, overheat, burst, or catch fire.
 Also, malfunction or fire may result.



Keep out of the reach of babies and infants.

Do not use the FOMA handset

stations where there is danger

If used in dusty places or where

explosions or fire may result.

Do not put the battery pack,

FOMA handset or adapter (charger) in heating appliances such as microwave ovens, or

high pressure containers.

may burst.

The FOMA handset or adapter (charger) may overheat, smoke

or catch fire, or its circuit parts

there are flammable gases such as propane or gasoline.

near places such as gas

of fire or explosion.

Accidental swallowing or injury may result.



If children use the FOMA handset or accessories, a guardian should explain the safety instructions and correct operations. The guardian should also make sure that the instructions are followed during use.

Injury may result.



Do not place the FOMA handset or accessories on unstable locations such as wobbly tables or slanted locations.

The FOMA handset or accessories may fall, resulting in injury or malfunction.



CAUTION

The FOMA handset will become moderately warm. In particular, when the battery pack is being charged, or when you are capturing or playing videos, or making video calls, or constantly using i-mode functions, or i-appli functions, the FOMA handset, and its components including the adapter (charger) can become warm.

Some people who continuously or repeatedly touch a hot FOMA handset may develop rashes, itching, or eczema depending on their physical health or existing medical conditions. Pay extra attention when you are using the FOMA handset for an extended period of time while it is connected to the adapter (charger).



Do not store the FOMA handset or accessories in humid or dusty places, or in hot areas.

Malfunction may result.

Precautions for the FOMA Handset

WARNING



Turn off your FOMA handset in places near from highprecision electronic devices or devices using weak electronic signals.

- The FOMA handset may possibly cause the following devices to malfunction:
 - * Electronic devices that may be affected:

Hearing aids, implanted cardiac pacemakers, implanted defibrillators, other medical electronic devices, fire alarms, automatic doors and other automatically controlled devices.

If you are using an implanted cardiac pacemaker, implanted defibrillator or any other electronic medical device, consult the manufacturer or retailer of the device for advice regarding possible effects from radio waves.



If it thunders while using the FOMA handset outside, immediately turn it off and move in a safe place.

Lightning strike and electric shock may result.



Turn off the FOMA handset in places where use is prohibited such as in airplanes or hospitals.

Electronic and electronic medical appliances may be adversely affected. For use inside medical facilities, make sure that you comply with their regulations. You may be punished for using the FOMA handset in airplanes, which is prohibited by law.



People who suffer from heart ailments should be especially careful about setting vibration and ring volume levels.

Being startled by alerts from an incoming call could have effects on the heart.



When listening to music using the headset, do not increase the volume to the maximum.

Doing so may result in hearing impairment.

If you have had episodes of epileptic seizures or unconsciousness because of receiving a stimulus or blink of a strong light, be sure to consult with a doctor before playing games with the FOMA handset. Also, observe the following:

- Take a 15 minute break every hour when using the handset for long periods
- Hold the Display away from your eyes
- · Keep the room well lit.
- Do not use the handset when you are tired
- If you feel any indication of an epileptic seizure or unconsciousness approaching, stop using the handset immediately and see a doctor
- Failing to take appropriate precautions may cause long term impairment.



Stop using the FOMA handset if you feel fatigue in hands, arms, shoulders, or neck while using the handset.

If you continue using the handset, the symptoms may worsen. Check with a doctor if the symptoms persist.



While using Handsfree, do not put the FOMA handset speaker next to your ear.

•You could damage your hearing.



Do not point the photo light directly at someone's eyes at close range.

• Doing so can cause discomfort or even permanent damage to the eyes. Also, injury causing accidents may occur if someone is suddenly startled or blinded by the light.



If you are wearing any imbedded electronic medical devices, do not place the FOMA handset in a pocket close to the location of the device.

•The FOMA handset may cause the device to fail.



Do not directly point the Infrared Port at someone's eyes while exchanging data using infrared communication.

• Even though you may not see the infrared beams, they can have an effect on someone's eyes. Also, the operation of other infrared devices may be interfered with by the infrared port on the FOMA handset. Be careful where you point your infrared beams.



Do not use the FOMA handset while driving a vehicle.

●In accordance with the revision of the Road Traffic Law, you will be penalized for using a mobile phone while driving from November 1st, 2004. Park the car in a safe place before using. Set the FOMA handset to Public Mode or set Voicemail service active.

Safety Precautions

🖄 WARNING



Do not put the FOMA handset in the place where it could be affected by an expanded airbag, e.g. on the dashboard.

If the airbag expands, the FOMA handset could hit you and others, causing accidents such as injury and the FOMA handset could get malfunction or damaged.



Itching, rash or eczema may be caused depending on your physical conditions or predisposition. If an abnormality occurs, stop using the FOMA handset immediately, and then seek medical attention.

Metals are used for the following parts:

Part	Material	Surface Finish
M Logo Mark (Sub-display side)	Nickel	Chrome Plating
M Logo Mark (Display side)	Nickel	Chrome Plating
Dial Keys	Phosphoric Bronze	Nickel base + Tin cobalt plating
microSD Memory Card Slot	Phosphoric Bronze	Nickel Plating Base + Gold Plating
Rear Cover Latch	PC (Polycarbonate)	Tin Plating



Electronic devices in some types of cars can be affected by use of the FOMA handset.

For safety's sake, do not use the FOMA handset in such cars.



Be careful not to catch anything inside the fold of the FOMA handset when you close or open it.

•You may be accidentally injured or device may fail.



Some parts of the FOMA handset are made of glass. If the glass is damaged as by dropping the handset, do not touch the broken glass.

Injury may result.



Use the Bluetooth function only in Japan.

The Bluetooth function of the FOMA handset is certified in compliance with the wireless standard of Japan. You may be punished if you use Bluetooth overseas.



Do not put anything but a UIM in the FOMA Card Slot and microSD Memory Card Slot. Keep water, foreign objects such as electrical conductors, volatile liquids, etc., out of the FOMA handset.

• Putting foreign objects into the FOMA handset could cause fire, electric shock or equipment failure.



Do not place magnetic cards or the like near the FOMA handset.

Information on magnetic cards such as cash cards, credit cards, telephone cards and floppy disks may be deleted.



Do not swing the FOMA handset around.

If you swing the FOMA handset around by its lanyard, someone could get hurt or the device could be damaged.

Precautions for Battery Packs

You can check the type of battery pack in your FOMA handset by reading the label attached to the battery pack.

Description	Туре
Li-ion	Lithium ion battery



If battery fluid somehow gets into your eyes, immediately flush your eyes with clean water and immediately seek emergency medical advice. Do not rub your eyes.

Battery fluid can cause permanent damage to your eyes.



Keep all electrical conductors away from the battery terminal contacts.

 Any metal objects, touching the battery terminals, even metal jewelry, can cause the battery pack to leak, overheat, rupture or ignite.



Do not use excessive force to insert the battery pack into the FOMA handset even when you have difficulty in inserting it. Also, check that the battery pack is oriented correctly when you insert it.

 If you use excessive force, the battery pack may leak, overheat, rupture or ignite.



Do not puncture the battery pack, or strike it with a heavy blow.

If you cut or hammer a battery pack, it may leak, overheat, rupture or ignite.



Do not attempt to incinerate battery packs.

 Battery packs may leak, overheat, rupture or ignite if they are exposed to fire.





If you or your clothing comes in direct contact with battery fluid, immediately put down the handset and completely wash affected areas with water.

 Battery fluid can be very dangerous to skin.



If normal charging time has elapsed but charging does not complete, stop the charging anyhow.

Charging the battery pack for too long can cause it to leak, overheat, rupture or ignite.



If you see that a battery pack is leaking, or if it smells bad, stop using it.

•Be sure to keep a leaky battery pack away from open flames since the battery fluid is highly inflammable and could ignite or explode.

Safety Precautions

Safety Precautions



After its useful life, a battery pack should be properly disposed of. Do not dispose of exhaust batteries with ordinary household waste.

Battery packs which are not disposed of properly may burn, explode or cause environmental damage. Cover the battery terminals with a non-conductive tape and take them to a service counter such as DoCoMo shop or dispose of them in accordance with procedures for disposing of battery packs set up by your local authorities.

Precautions for Adapters (Chargers)



If the Adapter gets wet, unplug it immediately from the outlet or cigarette lighter socket.

A wet adapter can cause electric shock, smoke or fire.



If you are not planning to use the AC adapter for a long period of time, unplug it from the outlet.

 It could catch fire, cause electrical shock or fail to function properly.



When plugging the adapter (charger) into an outlet, plug it in firmly, being careful not to let it contact with metal lanyards or the like.

If you are not careful, you could suffer electric shock, or cause a short-circuit or ignition.



Keep the power plug dust-free. ●Otherwise, ignition may result.



Use the adapter only with the specified power source and voltage.

 Otherwise, fire or malfunction may result. When using the FOMA handset overseas, use the FOMA Overseas/Domestic AC Adapter 01.
 AC adapter: 100 VAC

FOMA Overseas/Domestic AC Adapter 01: 100 to 240 VAC (For use with residential outlet, only)

DC adapter: 12/24 VDC (For negative (-) ground vehicles, only)



Do not use the AC adapter in places with a very high level of humidity such as a bath.

You could suffer an electric shock.



Do not use a damaged adapter (charger) or one with a damaged power cord.

Electric shock, overheating or ignition may result.

If you hear thunder, do not touch the FOMA handset or adapter (charger).

 There is a risk that you may receive an electrical shock or even be struck by lighting.



Do not touch the power cord of the adapter (charger), or the outlet with wet hands.

•You could get an electric shock.



Do not short-circuit the Charging Terminal when the adapter is plugged into the outlet or cigarette lighter socket. Also, never touch the Charging Terminal with fingers or other bare skin.

 Doing so could cause fire, equipment failure, electric shock or other injury.



Use the DC adapter only in a negative (-) ground vehicle. It is not designed for use in a positive (+) ground vehicle.

•Using the DC adapter with reversed polarity could cause a fire.



Place the charger on a stable location during charging. In addition, do not cover or wrap the charger in cloth or bedding.

If cooling air is restricted by wrapping the device, it may overheat, ignite or fail.



Do

If you blow the fuse of the DC adapter, replace it with the specified fuse.

• If the wrong fuse is used, there is a risk of fire or equipment failure. Check the user's manual for the correct fuse.

Always hold the adapter

lighter socket.

(charger) firmly when pulling it

 If you pull on the cord instead of the adapter or plug, the cord could come loose or be damaged

resulting in electric shock or fire.

out of the outlet or cigarette



Before cleaning, pull the plug out of the outlet or cigarette

Otherwise you may suffer an electric shock.



Do not place heavy objects on the adapter (charger) cord and power cord.

Electric shock or fire may result.

Precautions for the UIM

lighter socket.





Be careful when removing the UIM (IC portion).

Your hands or fingers may be injured.

Notes on Using near Electronic Medical Equipment

The description below meets "Guideline on the Use of Radio-communication Equipment such as Cellular Telephones - Safeguards for Electronic Medical Equipment" by the Electromagnetic Compatibility Conference Japan.





Turn off the FOMA handset in crowded trains or other public places where implanted cardiac pacemaker or defibrillator wearers could be nearby.

 Radio waves from the FOMA handset may affect the operation of implanted cardiac pacemakers or defibrillators.



Be sure to adhere to the following regulations inside medical facilities:

- Keep the FOMA handset out of operating rooms (ORs), intensive care units (ICUs) or coronary care units (CCUs).
- Turn off the FOMA handset in hospital wards.
- Turn off the FOMA handset in hospital lobbies and corridors if electrical medical devices could be nearby.
- If the medical facility has specific zones where use or possession of handsets is prohibited, follow those regulations.
- If the function which automatically turns on your FOMA handset is set, cancel the setting before turning it off.



If you use an implanted cardiac pacemaker or implanted defibrillator, use the FOMA handset 22 cm or more away from the implanted cardiac pacemaker or implanted defibrillator.

•Operation of an implanted cardiac pacemaker or implanted defibrillator may be affected by radio waves.



Patients using electronic medical equipment other than implanted cardiac pacemakers or implanted defibrillators (outside medical facilities for treatment at home, etc.) should check the influence of radio waves upon the equipment by consulting the manufacturer.

Operation of electronic medical equipment may be affected by radio waves.

Handling and Care

General Usage Guidelines

Do not let the equipment get wet.

The FOMA handset, battery pack, adapter (charger) and UIM are not waterproof. Do not use them in places with high humidity such as a bath or where rain may get it wet. If you carry them close to your body, moisture from sweat may corrode the internal parts causing a malfunction. Note that malfunctions deemed to be caused by water are not covered by the warranty, and may be impossible to repair. Since these malfunctions are not under warranty, even when repair is possible, it will be done at the user's expense.

Clean the FOMA handset with a dry, soft cloth (Lens cleaning cloth).

- The Display of the FOMA handset sometimes has a special coating so that it is easier to see. If you rub the Display roughly with a dry cloth, it may be scratched. Take care of the way of handling, and use only a dry, soft cloth such as used for cleaning glasses. If the Display is left with water drop or stain adhered, smear may be generated or the coating may peel off.
- Do not use alcohol, thinner, benzene, detergent or other solvents for cleaning, otherwise the printing may be removed or discoloration may result.

Occasionally clean the connector terminal with a dry cotton swab.

If the connector terminal becomes dirty, the connection may become intermittent because power disconnects or the battery is not fully charged. Wipe the connector terminal with a clean dry cloth or cotton swab.

Do not place the equipment near air conditioner outlets.

Condensation may form due to rapid changes in temperature, and this may corrode internal parts and cause malfunction.

Do not place the FOMA handset where excessive force will be applied to it. If the FOMA handset is inserted to a full bag, or placed in a pocket and sat on, its LCD and/or internal PCBs may be damaged or malfunction. Such damage is not covered by warranty.

Do carefully read each manual attached to the battery pack or adapter (charger).

FOMA Handset

Avoid using in extremely high or low temperatures.

The FOMA handset should be used within a temperature range from 5 $^\circ C$ to 35 $^\circ C$ and a humidity range from 45 % to 85 %.

- The FOMA handset may affect general phones, televisions or radios, etc. in use nearby. Use as far as possible from such appliances.
- Keep a separate record of any information stored on the FOMA handset and store the copies in a safe location.

DoCoMo assumes no responsibility for the loss of any of your data.

- Do not sit down when the FOMA handset is in the back pocket of your pants. Also, do not place it at the bottom of a full bag, or where it will encounter excessive force. Malfunction may result.
- Make sure that nothing, such as a lanyard, gets caught between the parts of the FOMA handset when you fold it.

Malfunction or breakage may result.

- It is normal for the FOMA handset to become warm during use or while charging. You can continue to use it even if it is warm.
- **Do not leave the FOMA handset with a camera pointing directly into sunlight.** Pixels may become discolored or burn out.

Handling and Care

Battery Packs

Battery packs do not last forever.

If the battery pack on your FOMA handset shows that it is nearly discharged shortly after you have fully charged it, it is time to replace the battery pack. Purchase the specified battery pack. Use the specified battery pack.

- Charge the battery pack in a place with an ambient temperature of 5°C to 35°C.
- Be sure to charge the battery pack before you first use the FOMA handset or after you have not used it for a long time.
- The actual time that a battery pack holds its charge depends on how the FOMA handset is used and how close the battery pack is to the end of its useful life.

The battery pack may bulge towards the end of its useful life. This is normal.

When you are not using a battery pack, keep it in a cool dry place away from direct sunlight.

If you are not planning to use the FOMA handset for a long time, remove the battery pack from the FOMA handset after its power has been completely drained. Keep the battery pack in its original plastic bag.

Adapters (Chargers)

Charge the battery pack in a place with an ambient temperature of 5°C to 35°C.

Charge the battery pack where:

- There is very little humidity, vibration, and dust.
- There are no general phones, television sets or radios nearby.
- It is normal for the adapters (chargers) to become warm while using or charging the FOMA handset. You can continue to use it even if they become warm.
- Only use the DC adapter when the car engine is running. The car battery could be depleted.
- When using a outlet with a latch mechanism, observe the precautions that came with the outlet.
- Do not subject the adapters to sharp impacts. Also, do not bend the Charging Terminal and terminal guide.

Malfunction may result.

UIM

- Do not use excessive force to insert/remove the UIM.
- Do not use excessive force on UIM when inserting it into the handset.
- It is normal for the UIM to become warm during use. You can continue to use it even if it becomes warm.
- Note that NTT DoCoMo will not be liable for malfunctions occurring as the result of inserting and using a UIM with unrecommended IC card reader/writer.
- Always keep the IC portion of the UIM clean.
- Clean the UIM with a soft, dry cloth (Lens cleaning cloth).
- Keep a separate record of any information stored on the UIM and store the copies in a safe location.

DoCoMo assumes no responsibility for the loss of any of your data.

- To protect the environment, please bring the old UIM to a service counter such as DoCoMo shop.
- Avoid extreme temperatures.

- **Do not scratch, touch carelessly or short circuit the IC portion.** Data loss or malfunction may result.
- Do not drop or give shock to the UIM. Malfunction may result.
- Do not bend the UIM or put heavy things on the UIM. Malfunction may result.

Bluetooth

Bluetooth is a technology that connects Bluetooth-compatible devices such as mobile phones and PCs wirelessly. \rightarrow P272

Passkey

Passkey is a password that prevents unauthorized use of a Bluetooth device. Usually, you can set a passkey by choosing up to 16 half-pitch alphanumeric characters. However, on some devices passkeys are preset and cannot be changed. To enable authorized access, you can enter the same designated passkey in both your FOMA handset and the target Bluetooth device, or you can enter the designated passkey in your FOMA handset alone.

For better security, it is recommended that passkeys be set using as many digits as possible (up to 16 digits), and that you do not create a passkey using your name, birthday, or other information that is easy to guess.

For a better connection, keep the following points in mind:

• The distance between your handset and another Bluetooth device must be within approximately 10 meters, and in a direct line of sight. The maximum distance under which connections are possible may be shorter depending on the environment (i.e. blocked by a wall or furniture) or building structure. This distance also will be shorter if there is an obstruction between the FOMA handset and other Bluetooth device.

In particular, if there is an intervening wall or floor of reinforced concrete between Bluetooth devices, they may be unable to connect with each other. Note that the abovementioned connection distance is not guaranteed.

- During connection, keep Bluetooth devices more than 2 meters away from other electrical devices, such as home electric appliances, audiovisual devices, office automation devices, digital cordless telephones, and facsimile machines. In particular, when using a microwave oven, be sure to keep Bluetooth devices more than 3 meters away from it to prevent interference. Normal connections may fail to be established when other electric devices are powered on. Also, Bluetooth devices may cause noise or reception failure on televisions or radios (television images may be degraded on certain UHF or satellite broadcasting channels).
- If there is a broadcast station or radio set near a Bluetooth device to which you want to connect, your FOMA handset may be unable to connect with the Bluetooth device. In such a situation, move the Bluetooth device to another location from which connection is possible.

Radio interference with Wireless LANs

Bluetooth devices use the same frequency band (2.4 GHz) as do Wireless LANs (IEEE 802.11b/ g). Therefore, if a Bluetooth device is used near a Wireless LAN device, radio interference may cause communication to slow down, generate noise or completely fail. If this occurs, take the following measures:

- Keep your FOMA handset and the Bluetooth device to which you wish to connect wirelessly, 10 meters or more away from the Wireless LAN device.
- When it is impossible to separate the devices by more than 10 meters, power down the Wireless LAN or Bluetooth device.
- With regard to Bluetooth communication security, FOMA handsets support Bluetooth standard security provisions. However, some settings may be inadequate for your security requirements, so be careful when using Bluetooth for communications.
- Please note that NTT DoCoMo is not responsible in case information leaks from Bluetooth communications.

With FOMA handsets, you can use the services compatible with the following version and profiles:

Supported Bluetooth version	Bluetooth standard Ver. 1.2 *1
Output	Bluetooth standard Power Class2
Transmission range *2	Within approx. 10 meters
Supported Bluetooth profiles *3	Object Push Profile Dial-Up Networking Profile Headset Profile Hands-free Profile Basic Printing Profile Basic Imaging Profile File Transfer Profile Advanced Audio Distribution Profile Audio/Video Remote Control Profile

*1: All Bluetooth-compatible devices including FOMA handsets are compliant with the Bluetooth standard defined by the Bluetooth SIG, and have been authorized by the Bluetooth SIG. However, depending on the characteristics or specifications of the device, methods of operation may differ, or data exchange after connection may not be possible.

- *2: Varies depending on obstacles between the communication devices and the radio wave signals.
- *3: These are specifications for use between Bluetooth compatible devices and Bluetooth standards.

Frequency band

The frequency band used by your FOMA handset is indicated on a label under the battery pack of the FOMA handset. The following is an explanation of how to read this label.



(1) 2.4 : Indicates a radio device that uses the 2,400 MHz band.

(2) FH : Indicates device uses the FH-SS modulation.

- : Indicates device is assumed to interfere with other devices within 10 meters.
- (4)

(3) 1

: Indicates device fully uses the bandwidth between 2,400.0 MHz and 2,483.5 MHz, and that it cannot be set to avoid the frequencies used by microwave tracking systems.

Precautions for using Bluetooth devices

The frequency band used by this product is also used by microwave ovens and other industrial, scientific, and medical devices, licensed private radio stations such as those for mobile identification in factory production lines, specified low power radio stations that do not require any licenses, and amateur radio stations. Hereafter, these are called Other Radio Stations.

- 1. Before using this product, make sure that there are no Other Radio Stations operating nearby.
- 2. If radio interference occurs between this product and Other Radio Stations, immediately move this product to another place or stop radio wave emission from this product to avoid radio interference.
- 3. For other points you are concerned about, or if a trouble occurs, contact us at the following phone number:

Inquiries: 0120-005-250 (In English) * Can be called from mobile phones or PHSs.

Camera Handling

If you seriously annoy others when using the FOMA handset, you may be liable for prosecution under applicable laws or regulations (such as the Public Nuisance Laws).

Please be considerate of other people's privacy when capturing and sending pictures using camera-equipped mobile phones.

Additional Precaution

NTT DoCoMo will not be responsible for the unavailability of various functions of the FOMA handset due to combination with devices, networks, software, etc. provided by parties other than NTT DoCoMo.

Intellectual Property Issues

Copyrights and Portrait Rights

You have no right to copy, modify, or distribute the contents such as text, images, music, or software downloaded from web sites on the Internet, or images captured by the cameras of this product without permission from the copyright except for when the copy or quote is for personal use that is allowed by the Copyright Law.

Note that it may be prohibited to capture or record live performances or exhibitions even for personal use. Refrain from taking portraits of other persons and uploading such portraits on websites without consent, as this violates portrait rights.

Easy Search/

Contents/Precautions

Trademarks

- "FOMA", "mova", "i-mode", "i-appli DX", "WORLD CALL", "WORLD WING" "Public Mode", "i-melody", "i-area", "i-motion", "i-motion Mail", "Chaku-motion", "Deco-mail", "Chara-den", "i-shot", "mopera", "mopera U", "Dual Network", "FirstPass", "Visualnet", "V-live", "i-Channel", "Short Mail", "Security Scan", "My DoCoMo", "Multi Number", "DoPa", "sigmarion", "musea", and the logos of "FOMA", "i-mode" and "i-appli" are trademarks or registered trademarks of NTT DoCoMo, Inc.
- The Free Dial Service name and its logo are trademarks of NTT Communications Corporation.
- "Multitask" is a trademark of the NEC Corporation.
- Java and all trademarks/logos related to Java in the U.S. and elsewhere, are the trademarks of U.S. based Sun Microsystems, Inc. or its registered trademark.
- "Catch Phone (Call Waiting Service)" is a registered trademark of the Nippon Telegraph and Telephone Corp.
- MOTOROLA and the Stylized "M Logo" are registered in the US Patent & Trademark Office. (c) Motorola, Inc. 2006.
- The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by NTT DoCoMo, Inc. is under license. Other trademarks and trade names are those of their respective owners.
- McAfee[®] and "マカフィー[®]" are registered trademarks or trademarks of McAfee. Inc. and/or its affiliates in the US and/or other countries.
- Quick Time is a trademark of Apple Computer, Inc. in the US and other countries.
- Powered by JBlendTM Copyright 2002-2006 Aplix Corporation. All rights reserved.
- QR code is a registered trademark of DENSO WAVE Inc.
- Gガイド, G-GUIDE, Gガイドモバイル, G-GUIDE MOBILE, and the G-GUIDE logos are registered trademarks in Japan of Gemstar-TV Guide International, Inc. of America or its affiliates.
- This product is preloaded with NetFront from ACCESS Co., Ltd. as its Internet browser. NetFront is a trademark or registered trade mark in Japan and in other countries of ACCESS Co., Ltd. Copyright[©] 1996-2006 ACCESS CO., LTD NetFront and **NetFront** are registered trademarks of ACCESS Co., Ltd, in Japan and other countries.
- Adobe and Adobe Reader are trademarks or registered trademarks of Adobe Systems Incorporated in the United States and other countries.
- microSD is a trademark.
- Other company names or product names mentioned in this content are the trademarks or registered trademarks of their respective owners.

Others

- This product employs Flash[®] Lite[™] technology from Adobe Systems Incorporated. Flash, Flash Lite, and Macromedia are trademarks or registered trademarks of Adobe Systems Incorporated (アドビシステムズ 社) in the U.S.A. and/or other countries.
- A module developed by Independent JPEG Group is integrated into the software on this product.
- · Microsoft, MS, and Windows are registered trademarks or trademarks of U.S. based Microsoft Corporation in the U.S. and other countries.
- Windows XP is an abbreviation of Microsoft[®] Windows[®] XP Professional operating system, or Microsoft[®] Windows® XP Home Edition operating system.
- Windows 2000 is an abbreviation of Microsoft[®] Windows[®] 2000 Professional operating system.
- The above trademarks may be written side-by-side in the following manner: Windows XP, 2000.







Accessories and Main Options

Accessories and Main Options

Accessories

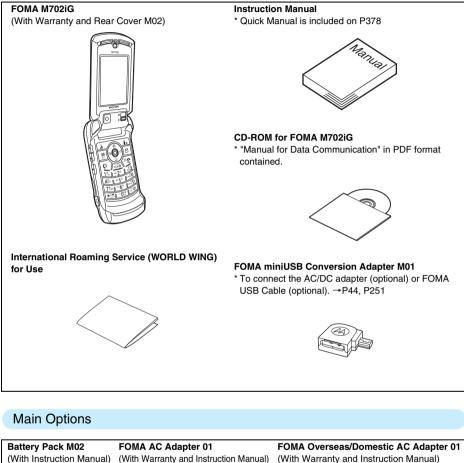

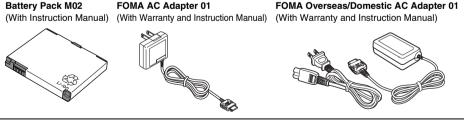


Other Options \rightarrow P340

Before Using the Handset

Part Names and Functions		30
Display Components		32
Selecting Menu Items		35
Using the UIM (FOMA Card)		39
Inserting/Removing the Battery Pack		41
Charging the Mobile Handset		43
Checking the Battery Level	<battery meter=""></battery>	46
Turning the Power On/Off	<power off="" on=""></power>	47
Switching the Display Language to English	< <language></language>	48
Setting Time and Date	<time and="" date=""></time>	48
Sending Caller ID	< Caller ID Notification>	49
Viewing Your Own Number	<viewing number=""></viewing>	50

Part Names and Functions

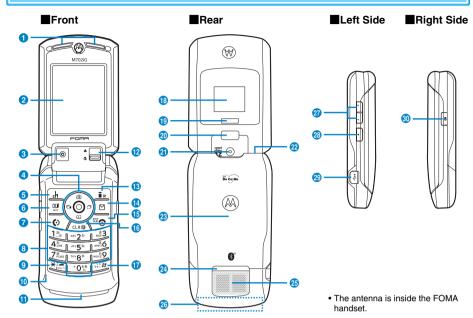

1 Earpiece

• The other party's voice comes from here.

2 Display →P32

In Camera

- Capture your own image with the camera/video camera. →P145, P147
- Capture your own image during video calls. →P86

④ ● Multi-function Key →P31

5 🖅 i-Channel/Left Soft Key

- Press on the Wallpaper screen to open the Channel list screen. →P223
- Perform the function displayed on the Left Soft Key. \rightarrow P34

🜀 戅 Video Phone Key

- Make/receive a video call. →P80, P83
- Press on the Wallpaper screen to open the Dialed Calls list screen. →P54
- Press on the character entry screen to toggle between upper and lower case, and press for 1+ seconds to toggle between full-pitch and half-pitch.
 →P296

Start/Network Search Key

- Make/receive a voice call. →P52, P63
- Receive a video call. →P83
- Press on the Wallpaper screen to the Dialed Calls list screen, and press for 1+ seconds on the Wallpaper screen to open Network screen. →P54, P313
- Press on the character entry screen to enter a line feed mark, and press for 1+ seconds to enter a space. →P296

8 Dial Keys

- Press to enter a phone number or character. →P328
- Press to interview of the Wallpaper screen for 1+ seconds to make a call using speed dialing. →P109
- Press <u>*0%</u> for 1+ seconds on the Wallpaper screen to enter "+". →P59

9 💌 */Public Mode (Drive Mode) Key

- Enter "*"/"*".
- Press for 1+ seconds on the Wallpaper screen to set/ cancel Public Mode (Drive Mode). →P70

10 Mouthpiece/Microphone

- Send your voice to the other party during a call.
- Record sounds while recording a video or voice note. →P147, P245

Call/Charging/Illumination Indicator

- Blink for incoming calls. →P123
- Light in red during charging.
- Blinks when a mail message arrives or at the set time for an alarm, Schedule event or Task. →P124

😢 Macro Mode Switch

Switch the Out Camera to the macro mode. →P149

13 Jian i-mode/Right Soft Key

- Press on the Wallpaper screen to open i-mode menu screen, and press for 1+ seconds on the Wallpaper screen to open i-appli software list screen. →P160, P212
- Perform the function displayed on the Right Soft Key. \rightarrow P34
- Press on the Character entry screen to switch the character entry mode. →P296

Part Names and Functions

ess apt

🔞 🖻 Mail Key

- Press on the Wallpaper screen, etc. to open the Mail Menu screen. →P184
- Press on the Character entry screen to switch to pictographs (E-Moji), emoticons, and symbols. →P297

🚯 💿 Power/End/Response Hold Key

- While "Secret Data" is set to "Show", press on the Wallpaper screen to set Secret Data to "Hide".
 →P136
- Terminate calls.
- Terminate all functions and returns to the Wallpaper screen.
- Turn the power on/off. →P47

16 📖 Clear Key

- Restore the previous state.
- Delete entered phone numbers or characters.
- Press for 1+ seconds on the Wallpaper screen to activate/deactivate Self Mode. →P132
- When an i-appli stand-by screen is activated, press this to control the i-appli when the wallpaper screen is open.
- Press on each notification screen to erase the icon.

💔 🖅 #/Manner Mode Key

- Enters "#".
- Press for 1+ seconds on the Wallpaper screen to set/ cancel Manner Mode. →P117

10 Sub-display →P32

19 Infrared Port →P253

2 Photo Light

Use to capture still images/videos in dark places.
 →P146, P148

Out Camera

- Capture images of surroundings with the camera/ video camera. →P145, P147
- Capture images of surroundings during video calls. →P86

22 Lanyard Hole

23 Rear Cover

 Remove the rear cover when inserting/removing the UIM, battery pack or microSD memory card.
 →P39, P41, P249

29 Rear Cover Latch →P41

23 Speaker

- Ringtones, alarm tones, and melodies sound from here.
- The other party's voice comes from here during a handsfree call. →P62, P83

20 Antenna (built-in)

• Do not cover the antenna with your hand during a call/communication.

😰 🎒 Volume Keys

- Press on the Wallpaper screen, etc. to adjust the ring volume.
- Press while a call is arriving to stop the ringtone/ vibration.
- Press during a call to adjust the Earpiece volume.
- Press while a menu or list is displayed to move the cursor up or down. (The ringtone volume may be

adjusted depending on the function currently displayed)

Smart Key

- When the FOMA handset is open, press on the Wallpaper screen to open the Video capture screen.
- Pressing for 1+ seconds with "Sidekey lock" set to "On" and the FOMA handset being closed, press to unlock the Sidekey Lock. →P136
- Press on the Still image capturing screen to capture/ save a still image. Press on the Video capturing screen capture/pause/save a video.
- Press while a menu or list is displayed to select or perform the highlighted item.


29 External Connector Terminal

- Connect the FOMA miniUSB Conversion Adapter M01 (accessory), AC adapter (optional), DC adapter (optional), or FOMA USB Cable (optional).
- Connect miniUSB Stereo Headset M01 (optional).

🕫 Voice Memo Key

- Record a voice note while pressed on the Wallpaper screen, etc. →P245
- Press for 1+ seconds when the handset is ringing to start Record Message. →P76

Multi-function Key



Operation	Notation	Description
Press the Menu/Select Key	۲	 Press on the Wallpaper screen to open Main Menu. Perform the selected item. Fixes the entered characters. Press on the Still image capturing screen to capture/save a still image. Press on the Video capture/stop/save a video.
Press the Camera/ ↑ Key	8	 Press on the Wallpaper screen to open the Still image capturing screen. Move the cursor up/scrolls the screen up.
Press the Phonebook/ ↓Key	\bigcirc	 Press on the Wallpaper screen to open the Phonebook. Move the cursor down/ scrolls the screen down.

Continued on the next page ••• 3

31

Operation	Notation	Description
Press the Received Calls/ ← (Previous) Key	\odot	 Press on the Wallpaper screen to open the Received Calls list screen. Move the cursor left/ scrolls the screen left.
Press the Dialed Calls/ → (Next) Key	٨	 Press on the Wallpaper screen to open the Dialed Calls list screen. Move the cursor right/ scrolls the screen right.

 Notations such as () O P are used to explain the operation of pressing multiple keys of up, down, left or right.

Display Components

The meanings of the icons appearing at the top of the Display or Sub-display are as follows:

	Dis	splay
	Tat	● ② ③ ⑤ ⑤ ⑦ ③ ③ ◎ # N ⊠ ∄ (>> 月 → C (<> ■ ■ ■ C (<> ■ ■ ■ C (<> ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■
1	self	Self Mode is set to "On" \rightarrow P132 UIM not inserted
	圏外	Out of the service area or poor radio wave reception level \rightarrow P47
	Ta Tan Tant Tant	Radio wave reception level → P47
2		During sending/receiving packet data During i-mode communication \rightarrow P160
	••• ••• •••	During i-mode \rightarrow P160 Public Mode (Drive Mode) is set \rightarrow P70 During Packet Communication
	000	In the area where packet communication is available (location registered) In the area where packet communication is not available (location not registered)
3*	1	The FOMA USB Cable (optional) is connected with "USB Mode Setting" set to "Communication mode"
	-	The FOMA USB Cable is connected with "USB Mode Setting" set to "microSD mode"
	н) ((4	Data is being exchanged via Infrared communication \rightarrow P252
	►))	Infrared communication is connected/in Standby/Infrared remote control is used → P252, P256
	8/*	Bluetooth communication is connected/ in Standby \rightarrow P272



4		An SSL page is open → P161 Connected to a overseas GSM network → P307 Connected to a overseas GPRS network → P308 Connected to a domestic FOMA network → P309 Connected to a overseas 3G network → P308
5 *		During a voice call \rightarrow P52 During a video call \rightarrow P80 There is a datebook Event/Task in which Reminders has been set for the day \rightarrow P261 There is a set alarm \rightarrow P259 "Dialing restrictions" are set to "On" \rightarrow P135 "Lock Application" is set to "On" and there is a function to be locked \rightarrow P133
6*	(Blue)	"Secret Data" is set to "Show". → P136 There are new messages in Voicemail service (1 to 9 messages) → P280 There are new messages in Voicemail service (10 or more messages) → P280 Available space for the Record Message, etc. is low → P76 There is a new message in the Record Message → P76 Record Message is set to "On" → P73

P172 P172 P172 P172 P172 P172
node → P190 ·
 P190 P172 is full de P172
P172 is full de P172
∙ P172 is full de ∙P172
∙ P172 is full de ∙P172
is full de ·P172
de P172
P172
o full
is full de
r the 212
nked P217
creen/ 217
217
7
→P112
→P112
5
I
is full
node
→P190
1 100
P172
is full
de
D170
P172 s full
de
lecord

- *2: When Manner Mode is activated, the manner mode icon takes precedence.
- *3: If you receive mails or messages, the icons of mails or messages take precedence.


Note

- Some characters or symbols appearing on the Display or Sub-display may be partially deformed or abbreviated.
- Icons appearing on the Display or Sub-display are based on the default settings. Depending on changes to your settings, the display of the FOMA handset may appear differently from the illustrations in the operation manual.
- The Display of the FOMA handset employs highprecision production technology, however, there may be instances where there are missing dots or dots that remain on. This is not a manufacturing defect.

Soft Keys

Available operations on the currently opened screen are displayed as Soft Keys at the bottom of the screen. Press the following keys to perform functions corresponding to Soft Keys.

• Different Soft Keys appear depending on the function or display status.

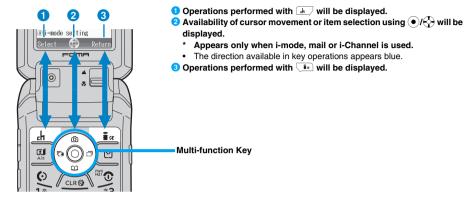

Notation of Soft Key Operations


This manual describes the Soft Key operations as follows.



Corresponding Key Displayed Soft Key

Sub-display

Various kinds of information including the clock or handset status appears on the Subdisplay when the handset is closed.

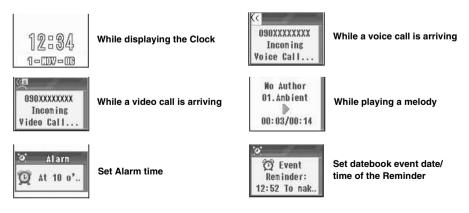

Selecting Menu Items

This FOMA handset offers menus, such as Main Menu or Function menus to perform operations, configure settings or save items.



Main Menu

Icons for Main Menu

Menu Icons	Description
🧯 (i-mode)	Select for using i-mode. You can connect to iMenu, configure settings for i-mode, or check Message R/F.
🔀 (i-appli)	Select for using i-appli. You can view pre-installed i-appli and i-appli downloaded from sites.
(Mail)	Select for using i-mode mail and SMS. You can configure settings to use i-mode mail and SMS.
(Phonebook)	Select for using the Phonebook saved on the FOMA handset or UIM card.
(Databox)	Select for using still images, videos/i-motion movies, melodies, Chara-den, Flash movies, and Voice Notes saved on the FOMA handset or on the microSD memory card.
(Accessories)	Select for using convenient functions such as the Camera, Barcode Reader, Alarm, Datebook, Calculator, or Electronic Dictionaries.
(Connection)	Select for using Infrared Link or Bluetooth, or setting the USB mode when the FOMA USB Cable (optional) is connected.
(Network Services)	Select for using network services including Voicemail, Call Waiting, Call Forwarding, Caller ID Notification services.
(Settings)	Select for configuring the sound or sound volume settings of the FOMA handset, the screen display such as the Wallpaper screen settings, the Clock settings, or security settings to use the FOMA handset securely.

Selecting Functions from Main Menu

This section explains the steps to invoke Main Menu from the Wallpaper screen and open the setting screen of the "Screen Saver".


Press (\bullet) on the Wallpaper screen

Main menu appears.

Use O on Main Menu to move the cursor to W2 (Settings) and press 4 [Select]/



Settings menu

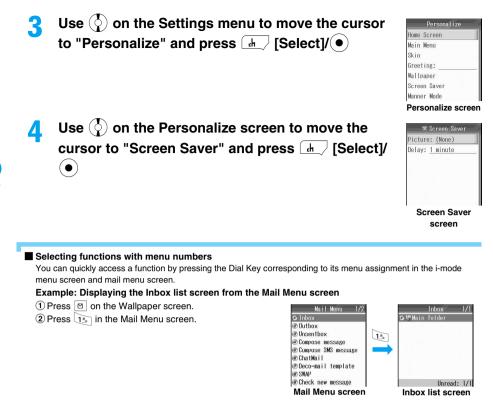

Basic Operations on Each Screen

Returning to the Previous Screen/Wallpaper Screen

Press the following keys to return to the previous screen or pause/cancel the operation to return to the Wallpaper screen.

- (are): Returns to the previous screen.
- Returns to the Wallpaper screen. If a confirmation screen to exit is displayed, press <u>I</u> [Yes] to return to the Wallpaper screen.


Note

Depending on the operation on the FOMA handset, pressing (a) may not return to the Wallpaper screen/the previous screen.

Selecting Setting Items

When the current setting is displayed on the settings screen, you can press \bigotimes or $\overleftarrow{\ast}$ / $\overleftarrow{\ast}$ to switch the setting.

Selecting Menu Items



Note

- You can select an option only for an item on a list of setting items displayed after selecting the item and pressing (•).
- Depending on the item, you may not be able to change the setting or a confirmation screen to change the setting may be displayed.

Authentication

For some functions or services requiring authentication, the security code (P128) entry screen opens. If this entry screen opens, enter the security code using the Dial Keys and press \square [OK]. After the correct code is entered, you can complete the function or advance the steps.




Password entry screen (Example: Security Code entry screen)

The entered security code is masked by asterisks "*".

Function Menu

When "Function" is displayed on the Soft Key, you can call up the Function menu to perform various operations.

• Different function menu items appear depending on the setting/registration status of FOMA handset.



Function menu on a list screen

On the function menu for a list screen, there are some items that apply only to the highlighted item such as "Delete" and other items that apply all items on the list such as "Delete All". Move the cursor to the item before pressing \boxed{h} [Function] when executing an operation that applies to only one item.


Note

- For items that have a sub menu, move the cursor and press \square [Select]/O/O to view the sub menu.
- Press is [Exit]/(is) to close the Function menu.

Notation for Menu Operation

This manual makes explanations by using steps to be performed mainly from the Wallpaper screen. Basically, descriptions of operations are simplified as follows:

Example of Operations



- 1 An icon to press on the Wallpaper screen.
- ② An icon on Main Menu. Use ♀ to move the cursor on the icon and press ▲ [Select]/● to select.
- 3 Menu item names. Use () to move the cursor on an item and press 🖅 [Select]/() to select.

Example of the Function Menu

Items displayed on the function menu may vary depending on the setting or registration status of the FOMA handset.

Record Time48 1 Set recording time for the Record Message of the voice call. 2 Select a recording time (left) 3
Response Greeting Japanese : The language of the voice message is set to Japanese. English : The language of the voice message is set to English. Personal : The Response Greeting is set to Recorded data.
Item names. Use () to move the cursor to an item and press . (Select)() to select.

- Punctional description of items.
- **3** Operational description of items. Operate after selecting **1**.

Item names, function description of items, and operation description of items in the sub menu.

Note

If multiple Function menus such as the Dialed Calls list screen and the Dialed Calls detail screen are collectively
described, Function menu items that do not actually appear may be included depending on the settings or screens.

Notation Rules

Description of steps starting from other than the Wallpaper screen

At the beginning of the description, the status of the handset or the screen to open such as "Incoming" or "List screen" is written.

■ Omitting → [Select]/ • in selection operation

As shown in 3 in "Example of Operations" (P38), to explain a step to select an icon or a function from a list, the operations for fixing such as 🔔 [Select], 💿 are omitted.

Similarly, to explain steps to enter a password or fix entered characters, the operations for fixing such as \boxed{I} [OK]/ \bigcirc are omitted.

Omitting (•) in Steps to Make [] become

Steps for selecting an item with \square and pressing $\textcircled{\bullet}$ to make the item become \checkmark are described as "checkmark" for short, omitting the operation of pressing $\textcircled{\bullet}$.

Using the UIM (FOMA Card)


The UIM is an IC card that contains your subscription information such as your phone number. You can use communication functions including calls, mail, and i-mode communication by inserting the UIM into the handset. Inserting the UIM into another FOMA handset allows you to operate multiple FOMA handsets for various purposes. For details on how to handle the UIM, refer to the UIM instruction manual.

Inserting/Removing the UIM

- Remove the battery pack before inserting/removing the UIM. ${\rightarrow}\mathsf{P41}$
- Turn the handset power off and hold the closed handset in your hand.


Inserting

①Insert the UIM in the direction of the arrow with the IC chip side down




②Slide the UIM and push it in the direction of the arrow

• Push until the UIM locks in its place.



Removing

①Push out the UIM in the direction of the arrow and remove it from the FOMA Card Slot



- Note
- Do not use excessive force inserting the UIM to avoid damaging it.
- Do not misplace the removed UIM.
- If a different UIM is inserted, the call log will be deleted automatically.

Security Code for the UIM

You can assign the security code to the UIM, "UIM PIN" and "UIM PIN2". \rightarrow P129

Operations Restricted by the UIM

The UIM operation restriction function is embedded in the FOMA handset to protect your data/files. The UIM operation restriction is automatically applied to the data/files you obtained by downloading, etc. You can view, play or check the data/files, attach them to mail and send data.

- The following data/files are restricted:
 - Images, melodies, Chara-den, i-appli or i-motion downloaded from web sites or web sites
 - Images or melodies contained in Screen memo
 - Images or melodies attached to an i-mode mail
 - Images or melodies attached or pasted in Message R/F
 - Images inserted in the main text of Deco-mail

Note

- If you have set the data/files restricted with this function for the Wallpaper screen, the settings revert to their default temporarily if another UIM is inserted or no UIM is inserted.
- Pre-installed i-appli programs are not restricted. However, if you delete an i-appli and then download it, the i-appli will be restricted with this function.
- The following data/files are not restricted with this function:
 - Data/files obtained by using Infrared communication, Bluetooth communication, the microSD memory card, or data communications
 - Images captured/edited using this FOMA handset
- Even if a different UIM from the time when data/files were obtained is inserted, the data/files restricted with this function can be deleted.
- If another UIM is inserted, the following settings will be replaced with the ones saved on the inserted card:
 SMS Retention period →P208
 UIM PIN →P129
 User certificate →P174
- If the UIM is inserted into another i-Channel compatible handset, the telop does not appear. Press
 [i-Channel] to display the channel list, then the latest information is downloaded and the telop will be turned on.

UIM Types

UIM comes in 2 types. The following table describes the differences. Be aware of the type when using a function.

Function	UIM (Green)	UIM (Blue)	Reference
The number of digits of a phone number that can be saved to the UIM contact	Up to 26 digits	Up to 20 digits	P95
Operations on User certificate to use FirstPass	Available	Not available	P174
WORLD WING	Available	Not available	P306
Service dialing	Available	Not available	P285

WORLD WING

WORLD WING is DoCoMo's FOMA international roaming service that provides telephone and other types of communications using the same mobile phone number overseas by replacing the green UIM into a FOMA handset or a mobile phone designed for overseas (W-CDMA or GSM systems).

- If you subscribed to the FOMA service after September 1, 2005, a separate subscription is not required. However, if you did not subscribe at the time of your FOMA service subscription or have canceled this service, a separate subscription is required again.
- If you initially subscribed to the FOMA service before August 31, 2005 and have not subscribed to "WORLD WING", a separate subscription is required.
- This service is not available with some billing plans.
- If your UIM card (green) is lost or stolen overseas, contact DoCoMo immediately and temporarily halt the subscription. For contact information, see "DoCoMo Information Center" on the back of this manual. Call and communication charges apply after the handset was lost or stolen are still charged to you.


Inserting/Removing the Battery Pack

• Turn the handset power off and hold the closed handset in your hand.

Inserting


- (1) While pushing the Rear Cover Latch, slide the Rear Cover for approximately 2mm in the direction of the arrow to remove
- 2 Align the groove of the battery pack with the tab of the handset, slide the battery pack in the direction of arrow
 1, and set it by pressing the battery pack in the direction of the arrow
 - Hold the battery pack with the product name side up.
 - When mounting the battery pack, press it underneath the tab and push it down.






Inserting/Removing the Battery Pack

- ③ Align the 4 tabs of the Rear Cover with the grooves of the FOMA handset and insert in the direction of the arrow 1, then slide the cover in the direction of the arrow 2 until the cover clicks into position.
 - If the Rear Cover does not click shut, check whether the 4 tabs and grooves are aligned correctly.



Removing

- While pushing the Rear Cover Latch, slide the Rear Cover for approximately 2mm in the direction of the arrow to remove
- ② Place your finger on the tab of the battery pack and lift the battery pack out in the direction of the arrow

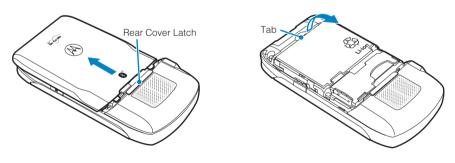

Note

- Using force to insert the battery pack when the UIM is not correctly inserted may damage the UIM.
- Do not use excessive force inserting the battery pack to avoid damaging the terminal of the FOMA handset charging terminals.
- For details on how to handle the battery pack, refer to the instruction manual of Battery Pack M02.

Charging the Mobile Handset

Use the AC adapter (optional) or DC adapter (optional) exclusively designed for the handset to charge the FOMA handset. To make full use of the FOMA handset, use the Battery Pack M02 exclusively designed for the handset.

 You need to connect the FOMA miniUSB Conversion Adapter M01 (accessory) to the FOMA handset to charge the battery pack.

Battery pack lifetime

- Battery packs are consumables. As charging is repeated, available time by each charging will gradually become shorter.
- When an available time of each charging becomes approximately half of that of the time of purchase, it is
 recommended to replace the current battery pack with a new one as early as possible. And, although the
 battery pack may bulge towards the end of its useful life, it is normal.

The lifetime of the battery pack is approximately 1 year. However, it may become shorter if it is charged/ discharged at short intervals repeatedly, charged in an environment of high temperature or left being charged continuously for a long time.

For environmental protection, bring the exhausted battery pack to an NTT DoCoMo, sales agent, or recycle shop.



Charging

- For details, refer to the instruction manuals for the FOMA AC Adapter 01 (optional), FOMA Overseas/ Domestic AC Adapter 01 (optional), and FOMA DC Adapter 01 (optional).
- Insert the battery pack into the FOMA handset before charging the battery pack with the AC or DC adapter. If you try to charge without the battery pack, "Unable to charge" appears and the battery pack cannot be charged.
- Plug/Unplug the connector slowly and securely while avoiding excess force.
- Even during a call, the charge start tone sounds from the Earpiece if charging starts.
- If you start charging the battery pack when it is empty, the handset may not be turned on for a while.
- During a long video call while charging, the inside of the FOMA handset may become hot and charging may stop. If this happens, try charging again later.
- "Invalid Battery" is displayed and charging is not possible if you start charging the battery pack while the battery pack is not installed correctly or if the battery pack is installed to the FOMA handset with the charger connected. In this case, unplug the AC or DC adapter from the FOMA handset, reinstall the battery pack correctly, and then start charging again.

Do not charge the battery pack for a long time (several days) with the handset power turned on

 If the FOMA handset is left with the power turned on for a long time while charging, after the charging completes, the handset uses the power supplied from the battery pack, and the actual time to use the battery pack becomes short and the low battery alert may sound in a short time. In this case, recharge the battery pack properly.

When recharging the battery pack, once disconnect the AC adapter or DC adapter from the handset and reconnect it, then start recharging.

Approximate battery pack usage time

The battery pack usage time may vary depending on the operating environment and the battery pack deterioration.

Network	Continuous standby time	Continuous call time
FOMA/3G		Voice call: Approx. 120 minutes Video call: Approx. 90 minutes
GSM	Approx. 270 hours	900 MHz: Approx. 200 minutes 1800/1900 MHz: Approx. 200 minutes

 Continuous call time is approximate duration of time to be spent for talking with normal radio wave reception level.

- · Continuous standby time is approximate duration of time in motion with normal radio wave reception level. Depending on the battery level, set functions, operating environment such as ambient temperature, radio wave reception level (Poor or weak radio wave reception level) or Bluetooth usage, Continuous call time can reduced to half. When i-mode communications are performed, the call (communication)/standby time becomes shorter. Even if you do not make calls or perform i-mode communications, the call (communication)/standby time becomes short if you compose an i-mode mail, start a downloaded i-appli, start the i-appli stand-by screen, perform data communications or multiaccess, use a camera, or playback videos or melodies.
- Depending on network conditions in your location, this may be shorter than the published values.
- Continuous standby time in a stationary state is the average usage time in a stationary state with normal radio wave reception level while the handset is closed.
- · Continuous standby time in motion is the average usage time in a state combining "standstill", "in motion" and "out of coverage" in an area with normal radio wave reception level while the handset is closed.

Estimated battery pack charging time


FOMA AC Adapter 01	Approx. 140 minutes
FOMA DC Adapter 01	Approx. 140 minutes

 The estimated charging time is the duration of time to charge the battery pack with the FOMA handset turned off and with a fully drained battery pack. The charging time becomes longer with the FOMA handset turned on.

Charging with AC Adapter/DC Adapter

This section refers to the AC adapter (optional) and DC adapter (optional) as "adapter".

- **1**Open the cover of the External Connector Terminal and plug the FOMA miniUSB Conversion Adapter M01 (accessory)
 - There is 2mm-gap between the handset and the FOMA miniUSB Conversion Adapter M01. This is normal.
- 2 Plug the adapter connector, with the engraved side up, straight into the FOMA miniUSB Conversion Adapter M01
 - · Slide the connector securely until it clicks into place.



Conversion Adapter M01 (accessory)

Connector




Plug in straight with the engraved side up

Charging the Mobile Handset

③Insert the adapter plug into an outlet/ the cigarette lighter socket of a car The charge start tone sounds and

The charge start tone sounds and charging begins.


- While charging, and a the top of the screen blinks and a message "Charging" appears. The Charging Illumination Indicator lights in red.
- When charging completes, **MIN** at the top of the screen lights and a message "Charge Complete" appears.



- ⑤ Press the release buttons and unplug the adapter connector from the FOMA miniUSB Conversion Adapter M01 (accessory)
 - When unplugging the adapter connector from the FOMA miniUSB Conversion Adapter M01, hold the release buttons of the connector and pull it straight out. Do not use excessive force pulling out the connecter to avoid damaging it.

⁽⁶⁾Unplug the FOMA miniUSB Conversion Adapter M01 from the handset and close the cap of the External Connector Terminal

 When disconnecting the FOMA miniUSB Conversion Adapter M01 from the FOMA handset, pull the adapter straight out. Do not use excessive force pulling out the connecter to avoid damaging it.





Note

- You can set whether to light the Charging Indicator during charging. →P126
- When charging with the handset power turned off, the Charging Indicator may not light immediately after charging starts.

Continued on the next page ••• 45

④Unplug the adapter plug from the outlet/cigarette lighter socket of a car after charging completes

When using the handset overseas, check the voltage and the power socket shape used where you are, and charge
using the FOMA overseas-compatible AC adapter 01(optional) and a commercially available conversion plug
adapter appropriate for the location(do not use a transformer for overseas travel).

AC Adapter/DC Adapter

• Use the adapter with the specified power source and voltage. Failing to do so may result in fire or malfunction.

DC Adapter

- The DC adapter is exclusive for a negative ground car (12V/24V).
- A fuse (2A) is a consumable item. Purchase a replacement fuse from any car parts shop.
- Do not charge while the car engine is not running to avoid exhausting the car battery.

Battery Meter

Checking the Battery Level

An icon indicating the approximate battery level is displayed at the top of the screen.

- **I**II (Green): The battery level is almost full.
- (Green): The battery level is getting low.
 - (Yellow): The battery level is almost empty. Start charging.
 - (Red): The battery pack is exhausted. The handset will turn itself off in a moment. Charge the battery pack.

Checking Battery Level with the Display

Approximate battery level can be checked in 6 levels.

● ♦ 🙀 (Settings) ♦ "Phone Status" ♦ "Battery Meter"

- 6-5 : The battery level is almost full.
- 4-3 : The battery level is getting low.
- 2-1 : The battery level is almost empty. Start charging.
- 0 : The battery pack is exhausted. The handset will turn itself off in a moment. Charge the battery pack.

When the battery pack is running out

The low battery alert, "pico", sounds approximately every 3 minutes. The appears at the top of the screen and a message "Low Battery" appears. You can keep using the handset after the Low Battery Alert sounds; however, the handset power will be automatically turned off momentarily. During a call, the low battery alert sounds from the Earpiece every 30 seconds. You can keep talking, however, the call will be terminated momentarily when the handset power is automatically turned off.

Tatl a	WIN		(64
	Lars I	Battery	
			12:34



Battery:

Turning the Power On/Off

Turning the Power On

🐨 👽 when the handset is turned off

The keypad lighting of the FOMA handset will turn on and the handset will vibrate. Then, the screen changes from the Start-up screen → Wake-up screen \rightarrow My Number display screen and then the Wallpaper screen appears.

• Depending on signal reception, the Network search/register screen may open before the Wallpaper screen opens.

Wallpaper screen

Note

- A message can be displayed after displaying the Wake-up screen. →P122
- A message indicating the UIM is not inserted appears if the UIM is not inserted or the UIM is malfunctioning.
- A call may be disconnected even if the handset is not moved with industry displayed.
- If "Profile" is set to "Vibrate", the FOMA handset vibrates when you turn it on/off. .
- It may take a while to open the Wallpaper screen depending on the memory usage. •
- Setting Time and Date →P48
- Sending Caller ID → P49
- Changing Passwords →P130

When the "UIM PIN" is set to "On"

After the Wake-up screen opens, the UIM PIN (P129) entry screen opens. Enter the UIM PIN to open the Wallpaper screen.

"Automatic Lock" in "Phone Lock" is set to "On"

After the Wake-up screen opens, the Unlock Code (P128) entry screen opens. Enter the Unlock Code to open the Wallpaper screen.

When "Prompt At Power Up" of "Self Mode" is set to "On"

After the Start-up screen opens, a confirmation screen of whether to set Self Mode opens. Press A [Yes] to set Self Mode, then the Wallpaper screen opens.

If you activate Public Mode (Drive Mode) before turning off the handset

After the My Number display screen opens, a confirmation screen of whether to deactivate Public Mode (Drive Mode) opens. Press I [Yes] to deactivate Public Mode (Drive Mode), then the Wallpaper screen opens.

When an i-appli Stand-by Screen is Set

After the Wallpaper screen opens, a confirmation screen whether to start the i-appli stand-by screen opens. Press [Yes] or do not take any action for 2 seconds to start the i-appli stand-by screen automatically.

■ When 圏外 appears at the top of the screen

You are out of the service area or in the poor radio wave reception level. Move to a location where the icon indicating the radio wave reception level appears. The radio wave reception level is indicated in 5 levels as follows: $T_{att} \rightarrow T_{at} \rightarrow T_{at} \rightarrow T_{a} \rightarrow T_{a}$

Strong Weak







Turning the Power Off

🐨 👽 (for 2+ seconds) when the handset is turned on

The Exit screen opens and the power is turned off.

Language

Switching the Display Language to English

Default Japanese

You can switch the language of the displayed function names or messages (specific to the FOMA handset) between Japanese and English.

🚻 (Settings) 🕨 "General Settings" 🕨 "Language" 🕨 Perform the following operations

Automatic

In accord with the setting saved on the UIM.

日本語 (Japanese) Change to Japanese.

English Change to English.

Select an option • [I] [Select]

Note

• Using this FOMA handset, the settings of this function are recorded on the UIM.

Automatic

• When inserting the UIM is saved setting, "Language" is operated.


To switch the display language from English to Japanese ● ◆ W (Settings) ◆ "General Settings" ◆ "Language" ◆ "日本語 (Japanese)"

Time and Date

Setting Time and Date

Default Time Zone: Tokyo(GMT+9:0) Date Format: 31-DEC-99 Auto Update: ON(Time only)

You can change the time zone or the date format. Also, you can set to update the time automatically.



hh:mm

When "Auto Update" is set to "Off", set the time and display format manually. Set the time and format manually. ▶ Use 😔 to select "Hour", "Minute", or "Display Format" field ▶ Use 🔇//Dial Keys to enter the time

Caller ID Notification

Time Zone

Set the time zone for the current date and time.

Select a time zone

A day of the week XX - XXX - XX

When "Auto Update" is set to "Off", set the date manually. Set the date. Data of the range from 1998/01/01 to 2097/12/31 can be set.

♦ Use 😔 to select the "Day", "Month", or "Year" field ♦ Use ()/Dial Keys to enter the date

Date Format

Set the format for the date.

"12/31/99"/"31-DEC-99"

Auto Update

Set whether to update the time on the FOMA handset based on the time information from the network.

ON (Time and time zone)	: The date and time are updated automatically. If you move to a different time zone,
	the time zone is also adjusted automatically.
	▶ 🚽 [Yes]
ON (Time only)	: The date and time are updated automatically, however, Time zone is not updated.
Off	: Auto update will not be performed.

Note

Time Zone

 A time zone is one of the world standard regional time bands. Standard time is expressed as the difference between the current time zone and Greenwich mean time (GMT). Standard time in Japan is expressed as "GMT+9:0" because it is 9 hours earlier than GMT.

Auto Update

- Time may not be updated depending on the radio wave reception level.
- When using the FOMA handset overseas, the time or time zone may not be updated depending on the network in use. And, the time may not be displayed properly. Use the handset after setting the time of the place you stay by World Clock. →P269
- · Time is not updated when an i-appli is running.
- Update will not be performed if the UIM is not inserted.
- An error of a few seconds may occur.
- In "ON (Time and time zone)" set, when the time is updated, the time for the saved Event/Task is also automatically
 updated.

Caller ID Notification

Sending Caller ID

You can set to show/hide your Caller ID to the network in advance.

- Your Caller ID (phone number) is valuable information. Be cautious about sending your Caller ID.
- Caller ID Notification cannot be set when 圈外 is displayed.

● ▶ 溪 (Network Services) ▶ "Caller ID Notification" ▶ Perform the following operations

Change Notification Setting

Set to show/hide Caller ID.

"Show Caller ID"/"Hide Caller ID" Show Caller ID" Enter the Network Security Code

Status Request Check the setting of the Caller ID.

Note

- Your Caller ID is only displayed if the other party's phone is capable of displaying it.
- You can set to Caller ID Notification for each dialed call. →P56

Viewing Number

Viewing Your Own Number

You can view your own phone number (My Number) saved in the UIM.



If your name is saved, the name also appears.

- Press over within 2 seconds after pressing (•).
- To view the saved detailed information

 ${\tt Press}$ $\fbox{\ }$ [Function] and select "Display All Info", then enter the Security Code.

Time and Date 12:34 Time Zone: Tokyo(GMT+... WED 1 - NOV-O6 Date Format Auto Update:ON(Time o...

My Personal Info screen

Note

You can save your name or Email address under "My Personal Info". →P265

Making/Answering Calls

Making a Call	
Making a Call	52
Calling the Same Party Again	54
Showing/Hiding Caller ID for Each Call	56
Sending Touch-tone Signals Quickly <pause></pause>	57
Making International Calls	58
Making a Call by Specifying a Sub Address	61
Displaying Call Time and Activating Notification Beep during a Call 	62
Talking Using Handsfree	62
Talking in a Car with Hands Free <in-car handsfree=""></in-car>	63
Talking via Bluetooth	63
Answering a Call	
Receiving a Call	63
Answering a Call by Pressing any Dial Key	65
Answering a Call by Opening the Handset < Open To Answer>	65
Received Calls <received calls=""></received>	66
Adjusting the Earpiece Volume during a Call < Earpiece Volume>	67
Adjusting the Ring Volume	67
When You are/were Unable to Answer Calls	
Placing a Call on Hold When You Cannot Answer a Call Immediately	
<response hold=""></response>	68
Setting the Response Hold Tone <voicecall answer="" hold="" tone=""></voicecall>	68
Placing a Call on Hold	70
Public Mode (Drive Mode) <public (drive="" mode="" mode)=""></public>	70
Public Mode (Power Off) <public (power="" mode="" off)=""></public>	72
Checking Missed Calls < Missed Call>	73
Recording of Voice/Video-clip Message from a Caller When You Cannot Answer a Call	73
Playing/Deleting Record Message	77

Making a Call

Enter a phone number

- Up to 64 digits can be entered. As more than 64 digits are entered, the first entered digits will be deleted.
- Start from the area code even for a local call.
- Istore]: Go to Step 2 (P97) in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls".
- To make a call to a fixed line phone

Area Code - City Code - Phone Number

- To make a call to a mobile phone 090 - XXXX - XXXX/080 - XXXX - XXXX
- To make a call to a PHS 070 - XXXX - XXXX



A ringing tone sounds from the Earpiece, and the Dialing screen with "Voice Calling..." displayed opens until the other party answers the call.

Iswap]: Use the multitask function. →P258

ాల to terminate the call

Note

- If you hear the voice guidance of Caller ID Request, make a call again sending the Caller ID.
- When the phone number cannot be dialed due to poor signal reception, a message of "Call Failed" appears, Press [Retry] to redial the number, and when ringing starts, an alarm sounds.
- · You cannot switch to a video call during a voice call using this FOMA handset.
- Closing the FOMA handset during a call terminates the call. However, when using the miniUSB Stereo Headset M01 (optional) or In-Car Handsfree, etc., the call will not be terminated when the handset is closed.
- When the other party terminates the call, the call end tone sounds, "pilolo", from the Earpiece.
- If a charge starts during a call, the charge start tone sounds from the Earpiece.
- When the battery becomes low during a call, the low battery alert, "pico", sounds from the Earpiece every 30 seconds. You can keep talking,; however, the call will be terminated momentarily when the handset power is automatically turned off.
- When you call a special number such as "113", "114", "171", or "1419", this FOMA handset behaves as follows:
 - Even if the call is connected to the network and you can hear the voice guidance, the Dialing screen stays open.
 - Even if you send push signals(DTMF) by pressing Dial Keys, the entered digits do not appear on the screen.
 - After operations are finished and the call is disconnected from the network, a message of "Call Failed" may appear.

To correct an entered phone number

To delete an entered digit, use $\langle \cdot \rangle$ to move the cursor to the right of the digit and press \overline{are} .

To add a digit, use 💮 to move the cursor to the position and enter the digit with the Dial Keys.

Screen display during dialing

The other party's name appears if the other party is saved in the Phonebook. However, when a call is made to the other party that has been set "Secret Data" to "Hide" and set the Phonebook entry to Secret, the phone number is displayed.





Phone number entry screen (P52) • [Function] • Perform the following operations

Attach Number

Quote the phonebook or Dialed/Received Calls and enter the phone number.

Phonebook :	 A phone number will be quoted from the Phonebook. ♦ Select a Phonebook entry ♦ ●
Dialed Calls :	A phone number will be quoted from Dialed Calls. ♦ Select an entry ♦ ●
Received Calls :	 A phone number will be quoted from Received Calls. ♦ Select an entry ♦ ●

Insert

Enter "p"/"w"/"n" after the entered phone number. →P57

Caller ID

Make a call after setting to show/hide the Caller ID. →P56

Video Call

Make a video call to the entered phone number.

Send SMS

The entered phone number becomes the destination. Compose and send an SMS. \rightarrow P206

Multi Number

Select a number to use for Caller ID when making calls. →P286

Add Intl Access No.

Add an international access number at the beginning of the entered phone number. →P59

Add Country Code

Add a country code at the beginning of the entered phone number. \rightarrow P310

Editing Function

When "New Call" is selected from the Function menu during a call to open the Phone number entry screen and a phone number is being entered, you can edit the characters. \rightarrow P298

Cancel Entry

Close the Phone number entry screen opened by selecting "New Call" from the function menu during a call.

Note

Attach Number

- Selecting "New Call" from the function menu during a call will bring up the Phone number entry screen with "Browse" displayed.

Video Call

If you select "New Call" from the function menu during a call to display the Phone number entry screen, then enter a
phone number to perform this operation, a confirmation screen whether to dial after disconnecting the current call will
be displayed. Pressing here (Yes) terminates the active call and makes a video call to the newly dialed phone number.

Function Menu on the Voice Call Screen

Voice Call screen (P52) ♦ → [Function] ♦ Perform the following operations

Swap

Use Multitasking during a call using Call Waiting service. →P258

Spkrphone On/Spkrphone Off

Make/cancel a Handsfree call. The other party's voice comes from the Speaker during a handsfree call. →P62

My Personal Info

Display your phone number.

Hold/Resume

Place the call on hold/resume the active call. →P70

Mute/Unmute

Set/cancel mute. Your voice will not be sent to the other party when mute is set.

Bluetooth/Handset

The call will be switched to an already connected Bluetooth device/FOMA handset.

New Call

Place the active call on hold and makes another call. →P282

End Call on Hold

Terminate the call on hold during a call using Call Waiting service.

Dialed Calls

Open the Dialed Calls list screen.

Received Calls

Open the Received Calls list screen.

Dialed Calls

Calling the Same Party Again

Up to 60 entries can be saved in the Dialed Calls for both voice calls and video calls. A phone number, dialed date and time, call time, and show/hide Caller ID are saved in the Dialed Calls.

· If there are more than 60 entries, the oldest entries will be overwritten first.

 A Dialed Call entry from the caller saved in the Phonebook has the name and type icon (P93) displayed. If you save the same phone number with multiple names, the name first saved on the FOMA handset (Phone) contact is displayed. If the other party is not saved in the Phonebook, the phone number and a are displayed.

Icons on	the Dialed	Calls list	screen
----------	------------	------------	--------

lcon	Outgoing Method
€\$/€⇒	Voice Call/Voice Call (Missed Dialed Call)
\$î/\$î	Voice Call/Voice Call (Missed Dialed Call) *Additional Number 1 of "Multi Number" used
\$2/\$2	Voice Call/Voice Call (Missed Dialed Call) *Additional Number 2 of "Multi Number" used
	Video Call/Video Call (Missed Dialed Call)
G / G	Video Call/Video Call (Missed Dialed Call) *Additional Number 1 of "Multi Number" used
6 2/ 6 2	Video Call/Video Call (Missed Dialed Call) *Additional Number 2 of "Multi Number" used
(-/(Data Communication/Data Communication (Missed Dialed Call)
C1./C1.	Data Communication/Data Communication (Missed Dialed Call) *Additional Number 1 of "Multi Number" used
(² ,/(²	Data Communication/Data communication (Missed Dialed Call) *Additional Number 1 of "Multi Number" used



Select an entry ()

Name and type icon saved in the Phonebook

If the name and icon are not saved in the Phonebook. 🔚 and "Unregistered" are displayed.

2 The other party's phone number

Oialed date and time

4 Call time

This does not appear for a missed dialed call.

Setting of Caller ID notification service

If you specify Show ID/Hide ID under "Caller ID" in the Function menu when dialing, "Show ID" or "Hide ID" is displayed.

Openation of the second sec

If you subscribe to Multi Number and specified a phone number to be dialed from using "Multi Number" in the Function menu when dialing, "基本契約番号 (Basic Number)"/"付加番号1 (Additional Number 1)"/"付加番号2 (Additional Number 2)" is displayed(if the name has been changed using "Multi Number", the registered name is displayed).

Θ 1

The Phone number entry screen opens with the phone number entered.



To make a video call

Press 💹 .

Note

- · You can also make a call by selecting an entry on the Dialed Calls list screen and performing Step 3 and subsequent steps.
- The phone number appears in the call log made to the other party set the Phonebook entry to Secret if "Secret Data" is set to "Hide".
- If a dialed phone number has 50 or more digits, only the first 50 digits will be recorded in the history.
- · When "Dialing Restriction" is set to "On", the call log will be deleted automatically. Calls made using the Phonebook after the setting will be recorded in the history, however, you cannot make a call using the entry recorded in Dialed Calls.

Function Menu on the Dialed Calls List Screen/Dialed Calls Detail Screen

The Function menu is available only when an entry is recorded in the history.

Dialed Calls list screen (P54)/Dialed Calls detail screen (P55) [Function] Perform the following operations сh

Store

Store a phone number in a Contact if the selected/displayed phone number in the call log is unregistered. Go to Step 2 (P97) in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls".

Video Call

The Phone number entry screen opens with the phone number of the history entry already entered, and a video call will be made.

ا ي (●)

E DoCoMo Taro

1 - NOV - 06 12:34

Dialed Calls detail

screen

090XXXXXXXX

00:05:04

Show ID 基本契約番号

ā

Delete

Delete the selected/displayed entry.

▶ ▲ [Yes]

Delete All

Delete all entries from the Dialed Calls.

♦ 🖃 [Yes]

Caller ID

Make a call setting show/hide Caller ID. →P56

Send SMS

Create and send a new SMS message with the phone number in the Dialed Calls. →P206

Add Digits

Open the Phone number entry screen with the phone number in the history entered and make a voice call.

♦ (•) (•)

Multi Number

Select a number and make a call. →P286

Copy All Text

Copy all text on the Dialed Calls detail screen.

Note

• When "Dialing Restriction" is set to "On", you cannot select "Store", "Delete", "Delete All" or "Add Digits".

Calling the Last Dialed Number

You can open the Phone number entry screen with the last dialed number entered to make a call easily.

● ♦ 🌆 (Accessories) ♦ "Recent Calls" ♦ "Notepad"

The Phone number entry screen opens with the phone number entered.

<u>ر</u>کا (

To make a video call Press .

184/186

Showing/Hiding Caller ID for Each Call

There are 2 ways to show/hide Caller ID for each call: adding "184"/"186", or using the function menu on the Phone number entry screen.

Showing/Hiding Caller ID by Adding 184/186



Enter "184"/"186" Enter the phone number

To show Caller ID Enter "186" before the phone number.

To hide Caller ID Enter "184" before the phone number.



Sh	owing/Hiding Caller ID Using the Function Menu
1	Enter the phone number I [Function] < "Caller ID" "Show ID"/"Hide ID"
2	$\textcircled{\diamond}$
	To make a video call Press 🖫.
Not	te
• The	e same operation is available from the the list/detail screen of Phonebook, Dialed Calls and Received Calls.

You can set to show/hide Caller ID to the network in advance. →P49

Pause


Sending Touch-tone Signals Quickly

Enter "p"/"w"/"n" and a number after the phone number and make a voice call to send number after the alphabetic character as touch-tone signals (DTMF).

· Signals may not be received depending on the device on the receiving side.

Entering "p"

A call can be made entering a "p" after the phone number. After the number before "p" is connected, the number after "p" is sent in DTMF approximately 3 seconds later. This function is convenient for dialing an extension after a phone number is connected.



After the call is connected, the number after "p" is sent automatically.

Entering "w"

A call can be made entering a "w" after the phone number. When the number before "w" is connected, the number after "w" is keyed in waiting to be sent in DTMF. This function is convenient for sending a message to a pager, reserving tickets, or checking the balance of your bank account over the phone.





Entering "n"

You can make a call entering "n" after a phone number and entering a number to be sent instead of "n". After the number before "n" is connected, the number entered for "n" is sent in DTMF. This function is convenient to make an international credit card call that is connected using the access number and then requires a credit card number, PIN number or a phone number.

Enter a phone number ♦ 🖅 [Function] ♦ "Insert" ♦ "n" ♦ Enter a number to send ♦ ⓒ //●

The entry screen of the number to be sent instead of "n" appears.

9 Enter a number

When the call is connected, the entered number is sent instead of "n".

WORLD CALL

Making International Calls

WORLD CALL is an international calling service available from a DoCoMo mobile phone. FOMA service subscribers are also signed up for WORLD CALL at the time of initial subscription (except subscribers explicitly declining this service).

- You can make calls to approximately 240 countries and regions around the world.
- Charges for "WORLD CALL" are added to the monthly FOMA service call charges.
- No initial fee and no fixed monthly charges apply.
- This service is not available with some billing plans.
- For details on WORLD CALL, contact the "DoCoMo Information Center" shown on the back of this manual.
- When using international carriers other than DoCoMo, contact the carrier directly.

Change to the International Call Dialing Procedure

The "MY LINE" service is not applicable to mobile phone communications, including WORLD CALL service. Along with the introduction of the "MY LINE" service, the dialing procedure for international communications using a mobile phone has been changed. Consequently, the previous dialing procedure (Omitting "010" from the following dialing procedure) can no longer be used.

An "International Video Call" to an overseas party with a specific 3G mobile phone can be made by pressing $\overline{\mathfrak{A}}$ after the following dialing procedures.

• For information about the countries where connection can be made and telecommunications carriers, visit the DoCoMo's web site.

• The other party's image displayed on the FOMA handset may blur and may be unable to be connected depending on the handset connecting the international video-phone.

Making an International Call by Entering a Phone Number

Enter the phone number in the following format:

1

Enter "009130-010-Country Code-Area Code (City Code)-Phone Number"

• Omit the leading "0" (zero) from the area code (city code) (in some countries or regions such as Italy, the leading "0" may be required)



Making an International Call Using "+"

Enter "+" at the beginning of a phone number and dial to replace "+" with an international access code automatically. Press <u>'0</u>^(*) for 1+ seconds to enter "+".

• The WORLD CALL (009130010) is set to be added automatically by default. \rightarrow P60

• 0 號 (for 1+ seconds) ♦ Enter "Country Code - Area Code (City Code) - Phone Number"

 Omit the leading "0" (zero) from the area code (city code) (in some countries or regions such as Italy, the leading "0" may be required).



©)(•

• On the dialed call confirmation screen, the phone number with the international number added will be displayed.



Dialing confirmation screen

To make a video call Press 🖼.

Call] 🕞 🕞

• (ir) [Original No] : Make a call without converting "+" into an International Access Code.

Note

- This option is available only inside the FOMA network service area.
- If the phone number has "+81" as its prefix, "+" will not be converted into the International Access Code.

Making an International Call Selecting Storing International Access Code

You can select an international access code from the function menu and add it to the phone number.

1

Enter "Country Code - Area Code (City Code) - Phone Number"

• Omit the leading "0" (zero) from the area code (city code) (in some countries or regions such as Italy, the leading "0" may be required).

2

IFunction] ♦ "Add Intl Access No." ♦ Select an international access number ♦ International access number

The international access code is added at the beginning of the phone number.

0 •

To make a video call Press .

 WORLD CALL is set as the international access code by default. International access codes can be stored in "Intl Access Code". →P60

Making an International Call Easily

Setting to Add the International Access Code Automatically

Default Auto Assist: On Access Code: WORLD CALL (009130010)

You can set whether to add an international access code automatically instead of "+" when you make a call by entering "+" at the beginning of the phone number. Also, you can specify the international access code to be added automatically.

Note

(●) ♦ 🔐 (Settings) ♦ "In-Call Setup" ♦ "Intl Dial Settings" ♦ "Intl Access Code" ♦ "Auto-Assist Settings" ♦ Perform the following operations

Auto Assist

♦ "On"/"Off"

Access Code

International Call Setting

Storing International Access Codes

Default WORLD CALL (009130010)

Up to 3 international access codes can be stored.

• (•): View/modify the stored international access codes.

(●) ♦ ₩ (Settings) ♦ "In-Call Setup" ♦ "Intl Dial Settings" ♦ "Intl Access Code" ♦ "IDD Prefix Settings"



IDD Prefix Settings screen

"[New Entry]" Perform the following operations

Name


Store the name of the international access code. Up to 16 full-pitch/half-pitch characters can be entered.

Enter a name

Access Code

Up to 10 digits can be stored.

Enter an international access code



Sub Address

Note

- The following operations can be performed by pressing (Function) on the international access code entry screen:
 - Selecting "Insert" → "Pause", "Wait" or "n" enters "p", "w" or "n" in the order after the entered phone number.
 →P57
 - Select "Editing Function" to edit the characters. →P298
 - Select "Cancel Entry" to cancel the entry.

Function Menu on the IDD Prefix Settings Screen

IDD Prefix Settings screen (P60) Function Perform the following operations

Edit

You can correct the selected international access code. Go to Step 2 in "Storing International Access Codes" (P60).

Delete

The selected international access code will be deleted.

New

Go to Step 2 in "Storing International Access Codes" (P60).

Note

Edit

The pre-installed "WORLD CALL" number can also be edited.

Delete

The international access number set in "Access Code" in "Auto-Assist Settings" cannot be deleted.

Sub Address

Making a Call by Specifying a Sub Address

Default On

You can set whether digits after "*" of a phone number with "*" inserted are identified as a sub-address. A sub-address is used to call up a specific device connected to an ISDN line or to select contents on "V live".



Note

- "*" is not identified as a delimiter of a sub-address if:
 - "*" is entered at the beginning of the phone number.
 - A specific number such as "184" or "186" is entered at the beginning of the phone number and "*" is entered right after it.

In-Call Timer

Displaying Call Time and Activating Notification Beep during a Call

Default Display: Time Beep: Off

Set whether to display call duration on the Voice Call screen or Video call screen. You can set to sound a warning alarm if a set duration elapses during a call.

🍽 🕨 (Settings) 🕨 "In-Call Setup" 🕨 "In-Call Timer" 🕨 Perform the following operations

Display

Time : Show the duration of the call.

Off : Hide the duration of the call.

Веер

Enter an interval between Beeps of the range from 1 second to 999 seconds.

- "60 seconds"/"Off" Enter an interval
- · The alarm setting completes if you select "Off".

Note

Beep

- · Even if Manner Mode is activated or "Profile" is set to "Vibrate"/"Silent", the beep sounds regardless of the setting of "Key Volume".
- The following operations can be performed by pressing . [Function] on the alarm interval entry screen:
 - Select "Editing Function" to edit the characters. →P298
 - Select "Cancel Entry" to cancel the entry.

Talking Using Handsfree

To cancel a handsfree call

You can set to hear the other party's voice from the Speaker during a call.



Voice Call screen (P52) "Spkrphone On"

Press I [Function] to select "Spkrphone Off".



Voice Call screen (During a handsfree call)

Note

- It is recommended that you use the speakerPhone within 50 cm from the FOMA handset during the handsfree call.
- If you set "Earpiece Volume" to "0", the other party's voice is not heard from the Speaker (Your voice is sent to the other party).
- To operate during a video call. →P83

Talking in a Car with Hands Free

Connecting the handset to a handsfree device, such as an In-Car Handsfree Kit 01 (optional), a car navigation system or Bluetooth, allows you to make or receive a voice call from a handsfree device.

For operations of a handsfree device, refer to the user manual of the device.

Note

- · Depending on the characteristics or specifications of the connecting device, data may not be exchanged after connectina.
- If you connect the handset with a Bluetooth handsfree device via a Bluetooth connection, register the device before connecting.
- · Screen display for incoming or a ringtone is in accord with the settings on the handset.
- When you switch to handsfree, a ringtone may sound from the handsfree device even if Manner Mode is activated or "Ring Volume" is set to "0" for the handset.
- The incoming call actions with Public Mode (Drive Mode) activated are in accord with Public Mode (Drive Mode) settings.
- The incoming call actions with Record Message is set to "On", it is in accord with the "Record Message" settings.
- Folding the handset during a call does not disconnect the call.
- · You can make a call using the first or the second memory number (Speed No.) of the FOMA card Phonebook only. This FOMA handset (Phone) Phonebook does not have memory numbers, so you cannot make a call using a memory number.

Talking via Bluetooth

You can talk connecting the handset to a commercially available Bluetooth device such as a Bluetooth device.

- Register and connect the Bluetooth device to use in advance. →P274
- For operations of a Bluetooth device, refer to the user manual of the device.

Make/Receive a Call using a Bluetooth device

Note

 appears at the top of the screen when the handset is connected to a Bluetooth device.

To switch to a Bluetooth device/the FOMA handset during a call

Press [h] [Function] on the Voice Call screen (P52)/Video call screen (P81) and select "Bluetooth"/"Handset".

Receiving a Call



A call arrives

The ringtone sounds.

- [•]//. Stop the ringtone or vibration.
- I Place an incoming call on hold. →P68



Answer the call.



to terminate the call

Display of the Incoming call screen (with Caller ID)

If the other party is saved in the Phonebook, the name and type (P93) are displayed. If an image or video/i-motion is saved, the saved image or video/i-motion is displayed/played.

- Depending on the FOMA handset settings or Phonebook entry saving status, a video/i-motion movie saved in a Phonebook entry may not be played.
- When "Secret Data" is set to "Hide" and a call is made to the other party set the Phonebook entry to Secret, the phone number appears.
- If a call arrives to an additional number of Multi Number, the ringtone set for "Multi Number" sounds and the following icon appears on the incoming screen (When the caller is stored in a Phonebook entry, and an image is registered, the icon will not be displayed):
 - 🙏 / 💏 : Incoming voice call
 - 1 / Reprint Provided Call
 - ζ¹ / ζ² : Incoming data

Display on the incoming call screen (without Caller ID)

The reason for no Caller ID is displayed instead of a phone number. →P137

Note

- When "Ring Lights" is set to something other than "None", the Illumination Indicator blinks for incoming calls or Email.
- The incoming call actions such as a ringtone or vibration vary depending on the settings in "Profile" or the settings saved in the Phonebook. →P93, P112, P115
- When Manner Mode is activated, the ringtone does not sound. When Public Mode (Drive Mode) is set, the ringtone does not sound and the Illumination Indicator does not blink.
- · When "Open to Answer" is set to "On", you can answer a call by opening the handset.
- Folding the FOMA handset during a call terminates the call. However, when using the miniUSB Stereo Headset M01 (optional) or In-Car Handsfree, etc., the call will not be terminated when the handset is closed.
- When the other party terminates the call, the call end tone sounds, "pilolo", from the Earpiece.
- If a charge starts during a call, the charge start tone sounds from the Earpiece.
- When the Public Mode (Drive Mode) is activated, incoming call actions such as sounding the ringtone or blinking the Illumination Indicator will not take place. Also, even if a call arrives when the display is turned off, the backlight of the display will not be turned on.
- You can set "Ring Delay" to delay the incoming call actions for a call made from the other party not saved in the Phonebook.
- · Use the following functions to reject incoming calls from a caller not saved in Contacts/specific caller.
 - Set "Not in Phonebook" to "Reject".
 - Set "Reject Calls" of Phonebook to "Yes".
- You cannot switch to a video call during a voice call using this FOMA handset.

Function Menu on the Incoming Call Screen

Incoming call screen (P63) • 🖃 [Function] • Perform the following operations

Answer Answer an incoming call.

End Active Call & Answer

Terminate the active call to answer an incoming call.

End Held Call & Answer

Terminates a call on hold to answer an incoming call when another incoming call arrives during a call using Call Waiting Service.

Ignore

Reject an incoming call and hang up.

Response Hold

Place the call on hold.

Forward to Voicemail

Connect a call to the Voicemail service center.

Call Forward

Transfer an incoming call to the specified number.

Note

End Active Call & Answer/End Held Call & Answer

• This option is not available unless you subscribe to the Call Waiting service.

Forward to Voicemail

· This option is not available unless you subscribe to the Voicemail service.

Call Forward

 This option is not available unless you subscribe to the Call Forwarding service and you specify a forwarding destination.

Multi-key

Answering a Call by Pressing any Dial Key

Default Off

You can set to answer a voice call by pressing a key other than \sqrt{i} [Answer], \overline{ullet} >.

● ♦ 🙀 (Settings) ♦ "In-Call Setup" ♦ "Answer Options" ♦ "Multi-key" ♦ "On"/"Off"

Note

- After setting, the following keys can be used to answer a call.

 ¹
 ¹
- This function is not available when a video call arrives.

Open To Answer

Answering a Call by Opening the Handset

Default Off

You can set to answer a voice or video call by simply opening the handset when a call arrives while the handset is closed.



● ♦ ₩ (Settings) ♦ "In-Call Setup" ♦ "Answer Options" ♦ "Open To Answer" ♦ "On"/"Off"

Received Calls

Note

Received Calls

Up to 60 incoming voice or video call entries are recorded in Received Calls. A phone number, received date and time, call time, and the information that Caller ID was shown/ hidden are recorded in the entries.

• If there are more than 60 entries, the oldest entries will be overwritten first.

 The name and type icon (P93) appear in the Received Calls from the other party saved in the Phonebook. If you save the same phone number with multiple names, the name first saved on the FOMA handset (Phone) contact appears. If the other party is not saved in the Phonebook, the phone number and are displayed.



Received Calls list screen

lcon	Incoming Method
6 \$/ 6 \$	Voice Call/Voice Call (Missed Call)
61/61	Voice Call/Voice Call (Missed Call)
	*Additional Number 1 of "Multi Number" used
\$2/C2	Voice Call/Voice Call (Missed Call)
	*Additional Number 2 of "Multi Number" used
\$ \ \$	Video Call/Video Call (Missed Call)
(5)	Video Call/Video Call (Missed Call)
	*Additional Number 1 of "Multi Number" used
Sz/ Cz	Video Call/Video Call (Missed Call)
	*Additional Number 2 of "Multi Number" used
6-16	Data Communication/Data Communication
	(Missed Call)
$(]^1_{*}/(]^1_{-}$	Data Communication/Data Communication
	(Missed Call)
	*Additional Number 1 of "Multi Number" used
(² /(²	Data Communication/Data Communication
	(Missed Call)
	*Additional Number 2 of "Multi Number" used

2

1 Name and type icon saved in the Phonebook

If this is not saved in the Phonebook, and "Name unknown" are displayed. If the phone number is not sent from the network, "Private" is displayed.

- 2 The other party's phone number
- 3 Received date and time

Select a log \blacktriangleright (\bullet)

This does not appear for a missed call.

4 Call duration



detail screen

5 Phone number to which the incoming call arrived

If you subscribe to Multi Number. "基本契約番号 (Basic Number)"/"付加番号1 (Additional Number 1)"/ "付加番号2 (Additional Number 2)" is displayed according to the phone number dialed from to the caller(if the name has been changed using "Multi Number", the registered name is displayed).



The Phone number entry screen opens with the phone number entered.

0

To make a video call Press 🖫.

Note

- Operations of the function menu from the Received Calls list screen/Received Calls detail screen are the same as those from the Dialed Calls list screen/Dialed Calls detail screen. →P55
- Select a Received Calls entry, press 🚽 [Function], and select "Send SMS" to create and send an SMS message. →P206
- A video call or 64K data communication arriving during a voice call is rejected and is not recorded in the Received Calls/Missed calls.
- You can make a call also by selecting an entry on the Received Calls list screen and performing Step 3 and subsequent steps.
- The reason for no Caller ID is displayed in the history for a call without Caller ID. →P137
- The phone number appears in the call log made to the other party set the Phonebook entry to Secret if "Secret Data" is set to "Hide".
- When "Show in Call Logs" is set to "Off", a call that is hung up within the time set in "Ring Delay" is not saved in Received Calls.
- · When "Dialing Restriction" is set to "On", the call log will be deleted automatically. Calls received after the setting will be recorded in the history, however, you cannot make a call using the entry recorded in Received Calls.
- Received calls from parties using dial-in service may have a different number from the number actually dialed with.

Earpiece Volume

Adjusting the Earpiece Volume during a Call

Default 4

The Earpiece volume can be adjusted in 8 levels from 0 to 7.



Voice Call screen (P52) * //

- : Increase the volume.
- . Decrease the volume.

Note

- The adjusted Earpiece volume will be retained after the call.
- · Even if you set "Earpiece Volume" to "0", the other party's voice is heard. However, while talking using handsfree, the other party's voice is not heard from the Speaker (Your voice is sent to the other party).

Ring Volume

Adjusting the Ring Volume

Default

5

The ring volume can be adjusted in 8 levels from 0 to 7.

The default settings vary depending on the settings of "Profile".

The sound volume adjustment screen opens, and each press of h/h changes the volume.

- If no action is taken for approximately 2 seconds, the sound volume adjustment screen closes automatically and the volume is set.
- When the volume is set to "1", pressing , once sets "Vibrate" and pressing , twice sets "Silent".

Note

Not available when Manner Mode is activated.

Response Hold

Placing a Call on Hold When You Cannot Answer a Call Immediately

Incoming call screen (P63)

While a call is placed on response hold, the other party hears the hold tone set in "Voicecall Answer Hold Tone" under "Call Hold Setup". The hold tone and image set in "Videocall Answer Hold" in "Call Hold Setup" are sent to the caller when a call is put on video call answer hold.





6 >

when you can resume the call

Video calls

Press)/)/ Construction of the other party. Press is [Off Image] to send the image set in "Off Image"/Chara-den to the other party.

To terminate a call Press 🐨 😨 .

Note

- · The other party is charged even during a response hold.
- If a call has been answered with the FOMA handset closed when "Open to Answer" is set to "On", the response hold is not available.
- If you subscribe to the Voicemail service/Call Forwarding service, you can connect the incoming call to the Voicemail service center/forward the incoming call to the specified phone number. →P64, P84

Voicecall Answer Hold Tone

Setting the Response Hold Tone

You can set the response hold tone (guidance) sent to the caller during a voice call to Japanese/English. You can also record and set a hold tone.

Specifying a Response Hold Tone

Default Japanese

●) ♦ 🎶 (Settings) ♦ "In-Call Setup" ♦ "Call Hold Setup" "Voicecall Answer Hold Tone" the following operations



Voicecall Answer Hold Tone screen

Japanese

Set response hold tone to Japanese.

Enalish

Set response hold tone to English.

Personal

Set response hold tone to Recorded data.

Note

Personal

- · If Response Hold Tone has not been recorded, "Personal" is displayed as "[New]".
- If recorded data is deleted, the Response Hold Tone reverts to "Japanese".

Response Hold Tone

Response hold tone is played as follows:

Japanese

Voice guidance indicating that I cannot take your call now, so wait or call again later.

English

I can't take your call now. Please hold the line for a moment or call me back later. Thank you.

Recording Response Hold Tone

You can record up to 30 seconds of your own voice.

Voicecall Answer Hold Tone screen (P69) Select "[New]" > └─── [Record]

Start recording.

- (•) : Stop recording. The recorded data is available to be saved.
- Important [Pause] : Pause recording. Press Important [Resume] to restart the recording.
- Cancel] : Cancel recording and return to the Voicecall Answer Hold Tone screen.



Press (•) after the recording completes

The Voicecall Answer Hold Tone screen returns.

· When the recording is finished, "New" is changed to "Personal".

Continued on the next page ••• 69

- Note
- The following operations are available by pressing + [Function] when the recorded data is to be saved:
 - Select "Preview" to listen to the recorded data.
 - Select "Re-Record" to record data again.
 - Select "Discard" to remove the recorded data and return to the Voicecall Answer Hold Tone screen.

Function Menu on the Voicecall Answer Hold Tone Screen

Voicecall Answer Hold Tone screen (P69) Improve the provide the provided the provid Perform the following operations

Set as Default

Set the selected item as the response hold tone.

Plav

Play the selected item.

Rerecord

Record the data again.


IYes] Record for 30 seconds/ Area after the recording completes

Delete

Delete the recorded data.

Placing a Call on Hold

• This option is available only when you subscribe to the Call Waiting service.



The party on hold hears the call tone, "pululu", and busy tone, "poo", alternately.

7

When you can answer the call, $[+]/[Function] \Rightarrow$ "Resume"

To terminate a call Press 🐨 😨 .

Note

To operate during a video call →P83

Public Mode (Drive Mode)

Public Mode (Drive Mode)

Public Mode is an automatic response service to assist in observing manners in public locations. When Public Mode is activated, a voice guidance is played to the other party indicating that you are driving or at a place where you cannot talk (such as on a train, bus, or in a movie theater) and cannot answer the call, and the call is disconnected.

- You can set or cancel Public Mode only in Standby (and when 圈外 is displayed).
- This option is not available during data communication.

Public Mode (Drive Mode)

(for 1+ seconds)

When a call arrives, a voice guidance is played in Japanese saying that "The person you are calling is currently driving or in the area where cellphone should not be used. Please try again later.".

When Public Mode (Drive Mode) is set

Even when a call arrives to your handset, the ringtone does not sound. "X Missed Call" is displayed on the screen and the call is stored in Received Calls.

A voice guidance indicating that you are driving or you are at a location where you cannot use the handset is played to the caller, and the call is disconnected.

To cancel Public Mode (Drive Mode)

Press (for 1+ seconds) on the Wallpaper screen.

Note

- appears at the top of the screen when Public Mode is activated.
- Even when Public Mode is activated, you can make calls as usual.
- If a call with "Private ID" arrives when Caller ID Request service is set, the voice guidance of Caller ID Request is played (instead of Public Mode voice guidance).
- If Manner Mode is activated concurrently, Public Mode settings take precedence.
- Tones other than from operations (ringtones or alarms, etc.) do not sound when Public Mode (Drive Mode) is set.
- Even if mail arrives when the Public Mode is activated, incoming call actions such as sounding the ringtone, blinking
 the Illumination Indicator, or vibrating the FOMA handset will not take place. Also, even if a mail or a Message R/F
 arrives when the display is turned off, the backlight of the display will not be turned on.
- If the FOMA handset is closed when Public Mode is set, the Sub-display backlight does not light (If you press the Sidekey, it lights). And, if you open the FOMA handset, the Display backlight will light darker than usual.

Incoming Call Actions in a Network Service and Public Mode (Drive Mode)

Actions performed when Public Mode and a Network Service are set concurrently.

Service	Incoming Actions for a Voice Call	Incoming Actions for a Video Call
Voicemail service	After the Public Mode voice guidance is played, the call is connected to the Voicemail service center.*	The Public Mode image prompt does not appear, and the call is connected to the Voicemail service center.
Call Waiting service	After the Public Mode voice guidance is played, the call is disconnected.	After the Public Mode image prompt is shown, the call is disconnected.
Call Forwarding service	After the Public Mode voice guidance is played, the call is forwarded to the forwarding destination.* Whether the Public Mode voice guidance is played varies depending on the settings of Call Forwarding service voice guidance option.	The Public Mode image prompt does not appear, and the call is forwarded to the forwarding destination. If the forwarding destination cannot handle video calls, the call is disconnected.
Nuisance Call Barring service	If the caller is saved to reject a nuisance call, the reject call voice guidance is played and the call is disconnected. In a case other than the above, the Public Mode voice guidance is played and the call is disconnected.	If the caller is saved to reject a nuisance call, the reject call image prompt is displayed and the call is disconnected. In a case other than the above, the Public Mode image prompt is shown and the call is disconnected.

Service	Incoming Actions for a Voice Call	Incoming Actions for a Video Call
Caller ID Request service	If the caller does not send the Caller ID, the voice guidance of Caller ID Request is played and the call is disconnected. If the caller sends the Caller ID, the Public Mode voice guidance is played and the call is disconnected.	If the caller does not send the Caller ID, the image prompt of Caller ID Request is displayed and the call is disconnected. If the caller sends the Caller ID, the Public Mode image prompt is shown and the call is disconnected.

*: If the ringing duration for the Network Service is set to 0 (zero) seconds, the Public Mode voice guidance is not played, and the call is not recorded in Received Calls.

Public Mode (Power Off)

Public Mode (Power Off)

Public Mode (Power Off) is an automatic response service to assist with observing manners in public locations. When Public Mode (Power Off) is set, when a call arrives while the power is turned off, a voice guidance is played to the other party indicating that you are at a place where the handset must be turned off (such as in hospitals, in aircraft, or near priority seats on a train) and cannot answer the call, and the call is disconnected.

Enter "*25251" 🌢 🐼

Public Mode (Power Off) is activated (the Wallpaper screen opens the same). After Public Mode (Power Off) is set, when a call arrives while the power is turned off, a voice guidance is played saying that "The person you are calling is currently in the area where use is prohibited. Please try again later.".

After activating Public Mode (Power Off)

Public Mode (Power Off) is activated until it is cancelled by dialing "*25250". Turning the power On does not deactivate the mode.

The Public Mode (Power Off) voice guidance is played even when you are out of the service area or in the poor radio wave reception level. A voice guidance indicating that you are at a location where you must turn the handset off is played to the other party, and the call is disconnected.

To cancel Public Mode (Power Off) Enter "*25250" and press ().

To check the status of Public Mode (Power Off) Enter "*25259" and press ().

Incoming Call Actions in a Network Service and Public Mode (Power Off)

Actions performed when Public Mode and a Network Service are set concurrently.

Service	Incoming Actions for a Voice Call	Incoming Actions for a Video Call
Voicemail service	After the Public Mode (Power Off) voice guidance is played, the call is connected to the Voicemail service center.*	The Public Mode (Power Off) voice guidance is not played, and the call is connected to the Voicemail service center.
Call Forwarding service	After the Public Mode (Power Off) voice guidance is played, the call is connected to the forwarding destination.* Whether the Public Mode voice guidance is played is according to the settings of Call Forwarding service voice guidance option.	The Public Mode (Power Off) image prompt does not appear, and the call is forwarded to the forwarding destination. If the forwarding destination cannot handle video calls, the call is disconnected.

Service	Incoming Actions for a Voice Call	Incoming Actions for a Video Call
Nuisance Call Barring service	If the caller is saved to reject a nuisance call, the reject call voice guidance is played and the call is disconnected. In a case other than the above, the Public Mode (Power Off) voice guidance is played and the call is disconnected.	If the caller is saved to reject a nuisance call, the reject call image prompt is displayed and the call is disconnected. In a case other than the above, the Public Mode (Power Off) image prompt is shown and the call is disconnected.
Caller ID Display Request service	If the caller does not send the Caller ID, the voice guidance of Caller ID Request is played and the call is disconnected. If the caller sends the Caller ID, the Public Mode (Power Off) voice guidance is played and the call is disconnected.	If the caller does not send the Caller ID, the image prompt of Caller ID Request is displayed and the call is disconnected. If the caller sends the Caller ID, the Public Mode (Power Off) image prompt is shown and the call is disconnected.

*: If the ringing duration for the Network Service is set to 0 (zero) seconds, the Public Mode (Power Off) voice guidance is not played.

Missed Call

Checking Missed Calls

If you could not answer a call, the Missed call notification screen opens on the Wallpaper screen. From the Missed call notification screen, you can check the other party.

An incoming call terminates

The number of missed calls is displayed.

• [Exit]: Close the Missed call notification screen.

сh ∫[View]

The Received Calls list screen opens.

• [Exit] : Close the Received Calls list screen.

Select a missed call entry \blacktriangleright (•)

The Received Calls detail screen opens.

Note

- After checking the missed call, the notification screen will not open.
- · When "Show in Call Logs" is set to "Off", the Missed call notification screen for a call that is hung up within the time set in "Ring Delay" is not displayed.

Record Message

Recording of Voice/Video-clip Message from a Caller When You Cannot Answer a Call

Even if you do not subscribe to the Voicemail service, a response message indicating that you cannot answer the voice/video call can be played, and your handset can record the voice/video message.

The following table describes the differences between Record Message and the Voicemail service:

1 Missed Call

Missed call notification screen

Item	Record Message	Voicemail Service
Recording time	Up to 60 seconds per message (Voice Call)/Up to 30 Seconds (Video Call)	Up to 3 minutes per message
Storage Location	FOMA handset	Voicemail service center
Number of Messages to be stored	Up to approx. 1196 messages (Voice call)/approx. 574 messages (Video call)*	Up to 20 messages
Stored Period	None	Up to 72 hours
Conditions to playback	None	Within the service area
Conditions to record a message	 In the network service area (available only when the handset power is turned on) When "Record Message" is set to "On" 	 In the network service area (available even when the handset power is turned off) When the Voicemail service is activated

*: The values are when only voice call/video call messages are recorded, and one message is 30 seconds long.

Setting the Record Message

Record Message: Off Response Time: 8Sec Record Time: 30Sec Default Response Greeting: English Response Image: English

🗩 🌢 🚮 (Accessories) 🕈 "Record Message" 🕈 🔙

[Function] "Settings"

Settings Record Message: Off Response Time: 8Sec Record Time: 30Sec Response Greeting: En… Response Image: Engli.

Settings screen

Perform the following operations **Record Message** Activate/deactivate the Record Message. "On"/"Off" **Response Time** Set the duration of time from when the call arrives until Record Message starts. Enter between 0 - 120 seconds. Use ()/Dial Keys to enter the time **Record Time** Set the recording time for the Record Message for the voice call. Select a recording time . [Select] **Response Greeting** Japanese: Set message language to Japanese. English : Set message language to English. Personal : Set message to Recorded data. **Response Image** Japanese: Set Response image to Japanese of the voice call. English : Set Response image to English.

Note

- Eq. (Blue) appears at the top of the screen when the Record Message is activated. However, the icons are not displayed when:
 - "Secret Data" is set to "Show"
 - A message is recorded in Voicemail service

Response Time

- If the set Response time is longer than the set ringing time for Voicemail service/Call Forwarding service, the settings of the ringing time for the Voicemail service/Call Forwarding service take precedence.
- If this is set to the same duration as "Auto Answer", "Auto Answer" takes precedence.
- If the Response time is set shorter than the set "Ring Delay", Record Message starts without the ringing action.

Record Time

- On the View Settings screen. "Audio length : XX sec" shows the available message length for a voice call message and "Video length : 30 sec" shows the length for a video call message.
- Only the record time for sound can be set. The record time for video (30 seconds) cannot be changed.

Response Greeting

- If the Response Greeting has not been recorded, "Personal" is displayed as "New".
- · If recorded data is deleted, the Response Greeting reverts to "Japanese".

Response Image

- Only a pre-installed image for Record Message can be saved.
- The following operations can be performed by pressing
 [Function] on the Response image list:
 - Select "Set as Default" to set the selected item as the Response image.
 - Select "Preview" to view the selected response image.

Response Greeting

Recording a Response Greeting

You can record up to 1 minute of your own voice.

Settings screen (P74) "Response Greeting"



Greeting List screen

"[New]"

Recording starts.

- (•) : Stop recording. The recorded data is available to be saved.
- Important press Important [Resume] to restart the recording.
- Time [Cancel] : Cancel recording and return to the Greeting List screen.

after the recording completes (•

The Greeting List screen returns.

· After recording completes, "New" is changed to "Personal".

Note

- The following operations are available by pressing 4 [Function] when the recorded data is to be saved:
 - Select "Preview" to check the recorded data.
 - Select "Re-Record" to record data again.
 - Select "Discard" to remove the recorded data and return to the Greeting List screen.

Greeting List screen (P75) . [Function] Perform the following operations

Set as Default

Set the selected item as the Response Greeting.

Play

Play the selected Response Greeting.

Edit

Record the recorded greeting again.

Record for 1 minute/

Delete

Delete the recorded greeting.

[Yes]

When Record Message is Activated

The other party's voice is recorded for a voice call, and the other party's voice and image are recorded for a video call.

A call arrives the Greeting message is played

The Greeting message is played after the set response time elapses. The Greeting image is also sent for a video call.

- [Answer]: Stop the Greeting message and answer the call. The alternate image is sent for a video call.
- Isconnect: Disconnect the call.

7 Recording starts

- [Answer]: Stop recording and answer the call. The alternate image is sent for a video call.
- Isconnect]: Disconnect the call.

Recording completes

- [Play]: Play the Record Message.
- [Exit]: Close the New Message notification screen.
- If multiple messages/video clips are recorded in the Record Message The number of recordings is displayed on the New Message notification screen. Press [] [View] to display the recorded message list screen.

Note

- When a message is recorded in Record Message, 🔄 appears at the top of the screen. However, this icons are not displayed when:
 - The "Secret Data" is set to "Show"
 - A message is recorded at the Voicemail service center
- · The number of messages that can be recorded varies depending on the available memory space. You can check the available memory space for Record Message. →P78
- The Record Message cannot be recorded when 闇舟 is displayed, the handset power is turned off, or Public Mode (Drive Mode) is set.



Greeting playback
screen



Message screen



New Message notification screen

- If read (Red) appears at the top of the screen, the recording is not available because the memory space for Record Message has become scarce. This icon also appears when large amount of memory space is used by Message R/ F, Deco-mail templates, Mail, i-appli the Databox (Image, Video/i-motion, Melody, Chara-den, Animation, Voice Note) or downloaded dictionary so delete unnecessary data as needed. →P76, P173, P189, P199, P199, P200, P213, P228, P232, P234, P240, P242, P247, P303
- If a call arrives when the Response Greeting is being played or when a message is being recorded, the call is rejected and not recorded in Received Calls/Missed Calls.
- Press vertex and the Greeting playback screen or Recording message screen to answer a call. The Camera Image is sent for a video call.
- If register is pressed on the Recording message screen, the message will not be saved.

Quick Record Message

When Record Message is not started, you can activate it manually. To starts Record Message, press 🗟 (for 1+ seconds) while the incoming screen is displayed.

Notice

It is recommended that you write down messages from the Record Message and store them in a separate location. DoCoMo is not responsible for lost recorded messages due to failure or repair of the FOMA handset.

Playing/Deleting Record Message

Playing Record Message

•

🕨 🌇 (Accessories) 🕨 "Record Message"

· The other party's name appears if a caller saved in the Phonebook recorded a message.

Icons on the recorded message list screen

Icon	Description
•==• / •==•	Unchecked Voice Call/Video Call message
/	Checked Voice Call/Video Call message
·····	Protected Voice Call/Video Call message



Select a recorded message $\blacklozenge(\bullet)$

The message is played.

- (●)/(^{(J}): Pause the message. Pressing it again resumes the playback.
- ()/(): Hold it down during the playback to rewind/fast forward. Press it during a pause to resume the playback.
- O: Stop the playback.
- [Return]: Return to the recorded message list screen.

Note

- The following operations can be performed by pressing 上 [Function] on the Recorded message playback screen:
 - Select "Play" to play a message.
 - Select "File Details" to check the date and time.
 - Select "Exit" to return to the recorded message list screen.

Recorded message list screen (P77) . [Function] Perform the following operations

Play

Play the selected message recorded in the Record Message.

Call

Make a call to the phone number of the selected message recorded in the Record Message.

♦ (0)/(1)

Add to Ph Book

Store a phone number in a Contact if the selected/displayed phone number of the recorded message is unregistered. Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97).

Delete

Delete the selected message recorded in the Record Message.

Delete All

Delete all messages recorded in the Record Message.

Lock · Unlock

Protect/Unprotect a message recorded in the Record Message.

Settings

Set the Record Message. Go to Step 2 (P74) in "Setting the Record Message".

View Free Space

Check the available space, used space and total space for Record Message.

Note Delete

· This option is not available when a protected message is selected.

Delete All

· Protected messages cannot be deleted.

Making/Answering Video Calls

Video Calls	80
Making a Video Call	80
Receiving a Video Call	83
Chara-den	85
Setting the Image to Send to the Other Party	86
Setting Handsfree for Video Calls <speakerphone></speakerphone>	87
Setting a Displayed Image during a Video Call	87
Setting the Answer Hold Tone and Image <videocall answer="" hold=""></videocall>	89
Setting a Video Call Hold Tone and Image <videocall hold=""></videocall>	90
Changing the Video Call Settings <videocall settings=""></videocall>	90

Video Calls

Video calls are available between DoCoMo video-phones.

- DoCoMo video-phones comply with "3G-324M*1, an international standard developed by 3GPP*2". The handset cannot connect to a video phone that uses a different system from DoCoMo video-phones.
- *1:3G-324M
 - This is an international standard for mobile video-phones of the third generation.
- *2: 3GPP (3rd Generation Partnership Project) This is a regional standards organization for developing common technical specifications for the third generation mobile communications system (IMT-2000).
- There are 2 communication speeds for video calls: 64K (64Kbps) and 32K (32Kbps). However, 32K video calls are not supported on this FOMA handset.
- This FOMA handset does not handle a remote monitoring function.
- This FOMA handset cannot be connected to an external device to use video calls.

Components of Video Call Screen

- Main window
- 2 Sub window
- S The other party's phone number/name
- Gommunication/Settings/Call time status

Operation icon

- \mathbb{P}/\mathbb{B} : Switch between the camera image and alternate image \rightarrow P86
- \mathbb{R} / \mathbb{Z} : Place the call on hold or resume the active call \rightarrow P83
- ≪/ ※ : Set/Cancel the Handsfree call → P83
- . Switch between the In and Out Cameras →P86
- $\frac{1}{2}$ / $\frac{1}{2}$: Show/Hide icons displayed at the top of the screen →P87
- $\boxed{2}$: Switch between the Full Action Mode and Partial Action Mode of the Chara-den →P86

Making a Video Call


Enter a	phone	number
---------	-------	--------

- The function menu on the Phone number entry screen →P52
- Start from the city code even for an inside the city call.
- To make a call to a fixed line phone

Area Code - City Code - Phone Number

- To make a call to a mobile phone 090-XXXX-XXX/080-XXXX-XXXX
- To make a call to a PHS 070-XXXX-XXXX





Making/Answering Video Calls

YXXXXXXX

* 🗐 🔐

Connected 00:00:22

Video call screen

0

Connecting.

* 📑 🔐

Connectina

screen



A/a

A call tone is heard from the Earpiece, and the dialing screen with the message "Video Calling..." appears till the other party answers.

- Digital communication charges apply from the time the Connecting screen opens.
- (): Enlarge or shrink the camera image.
- 01 to 59: Send touch-tone signals (DTMF).

to terminate the call

Note

- Folding the FOMA handset during a call terminates the call. However, when using the miniUSB Stereo Headset M01 (optional), etc., the call will not be terminated when the handset is closed. (The alternate image/Chara-den is sent to the other party according to the settings of "Alternate Image")
- If an image requesting the Caller ID is shown, make the video call again sending the Caller ID.
- International video calls are available using "WORLD CALL", DoCoMo's international telephone service. →P58
- The connection cannot be established if the call is made to a non video-phone or even if the other party has a video-phone, when the handset is turned off or outside of the service area. If you made a call to a non video-phone, the call is cancelled and a confirmation screen whether to call again opens. Select "Reconnect as Voice Call" to call again as a voice call. However, this may not occur if the destination is ISDN synchronous 64K or PIAFS, ISDN video-phone not supporting 3G-324M (as of November, 2006), or wrong number was dialed. Communication charges may apply.
- If an emergency call such as 110, 119 or 118 was made from the FOMA handset via video call and the other party
 does not have a video call handset, a message indicating the connection is unable appears and the call cannot be
 made. In this case, make a voice call selecting "Reconnect as Voice Call".
- i-mode mail or Message R/F arriving during a video call is stored at the i-mode Center. SMS can be received even during a video call.
- · Digital communication charges apply even if you send the alternate image.
- If the handset is not set to "DTMF ON", touch-tone signals cannot be sent by pressing the Dial Key during a Charaden video call. →P82
- · You cannot switch to a voice call during a video call using this FOMA handset.
- If a charge starts during a call, the charge start tone sounds from the Earpiece. During a handsfree call, the charge start tone sounds from the Speaker.
- When the battery level becomes low during a call, the low battery alert, "pico", sounds from the Earpiece every 30 seconds. You can keep talking, however, the call will be terminated momentarily when the handset power is automatically turned off.

When video calls are not connected

The following error messages indicate the reason:

The message displayed may not accurately describe the actual situation depending on the other party's handset
 or subscription to Network Services.

Error Message	Reason
Video Call Failed	The dialed phone number is no longer in use.
Check number, then redial.	
Number Busy	The line is busy or using packet communication. Select "Reconnect as Voice Call" to switch to a voice call.
Video Call Failed	The other party is in the poor radio wave reception level.
Out of Service Area/Power Off.	
Video Call Failed	Appears for the reason other than the above. • Select "Reconnect as Voice Call" to redial as a voice call.

Connecting screen (P81)/Video call screen (P81) ♦ [Function] ♦ Perform the following operations

Swap

Use the multitask function. →P258

Off Image/Camera On

Switch the image to send between camera image and alternate image.

Call Hold

Place the call on hold the active call.

Speaker Off/Speaker On

Make/cancel a Handsfree call. The other party's voice comes from the Speaker during a handsfree call.

Swap View

Switch between Main and Sub windows.

External View/Internal View

Switch the camera image between Out and In Cameras.

Status Icons Off/Status Icons On

Set Show/Hide of the display of operation icons displayed on the top of the Video call screen.

Setup

Mirror : Set or cancel the mirror image of the camera image. →P88 Lighting Conditions : Adjust the color tone according to the light source of the capturing location. →P88

Brightness

Adjust the brightness of the screen during a call. →P88

My Tel. Number

Display your phone number.

Bluetooth · Handset

The call will be switched to a connecting Bluetooth device/FOMA handset.

Dialed Calls

Display Dialed Calls.

Received Calls

Display Received Calls.

DTMF On/DTMF Off

Allow/Prohibit touch-tone signals to be sent during a video call using Chara-den.

Action List

Open the Action list screen during a video call using Chara-den to select an action and operate the character. →P239

Select an action Select]

Change Action

Switch between Full action mode/Partial action mode during a video call using Chara-den. →P239

Note

Off Image

The alternate image sent to the other party is either an image/Chara-den according to the settings in "Off Image".

Call Hold

During hold, press
 / (#) to send a camera image or press
 [Alternate Image] to send the alternate image after canceling the hold.

Placing a Call on Hold

You can place the call on hold or resume the active call using an operation icon.

Video call screen (P81) ♦ Use ↔ to select 🝙 ♦

While the call is placed on hold, the hold tone and image set in "Videocall Hold" under "Call Hold Setup" are sent to the other party.

• Press ()/) to send the Camera Image to the other party after canceling the hold. To send the alternate image after canceling the hold, press to select and press in [Off Image].

Note

• You can place a video call on hold also by pressing a video call.

Switching to a Handsfree Call

You can set to hear the other party's voice from the Speaker using an operation icon.

Video call screen (P81) ♦ Use ↔ to select 🌋 ♦ ፲ [Speaker On]

To cancel the handsfree function, press
 ^O to select
 and press

 [Speaker Off].



090XXXXXXXXXX Connected 00:00:22

1 1 1 1 1 1 1 1

Video call screen

(During call hold)

Video call screen (During a handsfree call)

Note

- The handset is configured to use handsfree when a video call is connected by default. You can change the setting in "SpeakerPhone" in "Videocall Settings".
- While talking using handsfree, it is recommended that you talk holding the FOMA handset within 50 cm from your mouth.
- If you set "Earpiece Volume" to "0", the other party's voice is not heard from the Speaker (Your voice is sent to the other party).

Receiving a Video Call



A call arrives

The ringtone sounds.

- • /.: Stop the ringtone or vibration.
- I Hold the incoming call. →P68



Incoming Video Call screen



Answer the call.

To answer the call with sending the alternate image to the caller

Press [is [Use Image]. An image/Chara-den is sent to the other party according to the settings in "Alternate Image".



ະວ່ to terminate the call

Note

- When "Ring Lights" is set to other than "None", the illumination indicator flashes for incoming calls or Email.
- When Record Message is activated, the caller's video message can be recorded. →P73
- · The incoming call actions such as a ringtone or vibration vary depending on the settings in "Profile" or the settings saved in the Phonebook. →P93, P112, P115
- When Manner Mode is activated, the ringtone does not sound. When Public Mode (Drive Mode) is set, the ringtone does not sound and the Illumination Indicator does not blink.
- When "Open To Answer" is set to "On", you can answer a video call by opening the handset.
- Folding the FOMA handset during a call terminates the call. However, when using the miniUSB Stereo Headset M01 (optional) etc., the call will not be terminated when the handset is closed. (The alternate image or Chara-den is sent to the other party according to the settings of "Alternate Image")
- You can set to delay the incoming call actions for a call made from the other party not saved in the Phonebook in "Ring Delay".
- When the Voicemail service is activated, SMS notifies you of a new message.
- · Even if the Call Forwarding service is activated, an incoming video call is not forwarded if the forwarding destination is not a video-phone device supporting 3G-324M. Check the forwarding destination device before setting the Call Forwarding.
- · i-mode mail or Message R/F arriving during a video call is stored at the i-mode Center. SMS can be received even during a video call.
- When the Public Mode (Drive Mode) is activated, incoming call actions such as sounding the ringtone or blinking the Illumination Indicator will not take place. Also, even if a call arrives when the display is turned off, the display will not be turned on
- · You cannot receive 32K video calls and they are not recorded in Received Calls.
- If a charge starts during a call, the charge start tone sounds from the Earpiece. During a handsfree call, the charge start tone sounds from the Speaker.
- You cannot switch to a voice call during a video call using this FOMA handset.

Function Menu on the Incoming Video Call Screen

the following operations

Answer

Receive a video call.

Ignore

Rejects an incoming call and hang up.

Videocall Answer Hold

Place the call on hold.

Call Forward

Transfer a video call to the specified number.

Note

Answer Hold


• Tone and Image set in "Videocall Answer Hold" under "Call Hold Setup" in settings is sent to the caller.

Call Forward

 This option is not available unless you subscribe to the Call Forwarding service and you specify a forwarding destination.

Chara-den

You can send a character of Chara-den instead of camera image to the other party. The movement of the character can be controlled using keys.

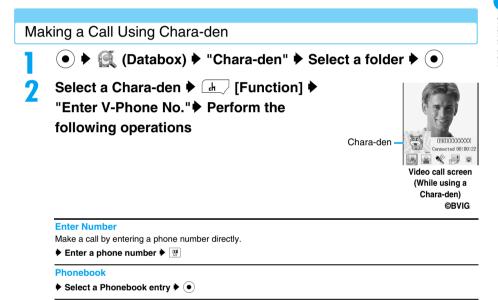

Received Calls

Select a phone number from a Received Calls entry.

Select a Received Calls entry

Dialed Calls

Select a phone number from a Dialed Calls entry.

Select a Dialed Calls entry

Answering a Call Using Chara-den

• Set "Alternate Image" to "Chara-den" in advance.



IUse Image] when a call arrives

The call is connected and the Chara-den character is sent to the other party.

- Note
- When selecting a phone number from a Phonebook entry, if the selected entry has multiple phone number, use for • to display the phone number to dial and press (•).
- Press 📥 [Function] during a video call to select "Action List" to open the action list screen. Select an action and
- During a video call, press 📥 [Function] and select "Change Action", or use 😔 to select 😰 and press 💽 [Partial Action]/ [Full Action] to switch between Full action mode and Partial action mode.
- For operations on the Action list screen or Chara-den, or details of Action modes, see "Chara-den" (P239).
- When "DTMF On" is set, Chara-den cannot be controlled by pressing the Dial Keys.

Setting the Image to Send to the Other Party

Switching between Camera Image and Alternate Image

Video call screen (P81) 🕨 Use 😔 to select 🕋 🕨 🧊 [Off Image]

The alternate image is sent to the other party.

and press 🚂 [Camera On].



Video call screen (While sending camera image)



Video call screen (While sending alternative image)

Note

Note

- You can also press do switch between camera image and alternate image.
- The alternate image or Chara-den is sent to the other party according to the settings of "Alternate Image".

Switching between the In and Out Cameras

This function is available only when the camera image is being sent to the other party.

Video call screen (P81) Þ Use 😔 to select
(Camera) ♦
(Ext. View]

The Out Camera image is sent to the other party.

· Changed settings will not be retained after the call.

• To switch to the In Camera, press is to select and press 🚂 [Int. View].



Video call screen (While using the In Camera)



Video call screen (While using the Out Camera)

SpeakerPhone

Setting Handsfree for Video Calls

Default On

You can set whether the other party's voice to come from the Speaker using Handsfree or from the Earpiece when a video call is connected.



Setting a Displayed Image during a Video Call

Switching between Main and Sub windows Default Main window: Other party's image Sub window: Your image Video call screen (P81) 🕨 Use 😔 to select 🚚 🕨 🧵 [Swap View] The other party's image is displayed on the sub window and your image on the main window. 90XXXXXXXX IN CXXXXXX Connecting.... Connecting... · To restore the default main window display, press 火 📑 🔐 r 🔹 帐 🗐 🚇 ↔ to select 🐖 and press 🗔 [Swap View]. Video call screen Video call screen (main window: the (main window: your other party, sub image, sub window: window: your image) the other party)

Note

· Changed settings will not be retained after the call.

Showing/Hiding Icons at the Top of the Screen

Default Status On

- This function is available only during response hold, a call on hold or sending an image using the alternate image.
 - Response Hold screen (P68)/During call hold screen (P83)/While sending alternate image (P86) ♦ Use ↔ to select 👑 ♦ 📧 [Status Off]

Icons at the top of the screen will be hidden.

To show icons, press ↔ to select 👑 and press 🗔 [Status On].

Note

Changed settings will not be retained after the call.

Changing the Camera Image to a Mirror Image

Default Off

When setting to "On", the image is displayed with the right and left inverse (Mirror On), and the image to be sent to the other party is also displayed with the right and left inverse (Mirror On).



Video call screen (P81) 🕨 👍 [Function] • "Setup" • "Mirror" ♥ "Off"/"On" ♦ [in [Return]



Video call screen (Mirror On)



Video call screen (Mirror Off)

Setting the Lighting Conditions

Default Automatic

You can adjust images to natural color tones according to the light source of the capturing location.

Video call screen (P81) <a>[Function] "Setup" "Lighting Conditions" Perform the following operations

Automatic

Adjust automatically.

Sunny

Suitable for outdoors in fine weather.

Cloudy

Suitable for outdoors in cloudy weather.

Indoor (Home)

Suitable for indoors under incandescent lighting.

Indoor (Office)

Suitable for indoors under florescent lighting.

Night

Suitable for night.

7 ≝∝ [Return]

Adjusting the Brightness of the Screen

Default 3

The brightness can be adjusted to 7 levels from 0 to 6.

Video call screen (P81) • 🖅 [Function] • "Brightness"

The Brightness adjustment screen opens.

Use ()/Dial Keys to adjust the brightness

 If no action is taken for approximately 2 seconds, the Brightness adjustment screen closes automatically and the brightness is set.

Note

· Changed settings will not be retained after the call.

Videocall Answer Hold

Setting the Answer Hold Tone and Image

Answer Hold Tone: Japanese Answer Hold Image: ah img Default

You can set Answer Hold Tone that the other party on hold hears and the images to display.



Answer Hold Tone

Japanese: Set answer hold tone to Japanese.

English : Set answer hold tone to English.

Answer Hold Image

Select an image

Note

Answer Hold Image

Only a pre-installed image for response hold/call on hold can be saved.

Answer Hold Tone

The answer hold tone is played as follows:

Japanese

ただいま電話に出ることができません。そのままお待ちになるか、しばらく経ってからおかけ直しください。 English

I can't take your call now. Please hold the line for a moment or call back later. Thank you.

Setting a Video Call Hold Tone and Image

Default Videocall Hold Tone: Melody1 Videocall Hold Image: ch_img

You can set Videocall Hold Tone and images that is displayed on your handset and other party's handset while a call is on hold.

Image: Settings Image: Imag "Videocall Hold" > Perform the following operations

Videocall Hold Tone

"Melody1"/"Melody2"

Videocall Hold Image

Note

Videocall Hold Image

Only a pre-installed image for response hold/call on hold can be saved.

Videocall Settings

Changing the Video Call Settings

Setting Alternate Image/Chara-den

Default bunbun (Dimo)

You can select and set an image or Chara-den as the image to be sent to the other party when switching to the Alternate Image.

🕨 🔶 🌃 (Settings) 🕈 "In-Call Setup" 🕨 "Videocall Settings" 🕨 "Alternate Image" Perform the following operations

My Pictures

Select from images saved in "My Pictures".

Select a folder

Chara-den

Select from images saved in "Chara-den".

Select a folder

Note

· The set image or Chara-den is displayed as its file name.

My Pictures

- · Only JPEG formatted image files can be set.
- · Images restricted from redistribution cannot be set.

Phonebook

Saving in the FOMA Handset (Phone) Contacts Saving in the UIM Contacts Saving Contacts to the Phonebook from Received Calls or Dialed Calls Saving/Editing a Category Name	92
Saving Contacts to the Phonebook from Received Calls or Dialed Calls Saving/Editing a Category Name	93
Saving/Editing a Category Name	95
	97
	98
Making a Call from the Phonebook	
<search by="" filter="" no.="" speed=""></search>	100
Viewing a Phonebook Entry	102
Deleting Contacts	107
Setting Details of the Phonebook <setup></setup>	108
Checking the Phonebook Capacity and Utilization	
<phone capacity="" uim=""></phone>	109
Making a Call Using Speed Dial	109

Phonebooks Available on the FOMA Handset

There are 2 Phonebooks: the FOMA handset (Phone) contacts and the UIM contacts. The following can be saved/set for each Contact:

• Only 1 per entry.

Item		Item	FOMA handset (Phone) contact	UIM contact
Number of Entries		er of Entries	Approx. 700*1	Up to 50
	Name/Reading		1 per entry	1 per entry
	Nickname		1 per entry	Not available
	Phone number		Up to 7 numbers	Only 1 number
Savable Item		Туре	Select from 9 types	Not Available
		Video Number	Available	Not Available
	Email		Up to 3 addresses	Only 1 address
		Туре	Select from 5 types	Not Available
	URL		Up to 2 URLs	Not available
	Ad	dress	Up to 2	Not available
		Туре	Select from 3 types	Not Available
	Category		Select from 10 types*2	Select from 11 types*2
	Picture ID		1 available	Not available
	Ringer ID		1 available	Not available
	Chara-den		1 available	Not available
	Birthday		1 available	Not available
	Secret		Available	Not available
	Reject		Available	Not available
	Notes		1 available	Not available
Sp	eed	Dial	Available	Not available

*1: This is an approximate number of entries when both Phonebooks save up to the maximum number of option items. The available number of entries (up to 2000 entries) to be saved varies depending on the contents.

*2: By default, 4 types of category are saved on the FOMA handset (Phone) contact, and 1 type of category is saved on the UIM contact. Additionally, up to 10 types can be registered in the FOMA handset Phonebook, and up to 11 types can be registered in the UIM Phonebook. →P98

Note

• You can use the Phonebook data on your UIM inserted into another FOMA handset.

Notice

- It is recommended that you write down the contents of the Phonebooks and store it in a separate location. You can connect the handset to a PC using Data Link Software and a FOMA USB Cable (optional) and save Phonebook entries to the PC.
- Note that the service counter such as DoCoMo shop may not be able to copy data from your existing FOMA handset to the new one, depending on the specifications.
- DoCoMo is not responsible for lost data due to failure or repair of the FOMA handset.

Saving in the FOMA Handset (Phone) Contacts

- P "[New Entry]"
- When "Default Storage" is set to "UIM Card", select "Store to"
 "Phone" before operating.

Create Contact			
Name:			
Nicknam	e:		
Number:			
Type:	General Ph_ 🖀		
Video	Number: <u>No</u>		
Email:			
Type:	Mobile Pho. 🖭		
-	-		

Create Contact screen

```
2
```

Perform the following operations

Name

Enter using Kanji, Hiragana, Pictograph (E-Moji), symbol, alphanumeric or Katakana. Up to 16 full-pitch or 32 half-pitch characters can be entered.

Enter a name

Reading

Enter/edit when necessary. Enter using Katakana, alphanumeric or symbol. Up to 32 half-pitch characters can be entered.

Enter a Reading

Nickname

Enter using Kanji, Hiragana, Pictograph (E-Moji), symbol, alphanumeric or Katakana. Up to 32 full-pitch/halfpitch characters can be entered.

Enter a Nickname

Number

Up to 26 digits can be entered.

Enter a phone number

Number Type

Set a type for the phone number.

Select a type . [Select]

Video Number

Set whether the entered phone number is for a video-phone.

"Yes"/"No"

Email

Enter using alphanumeric or symbol. Up to 50 half-pitch characters can be entered.

Enter a mail address

Email Type

Set a type of a mail address.

Select a type < _ [Select]</p>

Store To

Specify the saving destination. In this example, select "Phone".

"Phone"/"UIM"

URL

Enter URL using alphanumeric or symbol. Up to 128 half-pitch characters can be entered.

Enter a URL

Postal Address

Enter "Zip Code", "State", "City", "Street 2", "Street 1" and "Country". Enter alphanumeric characters (half-pitch only) or symbols (half-pitch only) for "Zip Code". Enter others using Kanji, Hiragana, Pictograph (E-Moji), symbol, alphanumeric or Katakana. Up to 32 half-pitch digits can be entered for a Zip Code and up to 62 full-pitch/halfpitch digits can be entered for "Street 2" and "Street 1". Up to 32 full-pitch/half-pitch digits can be entered for other items.

Select item to enter <a>(•) Enter Address, etc. <a>[Complete]

Address Type

Set a type for the address.

Select a type < ___ [Select]</p>

Category

Select a category

Picture ID

Save an image or a video/i-motion to be displayed on the Incoming call screen for a call from this other party.

My Pictures	 s: Select from images saved in the "My Pictures" folder. ♦ Select a folder ♦ ● ♥ Select an image ♦ ●
i-motion	 Select from videos/i-motion movies saved in the "i-motion" folder. ♦ Select the folder ♦ ● ♥ Select a video/i-motion movie ♥ ●
None	: An image or video/i-motion does not be displayed.

Ringer ID

Specify a ringtone/vibration pattern for a call from this other party.

 Select from videos/i-motion movies saved in the "i-motion" folder. ♦ Select the folder ♦ ● ♦ Select a video/i-motion movie ♦ ●
 Select from melodies saved in the "Melody" folder. ♦ Select a folder ♦ ● ♦ Select a melody ♦ ●
 Select from Voice Notes saved in the "Voice Notes" folder.
n : Select from 5 types of vibration patterns. →P116 ◆ Select a vibration pattern ♦
: Set the handset to not sound the ringtone/to not vibrate.
: A ringtone sounds in accord with the setting of "Profile".

Chara-den

Specify a Chara-den to be displayed as an alternate image during a video call to this party.

Chara-den : Select from Chara-den images saved in the "Chara-den" folder.

- Select a folder < </p>
- None : A Chara-den is displayed in accord with the setting in "Alternate Image".

Birthday

Secret

Set an entry to secret and set "Secret Data" to "Hide" not to display the entry.

"Yes"/"No"

Reject Calls

Reject an incoming call from the saved phone number.

"Yes"/"No"

Notes

Enter using Kanji, Hiragana, Pictograph (E-Moji), symbol, alphanumeric or Katakana. Up to 128 full-pitch/halfpitch characters can be entered.

Enter a note

Note

- Use the function menu to add a phone number, Email address, URL or postal address field. →P96
- You cannot save an entry to the Phonebook unless the name and at least one of the following items are entered: phone number, Email address, URL, or postal address.
- If a call arrives while saving an entry, the data being registered will not be saved if the following is performed:
 Answer the call
 Place the call on answer hold
 Record Message started
- If text with an embedded line feed is saved to the Phonebook, the text after the line feed may not be available after the entry has been sent via Infrared or Bluetooth.

Number

- The following operations can be performed by pressing $\boxed{}{}$ [Function] on the Phone number entry screen:
 - Select "Insert" ▶ "Pause"/"Wait"/"n" in the order enters "p"/"w"/"n" after the entered phone number. →P57
 - Select "Editing Function" to edit the characters. →P298
 - Select "Browse"
 "Received Calls"/"Dialed Calls"/"Phonebook" to select and enter a number from Dialed/Received Calls or Phonebook.
 - Select "Cancel Entry" to cancel the entry.

Video Number

 Setting this option to "Yes" adds (IR to video phone numbers on the Phonebook list screen or the Phonebook entry detail screen.

Email address

- An Email address without "@" cannot be saved.
- If the mail address has a Secret Code (P181) registered, enter "phone number + Secret Code@docomo.ne.jp" or enter "phone number@docomo.ne.jp" then register "Secret Code" (P106).

Picture ID

- Depending on the size of the registered image, an image may take a while to open.
- If the caller does not send Caller ID, the registered image or video/i-motion will not be displayed/played for an incoming call.
- The following file formats can be set (but some files such as restricted files or files including only movies or sounds may not be set): JPEG, GIF (including animation GIF), and MP4 (Mobile MP4).
- · If a video/i-motion is saved as a "Ringer ID", "i-motion" will not appear.
- When an image is registered, it is displayed on the Phonebook list screen, Phonebook detail screen, and Incoming screen. When a video/i-motion movie is registered, it will be played when a call arrives. (They are not played when "Profile" is set to "Vibrate")

Ringer ID

- The registered ringtone does not sound if a caller does not send Caller ID.
- The following file formats can be set (but some files such as restricted files or files including only movies or sounds may not be set): SMF, MFi, MP4 (Mobile MP4), and AMR.
- This item cannot be selected when a video/i-motion movie is saved to "Picture ID".
- When a video/i-motion movie is saved, it will be played when a call arrives and an image saved under "Picture ID" will not be displayed. (They are not played when "Profile" is set to "Vibrate", and the image saved in "Picture ID" is displayed)

Secret

• If "Secret Data" is set to "Hide", the setting field of "Secret" does not appear.

Saving in the UIM Contacts

Create Contact screen (P93) > "Store To" > "UIM"

 When "Default Storage" is set to "UIM", you do not need to select "Store to" "UIM".

Name:	
Number:	
Email:	
Store To: U	IM
Category: 1	むし

Create Contact screen

Continued on the next page

2

Perform the following operations

Name

Enter using Kanji, Hiragana, symbol, alphanumeric or Katakana (full-pitch only). Up to 10 full-pitch or 21 halfpitch characters can be entered.

Enter a name

Reading

Enter or edit when necessary. Enter using Katakana (full-pitch only), alphanumeric (half-pitch only) or symbol (half-pitch only). Up to 12 full-pitch or 25 half-pitch characters can be entered.

Enter a Reading

Number

Up to 26 digits can be entered to the UIM Card (green) and up to 20 digits to the UIM Card (blue).

Enter a phone number

Email

Enter using alphanumeric or symbol. Up to 50 half-pitch characters can be entered.

Enter an Email address

Category

Select a category Select]

(Complete] [Complete]

Note

- In the phonebook registered in the UIM, Speed No. (P102) is set automatically.
- · You cannot save an entry to the Phonebook unless the name and either phone number or Email address is entered.
- If a call arrives while saving an entry, the data being registered will not be saved if the following is performed:
 Answer the call
 Place the call on answer hold
 Record Message started
- Names or readings in Katakana can be entered only in full-pitch.
- If text with an embedded carriage return is saved to the Phonebook, the text after the carriage return may not be available after the entry has been sent via Infrared or Bluetooth.

Name/Reading

If you use both full-pitch and half-pitch characters, up to only 10 characters for Name and 12 characters for Reading
may be saved.

Number

- The following operations can be performed by pressing 上 [Function] on the Phone number entry screen:
 - Selecting "Insert" ♦ "Pause", "Wait", or "n" enters "p", "w" or "n" in the order after the entered phone number. →P57
 - Select "Editing function" to edit the characters. →P298
 - Select in order of "Browse" "Received Calls"/"Dialed Calls"/"Phonebook" to select a phone number from a call log or Contact to enter the phone number.
 - Select "Cancel Entry" to cancel the entry.

Email

An Email address without "@" cannot be saved.

Function Menu on the Create Contact Screen

Create Contact screen (P93, P95) ♦ 👍 [Function] ♦ Perform the following operations

Add Number Add another phone number entry field.

Add Email Add another Email address entry field.

Add URL

Add a URL entry field.

Add Postal Address

Add a postal address entry field.

Cancel

Cancel saving an entry to the Phonebook.

Note

· If "Store To" is set to "UIM", only "Cancel" is displayed.

Saving Contacts to the Phonebook from Received **Calls or Dialed Calls**

You can save entries to a Phonebook from the list screen or detail screens of calls, mail, SMS or bookmarks that contain a phone number, mail address or URL, Also, you can save a phone number currently being entered/displayed on the Phone number entry screen or web site, etc.

Open the screen containing items to store

- To store from the Dialed Calls list screen (P54)/Dialed Calls detail screen (P55)/Received Calls list screen (P66)/Received Calls detail screen (P66)
 - □ Function I select "Store".
 - · To store from the Dialed Calls list screen/Received Calls list screen, select the entry to store before performing this operation.
 - · If the phone number of the history entry has already been stored in the Phonebook, "Store" will not appear.
- To save from the Phone number entry screen Press [Store].

Saving an image, video/i-motion in the Databox

Select an image, video/i-motion and press 4 [Function], then select "Apply as" + "Phonebook Entry".

To store the email address of a sender or recipient of mail

On the email list screen/email detail screen, press (h_/ [Function] and select "Check address", then press (•) to select "Save in Phonebook" (if the email has more than one email address, select an address to store and perform the steps).

To save from other screens

Select an item or phone number and press 4 [Function], then select "Store".

Perform the following operations

 If no entry is saved in the Phonebook specified as the "Default Storage", the Create Contact screen opens. Go to Step 3.

Create New Contact

Save a new entry to a Phonebook. Go to Step 3.

· The Create Contact screen opens with the information already entered.

Add items to a saved Phonebook entry.

- ♦ Select a Contact to add items ♦ ●
- The Edit Contact screen opens with the additional information already entered.
- To add an entry to the UIM contact, performing the above steps displays an item to be overwritten, and pressing <u>.</u> [Select] opens the Create Contact screen with the overwritten item.

Replace Number, Replace Email, Replace URL, or Replace Picture

Overwrite the corresponding item in the saved Phonebook entry.

- ♦ Select a Phonebook entry to overwrite ♦ ♦ Select a phone number, Email address, or URL to overwrite ♦ ▲ [Select]
- When selecting "Replace Picture", select a Phonebook entry to overwrite, press (), and press 上 [Yes].
- The Edit Contact screen opens with the information already replaced.
- 3
 - Save/edit the Phonebook entry ♦ ♣ [Complete]/
 - For saving a Contact, see Step 2 in "Saving in the FOMA Handset (Phone) Contacts" (P93).

Note

- Items displayed on the Create or Edit Contact screen vary depending on the items saved in the Phonebook entry (phone number, Email address, URL image, or video/i-motion).
- Only if the same item (phone number, Email address, URL, or image) has been saved in the Phonebook entry, you
 can overwrite it. For example, if a URL has been saved to a Phonebook entry from a Bookmark list screen, "Replace
 URL" is displayed when saving a URL from the message text, etc. next time.
- Information can be saved to a Phonebook entry also from the Barcode scanned result screen. →P152
- When selecting other than "Create New Contact" in Step 2, the following operations can be performed by pressing
 (Implicit Contact selection screen (Displayed items differ depending on the settings in the Phonebook or registered contents):
 - Select "Search" to find a Contact. →P100
 - Selecting "View UIM Card" displays Phonebook entries on the UIM contacts.
 - Selecting "View Phone Contacts" displays the FOMA handset (Phone) contacts.
 - Select the order of "View" ◆ "Phone & UIM Card"/"Phone Contacts"/"UIM Card" to select a Contact type (phone or UIM).
 - Select "Cancel" to cancel the operation.
- If you attempt to store a text string longer than the maximum number of characters allowed, a message indicating
 that the maximum has been reached is displayed, and the Create Contact screen opens with the excess characters
 deleted. However, if you attempt to store a phone number that exceeds the maximum number of characters from the
 Phone number entry screen, this message will not be displayed.
- When "Default Storage" is set to "UIM Card", if you attempt to save items that cannot be saved to the UIM contacts, a confirmation screen whether to save the entry to the FOMA handset (Phone) contacts opens. Press <u>J</u> [Yes] to save the entry to the handset.

Edit Categories

Saving/Editing a Category Name

Category names for the FOMA handset (Phone) contact and the UIM contact can be saved, edited and managed. Up to 10 groups can be saved in the FOMA handset Phonebook, and up to 11 groups can be added to the UIM Phonebook.

- The pre-installed "なし(None)" cannot be edited or deleted.
- · Only the category names and members can be saved/edited on the UIM contact.
- To edit a category of an entry of the FOMA handset (Phone) or UIM contact that is not displayed currently, switch to the correct Phonebook using "View" in advance.

Phonebook list screen (P102)/Phonebook detail screen (P103) Image Contacts" "Edit Categories"

When "View" is set to "Phone & UIM Card"

Press I [Function] and select "Manage Contacts" • "Edit Phone Categories"/"Edit UIM Categories".

To view the saved contents of a category before editing Select a category and press (•). The Category detail screen opens and you can check a set image or ringtone, or assigned members.

To edit or delete a saved category

Select a saved Category and press [Function], then select "Edit Category" or "Delete Category".

- · Go to Step 3 if "Edit Category" is selected.
- When selecting "Delete Category", press I (Yes) to delete.

"[New Category]"

Categories なし 1 member 1/ 11-7° 1 0 members 1 1-7°2 0 members Categories screen

(Example: FOMA handset (Phone) contact)

Create Category Name: Members: O members Picture ID: Nond ight ID: (None) Ringer ID: None

screen

contact)

Create Category (Example: FOMA handset (Phone)

Phonebook 🚺 Edit Categories

Perform the following operations

Name

Enter a category name. Up to 24 full-pitch/half-pitch characters can be entered.

Enter a name

Members

Select a Phonebook entry from the select a member screen.

Checkmark to a Phonebook entry to save

Picture ID

Specify an image or video/i-motion to be displayed on the incoming call screen when a call arrives from a group member.

My Pictures :	Select from images saved in the "My Pictures" folder. ♦ Select a folder ♦ ● ♦ Select an image ♦ ●
i-motion :	Select from videos/i-motion movies saved in the "i-motion" folder. ♦ Select a folder ♦ ● ♦ Select a video/i-motion movie ♦ ●
None :	No image or video/i-motion movie is displayed.

Light ID

Specify the color of Illumination Indicator to blink when a call arrives from a group member.

Select an Light ID < _ [Select]</p>

If you select "None", this option is set to the same setting as "Light ID".

Ringer ID

Specify a ringtone/vibration pattern for a call from a category member.

i-motion	 Select from videos/i-motion movies saved in the "i-motion" folder. ♦ Select the folder ♦ ● ▶ Select a video/i-motion movie ▶ ●
Melody	 Select from melodies saved in the "Melody" folder. ♦ Select a folder ● ● ● Select a melody ● ●
Voice Notes	Select from Voice Notes saved in the "Voice Notes" folder. ♦ "Voice Notes (All)"/"My Notes" ♦ Select a Voice Note ♦ ●
Vibration Patte	 m: Select from 5 types of vibration patterns. →P116 ♦ Select a vibration pattern ♦ ▲ [Select]
Silent	: Set the handset to not sound the ringtone/to not vibrate.
None	: The ringtone sounds in accord with the settings in Profile.

[Complete]

Note

· You can also perform "Edit Category" or "Delete Category" from the Function menu on the Category detail screen.

Members

- The following operations are available by pressing 上 [Function] on the Member selection screen:
 - Select "Search" to find a Contact. →P100
 - Select "Select All" to select all Contacts and select "Unselect All" to deselect all Contacts.
 - Select "View Selected" to open and check a list of selected Contacts.
 - Select "Cancel" to cancel the operation.

Picture ID

- If a caller does not send Caller ID, the image, video or i-motion movie registered for an incoming call will not be displayed/played.
- The following file formats can be set (but some files such as restricted files or files including only movies or sounds may not be set): JPEG, GIF (including animation GIF), and MP4 (Mobile MP4)
- If a video/i-motion is registered as a "Ringer ID", "i-motion" will not appear.
- When an image is registered, it is displayed on the Category screen, Category detail screen, Phonebook list screen, Phonebook detail screen, and Incoming screen. When a video/i-motion movie is registered, it will be played when a call arrives (They are not played when "Profile" is set to "Vibrate").

Ringer ID

- The registered ringtone does not sound if a caller does not send Caller ID.
- The following file formats can be set (but some files such as restricted files or files including only movies or sounds may not be set): SMF, MFi, MP4 (Mobile MP4), and AMR
- This item cannot be selected when a video/i-motion movie is saved to "Picture ID".
- When a video/i-motion movie is registered, it will be played when a call arrives and the image saved in "Picture ID" will not be displayed (When "Profile" is set to "Vibrate", this video/movie is not played and the image registered in "Picture ID" is displayed).

Search/Filter by/Speed No.

Making a Call from the Phonebook

 When searching Phonebook entries set to Secret, to include entries set as secret, set "Secret Data" to "Show" in advance.

Making a Call Searching the Phonebook

You can enter Katakana, Number, Alphabet or Symbol to search for an entry.

- 1
- Phonebook list screen (P102) ♦ → [Function] ♦ "Search" ♦ Perform the following operations

Katakana

Enter katakana contained in any item of the Phonebook entry. Up to 8 characters can be entered.

Enter Katakana

Alphabet

Enter alphabet characters contained in any item of the entry. Up to 8 characters can be entered.

Enter alphabet characters

Number

Enter a number contained in any item of the Phonebook entry. Up to 8 characters can be entered.

Enter the number

∕/

Symbol

Enter a symbol contained in any item of the entry.

♦ Select a symbol ♦ ▲ [Confirm] ♦ ●

 \boldsymbol{O}

The Phone number entry screen opens with the phone number entered.

When the target Phonebook entry is not selected

Select an entry and press O/ \mathbb{Q} .

When multiple phone numbers is saved in the Phonebook entry Press (\circ) to display the phone number to call and press $(\circ)/($

0

To make a video call Press

Note

- While an entry field for Katakana/Alphabet/Number/Symbol is displayed in Step 1, press 📥 [Function] and select "Entry Mode" to switch to another searching method.
- · When "Dialing Restriction" is set to "On", performing Step 2 does not open the Phone number entry screen but dials a voice/video call.

Making a Call Using Filter by

You can search a Phonebook entry using Filter by on the Phonebook list screen.

 The displayed names will be changed if a Category is saved/changed or the displayed Contact type (Phone/ UIM) is different.

Phonebook	list screen (P102) ♦ 🐨	* Email #
Phonebook	: Display all Phonebook entries.	DoCoMo Ichi docomo.ta4
Email	: Display only Phonebook entries with Email address.	Keitai Hana… docomota…
なし(None)	: Display only Phonebook entries saved under the Category "なし(None)" of FOMA handset (Phone) contact or UIM contact.	[New Fntry]
グループ1 (Group ⁻	i) : Display only Phonebook entries saved under the Category "グループ1(Group1)" of FOMA handset (Phone) contact.	screen (Example: Searched by Email)
グループ2 (Group:	2) : Display only Phonebook entries saved under the Category " グループ2(Group2)" of FOMA handset (Phone) contact.	
グループ3 (Group:	3): Display only Phonebook entries saved under the Category " of FOMA handset (Phone) contact.	グループ3(Group3)"

Select a Phonebook entry

The Phone number entry screen opens with the phone number entered.

When multiple phone number is saved in the Phonebook entry Press \bigcirc to display the phone number to call and press $\bigcirc/$

0

To make a video call

Press 🖫.


Note

- You can also press I [Function] and select "Filter by" on the Phonebook list screen to display the found entries.
- When "Dialing Restriction" is set to "On", performing Step 2 does not open the Phone number entry screen but dials a voice/video call.

Making Calls Using Speed No.

Enter Speed No. on the Wallpaper screen to search the UIM Phonebook.

· Speed No. is a number that is set automatically when you register a UIM Phonebook. You can confirm Speed No. on the UIM Phonebook detail screen (P103).



UIM Phonebook detail screen appears.

 $\left(\mathbf{O} \right)$

To make a video call Press 🚇.

Viewing a Phonebook Entry

You can change the display format of the Phonebook list screen from "Setup" on the Function menu. →P108



Phonebook entry storage location

- Saved in the FOMA handset Phonebook*
- Saved in the UIM contact
- *: If an image is saved in the Phonebook or category, the image is displayed.
- 2 A phone number for video calls
- 3 The first phone number and type icon



Phonebook list screen as an image

*	Phonebook		#
DoCoMo	Ichiro	۵	•
DoCoMo	Jiro	۵	•
Kcitai	Hanako		•
[New Er	ntry]		

Phonebook list screen as 1-Line

If no phone number is saved, other contents saved will be displayed.

4 Appears if multiple items are saved

Press (•) to switch the displayed item.

•	If an image is saved in the Phonebook or category
	the image is displayed above the name.

 On the bottom line of the UIM Phonebook detail screen, Speed No. that was set at registration is displayed (P102).

Keitai Hanako	
Reading: Keitai Hana	iko
Nickname: Kei	
General Phone I:	
090XXXXXXXX	

	Details !
Keitai	Haruko
Reading	k: Keitai Haruko
Number	
a 080)	XXXXXXXX
Catoro	ry: なし
Speed 1	
UIM	Phonebook
de	tail screen

FOMA handset (Phone) contacts detail screen

Operations from the Phonebook list screen

Select a Contact 🕨 (•)

Select a Phonebook entry and press 0 to make a call, send mail or visit a web site. Perform operations as follows:

Phone number: The Phone number entry screen opens with the phone number entered.

Email Address: The Compose message screen opens with the address entered.

- URL: Connects to a URL.

Operations from the Phonebook detail screen

Select a phone number, Email, or URL and press \odot to open a screen of the following items:

"Call": Makes a voice call to the selected phone number.

"Video Call": Makes a video call to the selected phone number/mail address.

"Send SMS": Create and send SMS with the phone number of the currently selected phone number as an address. →P206

"Send Mail": Create and send a new message to the selected phone number/Email as an address. →P184 "Go To": Connects to the selected URL.

"Store as Bookmark": Save the selected URL in Bookmarks.

- Selecting a phone number and pressing ()/ also opens the Phone number entry screen with the phone number entered.
- Selecting a mail address and pressing 0 also creates and sends mail.
- Selecting a URL and pressing 0 also connects to a web site.

Function Menu on the Phonebook List Screen

Default View: Phone Contacts Filter by: All Phone Contacts

- To use an entry of the Phonebook on the FOMA handset (Phone) contact or UIM contact switch to the correct Phonebook using "View" in advance.
- · Displayed items differ depending on the settings in "View".

Phonebook list screen (P102) ▶ → [Function] ▶ Perform the following operations

Search

Search for a Phonebook entry. →P100

Browse URL

Connect to the URL saved in the currently selected Phonebook entry.

• When other items are saved, press 😔 to display the URL to connect to before operating.

Send Message

- If more than one item is saved, use to display the destination phone number/Email address before operating.
- Mail : Create and send an i-mode mail with the phone number/Email of the currently selected entry as an address. →P184

SMS : Create and send SMS with the phone number of the currently selected entry as an address. →P206

Caller ID

Make a call setting send/hide Caller ID. →P56

• If multiple phone numbers is saved, press 💮 to display the phone number to use before operating.

Multi Number

Make a call by selecting a dial number. →P286

• If multiple phone numbers is saved, press 💬 to display the phone number to use before operating.

Create New

Go to Step 2 in "Saving in the FOMA Handset (Phone) Contacts" (P93)/Step 1 "Saving in the UIM Contacts" (P95).

Edit Contact

Edit the selected/displayed Contact. Go to Step 2 in "Saving in the FOMA Handset (Phone) Contacts" (P93)/Step 1 "Saving in the UIM Contacts" (P95).

Add to Speed Dial/Remove Speed Dial

Save/Remove the phone number of the currently selected entry as a speed dial. The following operations are needed for adding.

- If multiple phone numbers is saved, press 💬 to display the phone number to save/remove before operating.
- Select a dial number

View

Select a type of Phonebook (Phone or UIM) to be displayed on the Phonebook list screen.

Phone & UIM Card : Display all Phonebook entries.

UIM Card	: Display entries only in the UIM contact.
Phone Contacts	: Display entries only in the FOMA handset (Phone) contact.

Filter by

Sets the displaying method of the Phonebook list screen.

All Contacts	:	Display all Phonebook entries.
All Phone Contacts	:	Display all entries in the FOMA handset (Phone) contact.
All UIM Card Contacts	:	Display all entries in the UIM contact.
Email	:	Display only entries with an Email address.
Category	:	Display entries only in the specified category. ♦ Select a category ♦

Insert in Message

• If multiple phone numbers is saved, press 💬 to display the phone number/Email to enter before operating.

- Mail : Create and send mail with the name and phone number/Email address of the currently selected Phonebook entry entered in the message text. →P184
- SMS: Create and send SMS with the name and phone number/Email address of the currently selected Phonebook entry entered in the message text. →P206

Send Contact

- Infrared : Send the currently selected Phonebook in FOMA handset (phone) phonebook entry via infrared. →P254
- Bluetooth : Send the currently selected Phonebook in FOMA handset (phone) phonebook entry via Bluetooth. →P273

Send All

```
Infrared : Send all Phonebook entries saved on the FOMA handset (Phone) contact via infrared. →P255
Bluetooth : Send all Phonebook entries saved on the FOMA handset (Phone) contact via Bluetooth. →P273
```

Delete Contact

Delete the selected contact. →P107

Print

Print the currently selected entry using a Bluetooth printer. →P275

Phonebook Viewing a Phonebook Entry

Select Multiple to

Select multiple Phonebook entries and perform various operations. For steps to select multiple entries, see "Selecting and Deleting Multiple Phonebook Entries" (P107).

Delete : Delete multiple phonebook entries at once. Copy to UIM Card : Copy all phonebook entries to the UIM contact at once.
Copy to UIM Card : Copy all phonebook entries to the UIM contact at once.
Copy to Phone : Copy all phonebook entries to the FOMA handset (Phone) contact.
Copy Phone to UIM: Copy all phonebook entries to the UIM contact at once.
Copy UIM to Phone: Copy multiple FOMA handset (Phone) contacts to the UIM phonebook at once.
Print : Print multiple phonebook entries to a Bluetooth printer at once. →P275

Manage Contacts

Speed Dial	:	Check, assign or remove the Speed dial. →P110
Edit Phone Categories	S :	Sets categories to the FOMA handset (Phone) or UIM contact. \rightarrow P98
Edit Categories	:	Set categories to the FOMA handset (Phone) contact. →P98
Edit UIM Categories	:	Set categories to the UIM contact. →P98
Phone Capacity	:	Check the available memory on the FOMA handset (Phone) contact. →P109
UIM Capacity	:	Check the available memory on the UIM contact. \rightarrow P109

Copy to UIM Card/Copy to Phone

Copy the selected contacts to the UIM/the FOMA handset (Phone) contact.

Edit Before Call

Open the Phone number entry screen with the phone number of the currently selected contact. \rightarrow P52

• If more than 1 phone number is saved, use 💬 to display the phone number to use before operating.

Setup

Set a display format (View by) of the Phonebook list screen or specify the default storage location when you save a Contact. →P108

Send Tones

Send the phone number of the currently selected entry as touch-tone signals (DTMF).

Note

Edit Contact

• When "Dialing Restriction" is set to "On", you cannot edit a Phonebook entry.

View

When "UIM" is selected, is displayed on the Phonebook list screen.

Copy to UIM Card

- · When copying a Phonebook entry with multiple phone numbers to the UIM contact, the phone number saved first will be copied.
- If half-pitch katakana is entered in "Name" or "Reading", it is converted into full-pitch katakana. If the maximum number of characters is exceeded, it is saved with the excess characters deleted.

Send Tones

 This option appears only after is [Swap] is pressed during a call to open the Applications screen, and a Contact is displayed by selecting "Contacts".

Function Menu on the Phonebook Detail Screen

The displayed items vary depending on the type of displayed phonebook (phone/UIM card) detail screen.

Phonebook detail screen (P103) \blacktriangleright $\boxed{+}$ [Function] \blacktriangleright Perform the following operations

Send Message

Mail : Create and send an i-mode mail to the selected phone number/Email address as an address. →P184

SMS : Create and send SMS with the phone number of the currently selected phone number as an address. →P206

Browse URL

Connect to the currently selected URL.

Caller ID

Make a call to the selected phone number setting send/hide Caller ID. →P56

Multi Number

Select a number and make a call to the selected phone number. →P286

Create New

Go to Step 2 in "Saving in the FOMA Handset (Phone) Contacts" (P93) or Step 1 in "Saving in the UIM Contacts" (P95).

Edit Contact

Edit the displayed Phonebook entry. Go to Step 2 in "Saving in the FOMA Handset (Phone) Contacts" (P93) or Step 1 in "Saving in the UIM Contacts" (P95).

Add to Speed Dial/Remove from Speed Dial

Save or cancel the phone number of the currently displayed entry as a speed dial. Perform the following operation to add as a speed dial:

Select a dial number

Insert in Message

- Mail : Create and send i-mode mail with the name of the currently displayed Phonebook entry and the currently selected phone number/Email address entered in the message text. →P184
- SMS : Create and send SMS with the name of the currently displayed Phonebook entry and the currently selected phone number/Email address entered in the message text. →P206

Send Contact

Infrared : Send the currently displayed Phonebook entry via infrared. →P254

Bluetooth : Send the currently displayed Phonebook entry via Bluetooth. →P273

Delete Number/Delete Email/Delete URL/Delete Address

Delete the currently selected phone number/Email address/URL/Postal address.

Delete Contact

Delete the currently displayed Phonebook entry. →P107

Print

Print the currently displayed entry using a Bluetooth printer. →P275

Manage Contacts

Speed Dial : Check, save or remove the Speed dial. →P109

Edit Categories : Set the Category to the FOMA handset (Phone) or UIM contact. →P98

Phone Capacity : Check the usage of the FOMA handset (Phone) contact memory. →P109

UIM Capacity : Check the usage of the UIM contact memory. →P109

Copy to UIM Card/Copy to Phone

Copy the currently displayed Phonebook entry to the UIM/FOMA handset (Phone) contact.

Edit Before Call

Open the Phone number entry screen with the currently selected phone number entered. →P52

Setup

Set a display format (View by) of the Phonebook list screen or specify the default storage location when you save an entry. \rightarrow P108

Secret Code

Save the secret code to the phone number/Email adress. →P181

Enter the Unlock Code

Send the phone number of the currently displayed entry as touch-tone signals (DTMF).

Note

Delete phone number/Delete Email/Delete URL/Delete postal address

 If some contents are registered and the first one is deleted, the second and subsequent ones will be moved up and saved.

Copy to UIM Card

 When copying a Phonebook entry with multiple phone numbers to the UIM contact, the phone number saved first will be copied.

Secret Code

- If you select a phone number or email address saved with the secret code and display the function menu, "★" appears next to the item name of the "Secret code".
- To cancel the Secret Code, delete the entered Secret Code and save the entry again.
- · This cannot be stored on the UIM contact.
- If a Secret Code is registered to the mail address stored as "phone number + Secret Code@docomo.ne.jp", you
 cannot reply to mail sent from that address.

Send Tones

 This option is available only after is [Swap] is pressed during a call to open the Application screen, and a Phonebook entry is displayed by selecting "Phonebook".

Deleting Contacts

Deleting One Contact

Deletes the selected/displayed entry.

· For deleting from the Phonebook list screen, select an entry then delete it.

Select and Delete Multiple Phonebook Entries at a Time

- If either of the FOMA handset (Phone) contact or UIM contact is displayed, entries are deleted from the displayed Phonebook.
 - Phonebook list screen (P102) ♦ _h [Function] ♦ "Select Multiple to" ♦ "Delete"



Multiple selection screen (Example:Delete Contact)

Checkmark to a Phonebook entry to delete ♦ 🗔 [Complete]

- Check mark to all Phonebook entries and press 📠 [Complete].
- 👍 [Yes]

The selected Phonebook entry will be deleted.

Function Menu on the Multiple Selection Screen

· Displayed items differ depending on the settings in "View".

Multiple selection screen (P107) ♦ → [Function] ♦ Perform the following operations

Search

Search for a Phonebook entry. \rightarrow P100

Select All/Unselect All

Select/Unselect all Phonebook entries.

View Selected

Open and check a list of selected Phonebook entries.

View UIM Card/View Phone Contacts/View by

Switch a view to the FOMA handset (Phone) contact or UIM card contact.

• When selecting "View by", select "Phone & UIM Card"/"Phone Contacts"/"UIM Card" to switch the view.

Cancel

Cancel the operation.

Setup

Setting Details of the Phonebook

Default View by: Images Default Storage: Phone

You can set a display format (View by) of the Phonebook list screen or specify the default storage location when you save a Contact.

• When "View" is set to "UIM Card", the Display format is set to "View by 2-Line" by default.



View by

"List"/"Image"

Default Storage

Set the saving destination displayed in "Store To" in advance when the Create Contact screen opens.

- If "Phone" is selected, the Default Storage will be set without displaying the confirmation screen.

Note

View by

• When "View" is set to "UIM Card", select "1-Line" or "2-Line".

Checking the Phonebook Capacity and Utilization

You can check the available memory space on the phone and the UIM.

Phonebook list screen (P102)/Phonebook detail screen (P103) 🕨 IFunction] ■ "Manage Contacts" ■ "Phone Capacity"/"UIM Capacity"

Phone Capacity

The usage of the FOMA handset (Phone) contact memory is expressed in 7 levels from 0 to 6 (1 notch is approximately 17% of memory usage).

UIM Capacity

Available memory space for Phonebook on the UIM card is displayed on "Number of Saved Contacts/Available Number of Contacts".



screen



screen

Making a Call Using Speed Dial

You can quickly make a voice call only by pressing a Dial Key from 1 to 9 on the Wallpaper screen to dial the phone number assigned to the Dial Key.

You need to assign a phone number to a Dial Key in advance.

Press a Dial Key from 1 to (for 1+ seconds)

The voice call is dialed.

To view the assigned phone numbers eed Dial Entries On the Phonebook list screen (P102)/the Phonebook detail screen (P102), press 1: DoCoMo Taro [Function] Select "Manage Contacts" "Speed Dial". 2: No number assigned The Speed Dial Entries screen opens and you can check the phone number assigned to 3:No number assigned each Dial Key. 4:No number assigned 5: No number assigned 6: No number assigned 7: No number assigned

Speed Dial Entries screen

Assigning a Phone Number to a Dial Key

You can assign a phone number from a contact to make Speed dial calls.

- Only Phonebook entries stored on the FOMA handset (Phone) contact can be saved as Speed Dial.
- A contact that does not have a phone number cannot be saved in Speed dial.

Phonebook list screen (P102)/Phonebook detail screen (P103) 🕨 IFunction] ► "Add to Speed Dial"

The speed dial screen opens.

- · For assigning from the Phonebook list, select an entry before operating.



Select a dial number 🕨 🖅 [Select]

If a dial number already saved is selected

The confirmation screen to overwrite opens. Press Imp [Yes] to overwrite.

To remove from Speed Dial

To cancel Speed Dial from the Phonebook list screen (P102), select the entry assigned to a Speed Dial, press \fbox [Function], and select "Remove Speed Dial". If the assigned phone number is not displayed, press \bigcirc to display the phone number before operating.

To cancel Speed Dial from the Phonebook detail screen (P103), select the phone number assigned to a Speed Dial, press <u>L</u> [Function], and select "Remove Speed Dial".

Function Menu on the Speed Dial Entry Screen

Speed Dial Entries screen (P109) ♦ → [Function] ♦ Perform the following operations

Assign Contact

Assign a phone number to an unsaved speed dial number.

- Select a Contact
- If multiple phone numbers is assigned, press 😔 to display the phone number to change before operating.

Change Contact

Change the assigned phone number.

- Select a Contact Select]
- If multiple phone numbers is assigned, press 😔 to display the phone number to change before operating.

Remove Contact

Cancels the phone number assigned in the dial number.

Clear All

Clears all assigned phone numbers.

🕈 🖅 [Yes]

Specifying a Contact to Use as a Speed Dial

Default Phone Memory

Only FOMA handset (Phone) contact can be saved as Speed Dial. This setting cannot be changed.



● ◆ 🙀 (Settings) ◆ "General Settings" ◆ "Speed Dial" ◆ "Phone Memory"

Tone/Screen/Light Settings

Tone Settings

Selecting Ring Pattern < Profile>	112
Changing the Ringer ID and Volume	113
Vibrating Instead of Ringtone or Alarm <vibrate></vibrate>	115
Setting a Touch-tone Signal (DTMF) <dtmf></dtmf>	116
Sounding a Ringtone Only from the Headset <ringer options=""></ringer>	117
Muting Handset Tones <manner mode=""></manner>	117
Changing Manner Mode <mode></mode>	118

Screen/Light Settings

120
121
122
122
123
123
124
124
124
125
125
126
126
126
126

Selecting Ring Pattern

Default Sound Style 1

By changing the Ring Pattern, you can change the ringtone, alarm tone, ring volume and keypad sound volume at once.



'Sound Style 1"/"Sound Style 2"/"Vibe then Ring"/"Silent"

Note

- You can change the pre-set tones or volumes. →P113
- After each Ring Pattern is selected, one of the following icons appears at the top of the screen: 🕼 🕄 (Sound Style 1) 🛛 📢 (Sound Style 2) 🐌 🛒 (Vibe then Ring) 🖉 (Silent)
- When "Vibe then Ring" is selected, the handset vibrates then the ringer ID sounds.
- If you select "Silent", the line "Silent" is displayed on the position that the date is displayed on the Wallpaper screen.
- You can also change your Ring Pattern by pressing + //- then pressing + multiple times when the FOMA handset is closed with the Wallpaper screen displayed. However, Ring Pattern can not be changed when Manner Mode is activated.
- "Vibrate" →P115

Settings for Each Ring Pattern

The following table shows the default settings of each Ring Pattern

	Item			
item	Sound Style 1	Sound Style 2	Vibe then Ring	Silent
Ring Volume	5	2	4	-
Voice Calls	05.Solar	05.Solar	05.Solar	-
Video Calls	19.Bells	19.Bells	19.Bells	-
Mail*1	21.Triads	21.Triads	21.Triads	-
Voicemail	08.Fusion	08.Fusion	08.Fusion	-
Message R	20.Standard	20.Standard	20.Standard	-
Message F	20.Standard	20.Standard	20.Standard	-
Calendar Alarm	19.Bells	19.Bells	19.Bells	Silent
Data Calls	20.Standard	20.Standard	20.Standard	-
File Transfer	Silent	Silent	Silent	-
Chat Mail	20.Standard	20.Standard	20.Standard	-
Ringer IDs	On	On	On	-
Key Volume	2	2	2	-
Reminders*2	Off	Off	Off	Off

*1: When i-mode mail or SMS is received, incoming call actions are taken in accord with the setting of this item.

*2: Reminders is a function to notify you approximately every 5 minutes, with beeps or handset vibration when the notification screen for a recorded message or a missed call is open.

Tone/Screen/Light Settings

Changing the Ringer ID and Volume

Changing the Ringer ID and Volume

Default See "Settings for Each Ring Pattern" (P112)

You can change various tones set to Ring Pattern. You can also set the Ringer ID saved for a Contact to silent.

- Set "Profile" to the Ring Pattern to change ("Sound Style 1", "Sound Style 2", "Vibe then Ring" or "Silent") in advance.
- · When "Style" is set to "Silent", only "Calendar Alarm" and "Reminders" can be changed.

(●) ◆ ₩ (Settings) ◆ "Sound Profiles" ◆ "(Ring Pattern) Detail"

• The pattern name set under "Profile" is displayed in "(Ring Pattern)".

Sound Style 1 Detail
Ring Volume: 5
Voice Calls: <u>05.Solar</u>
Video Calls: <u>19.Bells</u>
Mail: <u>21.Triads</u>
Voicemail: <u>08.Fusion</u>
Message R: 20.Standard
Message F: <u>20.Standard</u>
Style Detail
screen (Evample

screen (Example Sound Style 1)

2

Perform the following operations

Ring Volume

The volume can be adjusted in 8 levels from 0 to 7.

Voice Calls

Change the ringer ID/vibration pattern to be used for incoming voice calls.

i-motion :	Select from videos/i-motion movies saved in the "i-motion" folder. ♦ Select the folder ♦ ● ♦ Select a video/i-motion movie ♦ ●
Melody	Select from melodies saved in the "Melody" folder. ♦ Select the folder ♦ ● ♦ Select a melody ♦ ●
Voice Notes	Select from Voice Notes saved in the "Voice Notes" folder. ♦ "Voice Notes (All)"/"My Notes" ♦ Select a Voice Note ♦ ●
Vibration Pattern:	Select from 5 types of vibration patterns. →P116 ♦ Select a vibration pattern ♦ ()[Select]
Silent :	Set to not sound/vibrate a ringtone.

Video Calls

Change the ringtone for incoming video calls/vibration pattern to be used. For operations, see "Calls".

Mail

Change the ringer ID/vibration pattern to be used for incoming i-mode mail or SMS. For operations, see "Calls".

Voicemail

Change the ringtone/vibration pattern when a message is recorded in Voicemail service. For operations, see "Voice Calls".

Message R

Change the ringtone/vibration pattern to be used for incoming MessageR. For operations, see "Calls".

Message F

Change the ringtone/vibration pattern to be used for incoming MessageF. For operations, see "Calls".

Calendar Alarm

Change the alarm/vibration pattern to be used for the set time in Reminder of Event/Task. For operations, see "Calls".

Data Calls

Change the ringtone/vibration pattern to be used for incoming data. For operations, see "Calls".

File Transfer

Change the ringtone/vibration pattern to be used when a file is received via Bluetooth communication. For operations, see "Calls".

Chat Mail

Change the ringtone/vibration pattern to be used for incoming Chat mail. For operations, see "Calls".

Ringer IDs

Set whether to sound the ringtone registered in the Phonebook entry when a call from the other party registered in the Phonebook entry arrives.

"On"/"Off"

Key Volume

Adjust the volume of the keypad sound. The volume can be adjusted in 8 levels from 0 to 7.

Use ()/Dial Keys to adjust the volume

Reminders

Set to sound beeps or to vibrate the handset every 5 minutes to remind you of the open Record Message notification screen or missed call notification screen.

- Beep : Sound the beep tone.
- Vibrate : Vibrate the handset.
- Off : No action is taken.

Note

- · The set ringtone is displayed as its file name.
- If you set a video/i-motion that includes movie and sound as a ring tone (Chaku-motion), the Chaku-motion takes precedence over "Picture ID" (P94). However, if you set a video/i-motion that includes sound only, the image set in "Picture ID" takes precedence.
- · The following file formats can be set for the ringtone/beep (but some files such as restricted files or files including only movies or sounds may not be set): SMF, MFi, MP4 (Mobile MP4), and AMR.
- When multiple ringtones are set, the ringtone which actually sounds is prioritized (High → Low) as follows: Ringtone for Multi Number → Contact → Phonebook Category → normal ringtone
- You cannot set a video/i-motion movie to "Voicemail", "Data Calls", "File Transfer", and "Chat Mail".
- · The ringtone volume cannot adjusted individually.

Calendar Alarm

· If you set "Alarm" to other than "None" when saving a Schedule event or Task, an alarm tone sounds in accord with the "Alarm" setting for the Schedule event or Task.

Reminders

- When "Profile" is set to "Silent", "Beep" cannot be set.
- · When a message is recorded in Record Message, Reminders stay activated until the message is played.

01.Ambient	12.Urban	23.Funky Break
02.Nocturne	13.Bossa	24.Wa
03.Flowers	14.Interlude	25.Space pingpong
04.Soaring High	15.Hellomoto	26.Moving up
05.Solar	16.Midnight	27.Katana
06.Beats	17.Ringer	28.Hello
07.Vapor	18.Alert	29.Cyberspace
08.Fusion	19.Bells	30.Watermark
09.Ultra Violet	20.Standard	31.Got a mail
10.Grooving	21.Triads	32.Morning wave
11.Digital	22.Provincial	33.Big Mama


Ringtones, Melodies and Alarm Tones (Pre-installed)

Vibrate

Vibrating Instead of Ringtone or Alarm

Default Profile: Sound Style 1

You can set the handset to vibrate when a call or mail arrives or at a Datebook alarm time instead of a ringtone or alarm tone.

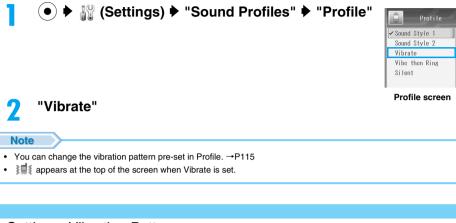

Setting a Vibration Pattern

Default Calls: Vibe Pulse Video Call: Vibe Dot Dash Mail: Vibe Dot Dot Voicemail: Vibe Dot Dot Message R: Vibe Dot Dot Message F: Vibe Dot Dot Calendar Alarm: Vibe Dot Data Calls: Vibe Dash File Transfer: Vibe Dot Dash Chat Mail: Vibe Dot Dot Reminders: Off

You can set a vibration pattern for events such as when a call or mail arrives, or at a Datebook alarm time.

• Set "Profile" to "Vibrate" in advance.

) 🕨 🎬 🕨 "Sound Profiles" 🕨 "Vibrate Detail"

Voice Calls

Change the vibration pattern for incoming voice calls.

Vibration Pattern : Select from 5 types of vibration patterns. →P116

Select a vibration pattern

Silent

: Set not to vibrate.

Video Calls

Change the vibration pattern for incoming video calls. For operations, see "Calls".

Mail

Change the vibration pattern for incoming i-mode mail or SMS messages. For operations, see "Calls".

Voicemail

Change the vibration pattern when a message is recorded in Voicemail service. For operations, see "Voice Calls".

Message R

Change the vibration pattern for incoming MessageR. For operations, see "Calls".

Message F

Change the vibration pattern for incoming MessageF. For operations, see "Calls".

Calendar Alarm

Change the vibration pattern for the set time of a Schedule event/Task reminder. For operations, see "Voice Calls".

Data Calls

Change the vibration pattern for incoming data. For operations, see "Voice Calls".

File Transfer

Change the vibration pattern when a file is received via Bluetooth communication. For operations, see "Voice Calls".

Chat Mail

Change the vibration pattern for incoming chat mail. For operations, see "Voice Calls".

Reminders

Set to vibrate the handset every 5 minutes when the Record Message notification screen or the missed call notification screen opens.

Vibrate : Vibrates the handset.

Off : No action is taken.

Note

· The set ringtone is displayed as its file name.

Reminders

When a message is recorded in Record Message, Reminders stay activated until the message is played.

Vibration Patterns

Pattern	Action
Vibe Dash	Repetition of approximately 2 second vibration → approximately 0.2 second pause
Vibe Dot	Repetition of approximately 1 second vibration \rightarrow approximately 0.2 second pause \rightarrow approximately 2 second vibration
Vibe Dot Dash	Repetition of approximately 1 second vibration → approximately 0.2 second pause
Vibe Dot Dot	Repetition of approximately 1 second vibration \rightarrow approximately 0.2 second pause \rightarrow approximately 1 second vibration \rightarrow approximately 0.1 second pause
Vibe Pulse	Repetition of approximately 1 second vibration \rightarrow approximately 0.2 second pause \rightarrow approximately 1 second vibration \rightarrow approximately 0.2 second pause \rightarrow approximately 1 second vibration \rightarrow approximately 0.2 second pause \rightarrow approximately 1 second vibration \rightarrow approximately 0.2 second pause \rightarrow approximately 1 second vibration \rightarrow approximately 0.1 second pause

DTMF

Setting a Touch-tone Signal (DTMF)

Default Long

You can change the length of a touch-tone signal (DTMF). You can also set it not to sound.



● ► 🙀 (Settings) ► "General Settings" ► "DTMF" ► Select length ► 🖃 [Select]

• When "Off" is selected, touch-tone signals (DTMF) will not be sent even if a Dial Key is pressed.

Sounding a Ringtone Only from the Headset

Default Headset & Speaker

You can set to sound a ringtone from the earphone of the Headset or of the FOMA handset Speaker while the miniUSB Stereo Headset M01 (optional) is connected to the handset. You can also set to sound a ringtone from both.

● ► 🙀 (Settings) ► "Headset" ► "Ringer Options" ► Perform the following operations

Speaker Only

The ringtone sounds only from the Speaker.

Headset Only The ringtone sounds only from the Headset.

Headset & Speaker

The ringtone sounds from both Speaker and Headset.


Note

Do not tie the cable of the miniUSB Stereo Headset M01 around the handset to use. The reception level may
decrease and the call may be interrupted, or noise may come.

Manner Mode

Muting Handset Tones

Turn off the tones that sound from the handset so as not to disturb others.



To cancel Manner Mode

Press # (for 1+ seconds) on the Wallpaper screen.


Note

- There are 3 types of Manner Mode: "Silent", "Manner Mode" and "Original Manner Mode". →P118
- \P appears at the top of the screen when Manner Mode is activated.
- A notification appears when you try to play a melody, video or i-motion movie etc., while Manner Mode is activated.
- Even when Manner Mode is activated, the camera shutter tone sounds.

Changing Manner Mode

Select actions of Manner Mode from "Silent", "Manner Mode" or "Original Manner Mode".

• You can change the actions of Original Manner Mode. →P119



Action in Each Mode

	Silent	Manner Mode	Original Manner Mode*
Ring Volume	0	0	In accord with the setting in "Ring Volume"
Voice Calls	Silent	Vibe Pulse	In accord with the setting in "Voice Calls"
Video Calls	Silent	Vibe Dot Dash	In accord with the setting in "Video Calls"
Mail	Silent	Vibe Dot Dot	In accord with the setting in "Mail"
Voicemail	Silent	Vibe Dot Dot	In accord with the setting in "Voicemail"
Message R	Silent	Vibe Dot Dot	In accord with the setting in "Message R"
Message F	Silent	Vibe Dot Dot	In accord with the setting in "Message F"
Calendar Alarm	Silent	Vibe Dot	In accord with the setting in "Calendar Alarm"
Data Calls	Silent	Vibe Dash	In accord with the setting in "Data Calls"
File Transfer	Silent	Vibe Dot Dash	In accord with the setting in "File Transfer"
Chat Mail	Silent	Vibe Dot Dot	In accord with the setting in "Chat Mail"
Ringer IDs	Off	Off	In accord with the setting in "Ringer IDs"
Key Volume	0	0	In accord with the setting in "Key Volume"
Reminders	Off	Off	In accord with the setting in "Reminders"
Low Battery Alert	-	-	In accord with the settings in "Low Battery Alert"
Mic Sensitivity	-	-	In accord with the settings in "Mic Sensitivity"

*: Indicates the items in "Original Manner Detail".

Setting Actions in Original Manner Mode

	Ring Volume: 0 Voice Calls: 05.Solar Video Calls: 19.Bells Mail: 21.Triads
	Voicemail: 08.Fusion Message R: 20.Standard Message F: 20.Standard
fault	Calendar Alarm: 19.Bells Data Calls: 20.Standard File Transfer: Silent
	Chat Mail: 20.Standard Ringer IDs: Off Key Volume: 0 Reminders: Off
	Low Battery Alert: Off Microphone Sensitivity: Off

You can change the actions of Original Manner Mode.

• Set "Mode" to "Original Manner Mode" in advance.

● ► 🔐 (Settings) ► "Personalize" ► "Manner Mode" ► "Original Manner Detail"

Original Manner Detail Ring Volume: 0 Voice Calls: 05.Solar Video Calls: 19.Bells Mail: 21.Triads Voicemail: 08.Fusion Message R: 20.Standard Message F: 20.Standard Original Manner

Detail screen

Mode

2

Def

Perform the following operations

Ring Volume

The volume can be adjusted in 8 levels from 0 to 7.

Use ()/Dial Keys to adjust the volume

Voice Calls

Change the ringtone/vibration pattern for an incoming voice call.

i-motion :	Select from videos/i-motion movies saved in the "i-motion" folder. ♦ Select the folder ♦ ● ♦ Select a video/i-motion movie ♦ ●
Melody	 Select from melodies saved in the "Melody" folder. ♦ Select the folder ♦ ● Select a melody ♦ ●
Voice Notes	Select from sounds saved in the "Voice Note" folder. ♦ "Voice Notes (All)"/"My Notes" ♦ Select a found ♦ ●
Vibration Pattern:	Select from 5 types of vibration patterns. →P116 ◆ Select a vibration pattern ◆ ▲ [Select]
Silent :	Set to not sound or not vibrate a ringtone.

Video Calls

Change the ringtone/vibration pattern for an incoming video call. For operations, see "Voice Calls".

Mail

Change the ringtone/vibration pattern for incoming i-mode mail or SMS. For operations, see "Voice Calls".

Voicemail

Change the ringtone/vibration pattern when a message is recorded in Voicemail service. For operations, see "Voice Mail".

Message R

Change the ringtone/vibration pattern for incoming MessageR. For operations, see "Voice Calls".

Message F

Change the ringtone/vibration pattern for incoming MessageF. For operations, see "Voice Calls".

Calendar Alarm

Change the ringtone/vibration pattern to be used for the time in Reminder of Event/Task. For operations, see "Voice Calls".

Data Calls

Change the ringtone/vibration pattern for incoming data. For operations, see "Voice Calls".

File Transfer

Change the ringtone/vibration pattern when a file is received via Bluetooth communication. For operations, see "Voice Calls".

Chat Mail

Change the ringtone/vibration pattern for incoming chat mail. For operations, see "Voice Calls".

Ringer IDs

Set whether to sound the ringtone saved in a Phonebook entry.

"On"/"Off"

Key Volume

Adjust the volume of the keypad sound. The volume can be adjusted in 8 levels from 0 to 7.

♦ Use ()/Dial Keys to adjust the volume ♦ I [OK]

Reminders

Set to sound beeps or to vibrate the handset every 5 minutes to remind you of the open Record Message notification screen or missed call notification screen.

- Beep : Sound the beep tone.
- Vibrate : Vibrate the handset.
- Off : Take no action.

Low Battery Alert

Set whether to sound the Low battery alert when the battery level becomes low.

"On"/"Off"

Mic Sensitivity

Set whether to increase the microphone sensitivity so that the other party can hear a low voice better.

"On"/"Off"

Note

- · The set ringtone is displayed as its file name.
- The following file formats can be set for the ringtone/alert (but some files such as restricted files or files including only
 movies or sounds may not be set): SMF, MFi, MP4 (Mobile MP4), and AMR.
- · You cannot set a video/i-motion movie to "Voicemail", "Data Calls", "File Transfer", and "Chat Mail".
- If you set the "Ringtone volume" to other than 0, the vibrator operates and the ringtone is heard.

Reminders

· When a message is recorded in Record Message, Reminders stay activated until the message is played.

Wallpaper

Changing the Display of the Wallpaper

Default Picture: 66.Liquid Layout: Fit-to-screen Calendar: Off

● ► 🔐 (Settings) ► "Personalize" ► "Wallpaper" ► Perform the following operations

Picture

Change the image to be displayed on the Wallpaper screen.

My Pictures : Select from images saved in the "My Pictures" folder. ♦ Select the folder ♦ ● ♦ Select an image ♦ ●

None : Set to not display an image.

Layout

Adjust the position of the image set in "Picture".

Center : Place the image at the center of the screen.

Tile : Tile the image.

Fit-to-screen : Enlarge/shrink the image to fit to the screen.

Calendar

Set whether to display a Calendar on the Wallpaper screen.

"Off"/"On"

Note

• If you perform key operations when the Display is blank or the Screen Saver is displayed, the typed contents such as numeric characters will not be entered on the screen.

Picture

- The set image is displayed as its file name.
- For pre-installed wallpaper, see "Default Settings". →P325
- When an i-appli stand-by screen is set, the i-appli stand-by screen takes precedence. →P217
- The following file formats can be set (but some files such as restricted files may not be set): JPEG, GIF (including animation GIF)
- An image larger or smaller than the Wallpaper screen size (240 x 320 dots) will be displayed reduced or enlarged.
- If an animation GIF is set, the animation is not played.

Layout

• If the image exceeding the display size is set, the image will not be tiled even if you set "Tile".

Calendar

The Calendar for the Wallpaper screen cannot switch to the previous or next month. In addition, Holidays are not indicated.

Main Mei	าน
Chan	ging the Appearance of Main Menu
Default	View: Icons Reorder: (From the top of the list), i-mode, i-appli, Mail, Phonebook, Databox, Accessories, Connection, Network Services, and Settings
	change Main Menu items to be displayed as Icons or in a list. You an also change r of items.
) ♦ 🙀 (Settings) ♦ "Personalize" ♦ "Main Menu" ♦ Perform

the following operations



Reorder

Select a function ♦ ▲ [Grab] ♦ Use ② to insert the function to a new position ♦ ▲ [Insert] ♦ in [Complete]

Skin

Setting a Skin

Default Scorpio

You can change the screen design of the FOMA handset.

- The screens/functions that the designs are changed are as follows.
 - Wallpaper screen Main Menu Function Menu
 - Notification screen Message screens Charging/Charging completion screen
 - Dialing/Incoming call screen Voice call/Video call screen
 - Screens displayed from Main Menus of other than "i-mode" and "Mail"*
 - *: Setting screens, File list/Playback screens, Voice note screen, Still image/Video capturing screens



Note

- For the i-mode, mail, or i-Channel application screen, or for the i-appli execution screen, only the top and the bottom sections of the screen will be displayed in the set design.
- If you change the settings of this function, the following settings will be changed automatically.
 - "Picture" of "Wallpaper" will be changed to the image of each theme (P326)
 - "Layout" of "Wallpaper" will be changed to "Fit-to-screen".
- If you want to change the image on the Wallpaper screen and set it back to the image of each theme after changing the Skin, reset this function.

Greeting

Displaying a Wake-up Message

You can display a greeting after the Wake-up screen opens when you turn the handset power on.

● ► 🔐 (Settings) ► "Personalize" ► "Greeting" ► Enter a message

• Up to 32 full-pitch/half-pitch characters can be entered.

Note

· The greeting message appears for approximately 2 seconds after the Wake-up screen opens.

122

Screen Save

Starting a Screen Saver

Default Picture: None Delay: 1 minute

You can set to start a screen saver if no operation is performed for a specific time.



● ► 🔐 (Settings) ► "Personalize" ► "Screen Saver" ► Perform the following operations

Picture

Save the screen saver image, etc.

My Pictures	: Select from images saved in the "My Pictures" folder.
	♦ Select the folder $♦$ $●$ $♦$ Select an image $♦$ $●$
i-motion	 Select from videos/i-motion movies saved in the "i-motion" folder. ♦ Select the folder ♦ ● ♦ Select a video/i-motion movie ♦ ●
Animations	 Select from Flash movies saved in the "Animations" folder. ♦ Select a folder ♦ ● ♦ Select a Flash movie ♦ ●
None	: Set to not display a screen saver.

Delay

Set the duration before the screen saver starts.

Select a time 🕨 🖃 [Select]

· If you select "Off", the screen saver does not start.

Note

- · When a video/i-motion movie is specified, the video is played only for 1 minute when the screen saver starts.
- · This function does not work if:
 - The FOMA handset is closed
 - When the Alarm Clock is activated

Picture

- The set image, video/i-motion movie or animation is displayed as its file name.
- The following file formats can be set (but some files such as restricted files or files including only movies or sounds may not be set): JPEG, GIF (including animation GIF), MP4 (Mobile MP4), and Flash.
- If sound is included in the set file, the sound is played when the screen saver starts. However, when Manner Mode or Public Mode (Drive Mode) is activated, the sound does not be played.

Delay

• If this option is set to a longer duration than the duration set in "Display Timeout" the screen saver will not start. However, the screen saver starts while charging.

Ring Lights

Setting Ring Lights

Default Nocturne

You can set the Illumination Indicator to blink when a call arrives.



● ♦ 🙀 (Settings) ♦ "Sound Profiles" ♦ "Ring Lights" ♦ Select a blinking color ♦ 🖅 [Select]

- · The illumination indicator blinks in the selected color.
- When "None" is set, the Illumination Indicator does not blink.

Setting Event Lights

Default Off

You can set the Illumination Indicator to blink when a mail arrives or an event such as Alarm sounding starts.

● ► W (Settings) ► "Sound Profiles" ► "Event Lights" ► "On"/ "Off"

Note

- The Illumination Indicator blinks when:
 - A message of Voicemail service or Record Message is recorded.
 - Email or Message R/F is received
 - An alarm time comes
 - A set time for a reminder of a Schedule event/Task comes
 - A Bluetooth device is connected/disconnected
 - Data exchange via Infrared is in progress
- The illumination indicator blinks blue for Bluetooth communication, red for infrared communication, and light blue for
 other cases.

Date and Time

Displaying Date & Time on the Talking Screen

Default Show Date: On Show Time: On

You can set whether to display the date and time on the Voice Call screen.

● ▶ ₩ (Settings) ▶ "In-Call Setup" ▶ "Date and Time" ▶ "Show Date"/"Show Time" ▶ "On"/"Off"

Home Screen

Setting the Clock Format

Default Clock: Digital Date: On Layout: Center

You can change the appearance of the clock on the Wallpaper screen, or set whether to display the date. You can also specify the position of the clock.

● ▶ ₩ (Settings) ▶ "Personalize" ▶ "Home Screen" ▶ Perform the following operations

Clock

Digital : A digital clock is displayed.

Analog : An analog clock is displayed.

Off : A clock is not displayed.

Date

Set whether to display the date.

"Off"/"On"

"Left Justified"/"Centered"

Note

Clock

- · This option will appear when "Telop display" of i-Channel is set to "Off".
- · You cannot change the setting when "Calendar" in "Wallpaper" is set to "On". When the clock is set to "Analog", if you set "Calendar" in "Wallpaper" to "On", the clock on the Wallpaper screen automatically becomes digital.

Display Timeout

Setting Time Duration Until Display is Turned Off

Default 2 minutes

You can set to turn off the Display to save power if no operation is performed for the duration of set time.

(•) 🕨 🏭 (Settings) 🕈 "General Settings" 🕈 "Display Timeout" 🕈 Select a time duration before the Display is turned off 🕨 👍 [Select]

· The Display is not turned off if you select "Off".

Note

· While charging, this function does not work even after the set time elapses.

Backlight Setting the Backlight Lighting Duration

Default 10 seconds

You can set to turn off the keypad light (boarders of each key) and Display backlight to save power if no operation is performed for a set time.

 After the set time elapses, the keypad light is turned off first, and the backlight is turned off approximately 10 seconds later.

III (Settings) I "General Settings" I Backlight" Select a time duration before the backlight is turned off \blacktriangleright [---] [Select]

- · If you select "Off", the keypad light and the backlight remain turned off.
- · If you select "Continuous", the keypad light and the backlight remain turned on.

Note

· Even if "Continuous" is set, the Display is turned off after the time set in "Display Timeout" elapses.

Scroll

Setting Scrolling of the Screen

You can set the movement of the cursor on the screen with listed items such as Function menu.

(●) ♦ 🔐 (Settings) ♦ "General Settings" ♦ "Scroll" ♦ Perform the following operations

Up/Down

The cursor does not move when (3) is pressed if the cursor is at the top item, or when (3) is pressed if the cursor is at the bottom item.

Wrap Around

Moves the cursor to the bottom or top when (5) is pressed if the cursor is at the top/bottom item.

Text Marquee

Setting the Text Marguee Speed

Default Slow

The FOMA handset scrolls a partially hidden name such as Function menu item. You can set the scrolling speed.



🗩 🕨 (Settings) 🕈 "General Settings" 🕈 "Text Marquee" Select a scroll speed

When an item is selected, the item name is scrolled at the selected speed.

· The item name does not scroll when it is highlighted if you select "Off".

Brightness

Adjusting the Display Brightness

Default 3

You can set the brightness of the Display in 7 levels from 0 to 6.

Image: /Dial Keys to adjust the brightness

Charging Lights

Lighting the Charging Indicator While Charging

Default On

You can set whether to light the Charging Indicator while charging the FOMA handset.

•) • 🔐 (Settings) • "General Settings" • "Charging Lights" • "On"/"Off"

Security Settings

Passwords Passwords 128 Changing Passwords...... <New Passwords> 130 Setting UIM PIN <UIM PIN/UIM PIN2> 130 Unlocking a Locked UIM 131 **Restricting the Handset Operations** Locking Function 131 Locking the Handset to Prevent Use by Others...... < Phone Lock> 131 Disabling Making/Receiving Calls/Messages <Self Mode> 132 Disabling Phonebook or Datebook Viewing...... <Lock Application> 133 135

Preventing Sidekey Operations...... <Sidekey Lock>

Restricting a Call/Mail/Data Transfer

Viewing Information Set as Secret <secret data=""></secret>	13
Rejecting Calls from a Specified Number	13
Rejecting a Call without Caller ID <call rejection=""></call>	13
Muting the Ringtone of Calls from Parties Not Saved in Contacts	
<ring delay=""></ring>	138
Rejecting Calls from Other Parties Not Saved in the Phonebook	
<not in="" phonebook=""></not>	13

Other	"Security	Settings"
-------	-----------	-----------

Other Security Settings	139
-------------------------	-----

136

Passwords

Some functions of the FOMA handset require a password. In addition to the Security Code, there are the Network Security Code and the i-mode Password. These passwords help you utilize your handset.

Warning about Passwords

- Avoid setting a password using your birthday, a part of your phone number, your address or room number. 1111 or 1234, that can be easily guessed by others. Be sure to write down the set passwords and store them in a separate location.
- Do not reveal your passwords to others. DoCoMo is not responsible for damage caused by misuse of your security codes by others.
- DoCoMo will never ask you for your passwords.
- If you forget your passwords, you need to bring an ID (driver's license, etc.), the handset and the UIM to a service counter such as DoCoMo shop. For details, contact a "DoCoMo Information Center" on the back of this manual.

Security Code

The Security Code is a 6-digit number. The Security Code is set to "000000" by default, however, you can change the code by yourself. \rightarrow P130

If the Security Code entry screen opens, enter the 6-digit Security Code and press 4



The entered Security Code is marked as "★" on the screen. The numbers actually entered will not be • displayed.

Unlock Code

The Unlock Code is a 4-digit number The Unlock Code is set to "0000" by default, however, you can change the code by yourself. →P130

If the Unlock code entry screen opens, enter the 4-digit unlock code and press [+][OK].



 The entered unlock code is marked as "★" on the screen. The numbers actually entered will not be displayed.

Network Security Code

The Network Security Code is a 4-digit number that is required to access procedures and to use network services and is set to the number you selected at subscription. You can change the code by yourself. If you have "DoCoMo ID/Password" for "My DoCoMo", the comprehensive support site for PCs, you can change the Network Security Code by visiting the web site from your PC. You can change the Network Security Code by yourself by accessing "各種手続き (Procedures)" on ドコモeサイト (DoCoMo e-site) using i-mode.

 For information on accessing "My DoCoMo" and the "ドコモeサイト (DoCoMo e-site)", see the back of this manual.

Passwords

i-mode Password

The 4-digit i-mode Password is required to assign or delete function to/from My Menu, subscribe to or cancel Message Services or fee-based i-mode services.

(Some other information service providers may set passwords for their sites) The i-mode Password is set to "0000" by default, however, you can change it by yourself. Access "iMenu" \rightarrow "ENGLISH" \rightarrow "Options" \rightarrow "Change i-mode Password" if you use i-mode.

UIM PIN/UIM PIN2

You can assign 2 PIN numbers to the UIM, UIM PIN and UIM PIN2. These codes are set to "0000" by default, however, you can change them by yourself. \rightarrow P130

The UIM PIN is a 4- to 8-digit number (code) required to identify the user every time the UIM is inserted into the handset or the handset power is turned on in order to prevent unauthorized use. The UIM PIN entry is required to make or receive calls, and operate the handset.

The UIM PIN2 is a 4- to 8-digit number used to reset outgoing call charges, incoming call charges (if any) and the total of both, to reset total call charges, to set the maximum limit for call charges, to set the currency, or to use or apply for User certificates.


If the UIM PIN/UIM PIN2 entry screen opens, enter the 4- to 8-digit UIM PIN/UIM PIN2 and press 📕 [OK].

- The entered UIM PIN/UIM PIN2 is marked as "★" on the screen. The numbers actually entered will not be displayed.
- Use the UIM PIN and UIM PIN2 you set previously if you purchase a new handset but keep the same UIM.

PIN Unlock Code

The PIN Unlock Code is an 8-digit number to unlock the UIM PIN or UIM PIN2. \rightarrow P131 You cannot change it.

• The handset will be locked completely if an incorrect PIN Unlock Code is entered 10 times in a row.

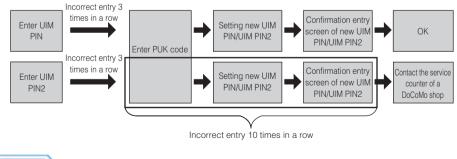

Note

• If you turn on the FOMA handset with the UIM PIN locked, "Valid UIM Not Found Some actions may not be allowed without a valid UIM card." is displayed.

Enter UIM PIN:



Changing Passwords

Default Unlock Code(4 digit): 0000 Security Code(6 digit): 000000

You can change the Unlock Code or Security Code by yourself.

2 "Unlock Code (4 digit)"/"Security Code (6 digit)" Enter the current Unlock Code/Security Code

The new Unlock Code entry screen / new Security Code entry screen opens.

- **3** Enter the new Unlock Code (4 digit)/Security Code (6 digit) The new Unlock Code reentry screen / new Security Code reentry screen opens.

Δ

Reenter the Unlock Code/Security Code entered in Step 3

UIM PIN/UIM PIN2

Setting UIM PIN

Default UIM PIN: - UIM PIN2: On

You can set to require the UIM PIN/UIM PIN2.

You cannot change UIM PIN2.

The default setting of the UIM PIN varies depending on the data saved in the UIM.

● ► 🙀 (Settings) ► "Security" ► Enter the Security Code ► "UIM PIN"/"UIM PIN2" ► "On"/"Off" ► Enter UIM PIN/UIM PIN2

Changing UIM PIN/UIM PIN2

Default UIM PIN: 0000 UIM PIN2: 0000

• Set "UIM PIN" to "On" before changing the UIM PIN.

- ► 🔐 (Settings) ► "Security" ► Enter the Security Code ► "New Passwords"
- 2 "UIM PIN"/"UIM PIN2" ► Enter the current UIM PIN/UIM PIN2 The new UIM PIN/UIM PIN2 entry screen opens.
- 3 Enter the new UIM PIN/UIM PIN2 (4- to 8-digit) The new UIM PIN/UIM PIN2 reentry screen opens.
- A Reenter the UIM PIN/UIM PIN2 entered in Step 3

Unlocking a Locked UIN

Unlocking a Locked UIM

If you enter an incorrect UIM PIN/UIM PIN2 three times in a row and the PIN lock screen opens, enter the PIN unblock code to cancel the lock.

- The PIN Unlock code is written on the FOMA subscription application form (customer's copy).
- You need to set new UIM PIN/UIM PIN2 after unlocking UIM PIN.

The new UIM PIN/UIM PIN2 entry screen opens.

9 Enter the new UIM PIN/UIM PIN2 (4- to 8-digit)

The reentry screen for confirmation screen opens.

Reenter the UIM PIN/UIM PIN2 entered in Step 2

Locking Function

Lock Option	Description	Reference
Phone Lock	Lock the handset to prevent unauthorized use. You can set to lock the handset when the handset power is turned on.	P131
Self Mode	elf Mode You can disable all communication functions including calls, Email, or i-mode. You can set to display a confirmation screen whether to set Self Mode when the handset power is turned on.	
Lock Application	You can specify function to lock.	P133
Dialing Restriction	You can disable the Dial Keys not to allow others to make or send unauthorized calls or Email.	P135
Sidekey Lock	Lock the Sidekey to prevent improper operations even if the Sidekey is pressed accidentally when you keep the closed FOMA handset in a bag.	P136
Secret Data	Set Phonebook entries or Schedule events/tasks to Secret so they will not be seen by others.	P136
Call Rejection	Reject calls from specified callers saved in the Phonebook or calls without caller ID.	P136
Ring Delay	Delay incoming call actions when a call from a caller not saved in the Phonebook or a call without Caller ID arrives.	P138
Not in Phonebook	Reject a call from a caller not saved in the Phonebook.	P138

Phone Lock

Locking the Handset to Prevent Use by Others

You can lock your handset and disable it until the Unlock Code is entered. There are 2 ways to activate Phone Lock: the handset is locked immediately and the handset is automatically locked when the power is turned on.

• When Phone Lock is activated, you cannot perform operations other than to power On/Off and cancel Phone Lock.

Locking the Phone Immediately

● ► 🔐 (Settings) ► "Security" ► Enter the Security Code ► "Phone Lock"



"Lock Now" Enter the Unlock Code

The Phone Lock screen opens and Phone Lock is activated.

• When Phone Lock is set, the Unlock Code entry screen opens.

Activating Phone Lock at Power Up

Default Off

The Phone Lock screen (P132) ◆ "Automatic Lock" ◆ "On"/"Off" ◆ Enter the Unlock Code

Automatic Lock is set.

· The Automatic Lock setting completes if you select "Off".

Note

- When Phone Lock is set, the Incoming screen does not open when a call arrives, instead the incoming call is
 indicated by the ringtone or vibration set under Profile. When "Ring Lights" is set to other than "None", the Illumination
 Indicator blinks for incoming calls. No incoming call actions of ringtone or vibration are taken when:
 - "Profile" is set to "Silent"
 - Public Mode (Drive Mode) is activated
 - Manner Mode is activated to "Silent"
 - Manner Mode is activated to "Original Manner Mode" (and each ringtone is set to "Silent")
- To answer a call while Phone Lock is set, enter the Unlock Code to cancel Phone Lock first.

To cancel Phone Lock

Enter the Unlock Code.

• If an incorrect Unlock Code is entered 5 times in a row, the FOMA handset is automatically turned off. If you turn the power on and enter the correct Unlock Code, Phone Lock will be canceled.

Self Mode

Disabling Making/Receiving Calls/Messages

Default Self Mode: Off Prompt At Power Up: Off

You can stop sending/receiving radio waves and disable all communication functions such as call, Email, i-mode, packet communication, 64K data communication, Bluetooth communication and Infrared communication.



● ► 🔐 (Settings) ► "Self Mode" ► Perform the following operations

"Off"/"On"

Prompt At Power Up

Set to display a confirmation screen whether to set Self Mode when the handset power is turned on.

"Off"/"On"

Note

- self appears at the top of the screen when Self Mode is set. And, "Self Mode is On" appears on the Wallpaper screen
- You can also set/release Self Mode by pressing (if 1+ seconds) and [] [Yes] on the Wallpaper screen.
- Self Mode cannot be set while using some other functions such as a voice call or starting "Infrared Link".
- · Mail or Message R/F arrived when Self Mode is set to "On" is stored at the i-mode Center.

Lock Application

Disabling Phonebook or Datebook Viewing

Default Off

You can lock function specified in "Lock Application Setup", disable use unless the Unlock Code is entered and restrict the use.

If the security is a security is a security of the security "Lock Application" Enter the Unlock Code

Note

- Appears at the top of the screen when Lock Application is set. However, the icons are not displayed when: - No function has been disabled using "Lock Application"
 - Alarm or Reminder for Schedule event/task has been saved
 - "Dialing Restriction" is set to "On"
- When "Recent Calls" under "Lock Application Setup" is selected and set this function to "On" removes the display of Dialed Calls and Received Calls.

Selecting Functions to be Disabled with Lock Application

Default No applications are selected

You can specify the function to be locked when "Lock Application" is set.

•) • 🔐 (Settings) • "Security" • Enter the Security Code "Lock Application Setup" the Unlock Code



Checkmark to a function to lock **b i**

Checkmark to a function to lock, press (in [Complete].

- Note
- On the Lock Application screen, applications proceeded with "-" are sub-applications under "Accessories" or "Settings". For example, if you place a check mark to "Accessories", all related applications will be checkmarked.
- The same functions and different lock methods such as "Phonebook (Lock)" and "Phonebook (View Only)" can be checkmarked only one of them.
- The following operations can be performed by pressing 上 [Function] on the Lock Application Setup screen:
 - Select "Select All" to select all functions.
 - Select "Unselect All" to cancel all selections.
- Even if you select an alarm or Schedule event and set "Lock Application" to "On", the notification screen opens and the alarm sounds at the set time of the registered contents.
- Even when "Lock Application" is set to "On" after specifying "Personalize" or "In-Call Setup" to lock, "Wallpaper", "Skin", "Screen Saver", and "Alternate Image" will not revert to the default.

Actions of each application is checkmarked and "Lock Applications" is Set to "On"

Locked Application		Description
i-mode		 i-mode, mail, and i-Channel become unavailable. Mail will not be received but stored at the i-mode Center/SMS Center. The unlock code is required when "i-appli" is selected.
Phonebook (Lock)		 The Unlock Code is required to view the Phonebook or to access the Phonebook from another application. The name of the caller saved in the Phonebook will not appear. The image and ringtone saved in the Phonebook will not be displayed or played.
Phonebook (View Only)		The Unlock Code is required to save/edit/setup/delete a Phonebook entry or to access the Phonebook from another application.
Databox		 The Unlock Code is required to view the Databox or to access the Databox from another application. The Unlock Code is required to start the Camera, Video camera or Voice Notes.
Accessories		 The Unlock Code is required when for (Accessories) is selected. The handset behaves in the same manner as it does when all items other than "Edit Alarm" are selected (when all items are selected, the Unlock Code entry screen does not open).
	- Alarm Clock (Lock)	 The Unlock Code is required to access the "Alarm Clock". Unless you enter the Unlock Code after pressing Image: Code after pressing
	- Alarm Clock (View Only)	The Unlock Code is required to save/edit/setup/delete an alarm.
	- Datebook	 The Unlock Code is required to access the "Datebook". Unless you enter the Unlock Code after pressing <u>h</u> [View] on the Datebook notification screen, the detail screen cannot be displayed (A datebook entry saved after setting "Lock Application" to "On" acts normally).
	- Record Message	 The Unlock Code is required to access "Record Message". When a Voice Note is recorded, unless you enter the Unlock Code, the Voice Note notification screen is not displayed.
	- Calculator	The Unlock Code is required to access the "Calculator".
	- World Clock	The Unlock Code is required to access "World Clock".

Locked Application		Description
Accessories		
	- Recent Calls	 A call log entry will be deleted automatically (Calls dialed or received after setting "Lock Application" to "On" are recorded in a call log). The Unlock Code is required to view the call logs or to access the call logs from another application. The Unlock Code is required to access "Recent Calls".
Settings		The Unlock Code is required when 🔐 (Settings) is selected.
	- Sound Profiles	 The Unlock Code is required to access "Sound Profiles". You cannot change the "Profile" by pressing 1/- when the FOMA handset is closed.
	- Personalize	The Unlock Code is required to "Personalize" settings.
	- General Settings	The Unlock Code is required to access "General Settings".
	- In-Call Setup	The Unlock Code is required to access "In-Call Setup".
	- Network	The Unlock Code is required to access "Network" settings.
	- Headset	The Unlock Code is required to access the "Headset".
	- Phone Status	The Unlock Code is required to access the "Phone Status" or to access My Personal Information from another application.

Dialing Restriction

Restricting Dialing

Default Off

You can restrict making calls by pressing the Dial Keys and only allow calls made from Contacts.

● ▶ 🙀 (Settings) ▶ "Security" ▶ Enter the Security Code ▶ "Dialing Restriction" ▶ "On"/"Off"

Note

- Dear appears at the top of the screen when Dialing Restriction is set. However, when an alarm or Reminder for Schedule event/task is saved, the icon will not be displayed.
- At the time when this function is set, call log entries will automatically be deleted. Calls made or received after that time will be recorded in call logs, and calls can be made from Dialed Calls.
- When this function is set to "On",
 - You cannot save or edit a Phonebook entry or directly enter a mail address.
 - Emergency calls can be made by dialing a emergency number (110, 118 or 119).
 - If a phone number in a Phonebook entry contains "n", a call cannot be made.
 - When you connect the FOMA handset to a PC or the like, you may be able to dial to a phone number that is not registered.

Preventing Sidekey Operations

Default Off

You can lock the Sidekeys $(1/\sqrt{1})/\sqrt{1}$ of the handset when your handset is closed.



🗩 🕨 (Settings) 🕈 "Security" 🕈 Enter the Security Code 🕨 "Sidekey Lock" "On"/"Off"

- Note
- Pressing
 (for 1+ seconds) when the FOMA handset is closed locks/unlocks the Sidekey lock.

Checking the Shortcut Operation of the Sidekey Lock

You can check the operation to unlock the Sidekey Lock when the FOMA handset is closed.



(●) ♦ 🔐 (Settings) ♦ "Security" ♦ Enter the Security Code ♦ "Sidekey Shortcut"

The shortcut explanation screen opens.

Secret Data

Viewing Information Set as Secret

Default Hide

You can set to whether to view a hidden Contact/Schedule event/task set as Secret by setting Secret Data.



●) ♦ ₩ (Settings) ♦ "Security" ♦ Enter the Security Code ♦

Note

🛃 appears at the top of the screen when Secret Data is set to "Show". By pressing 🐨 and 📥 [OK] on the Wallpaper screen while setting to "Show", you can set Secret Data to "Hide".

Rejecting Calls from a Specified Number

You can set to reject calls from the specific parties stored in Contacts. You can set this option when storing or editing a Contact.

- This function is available only when the caller sends Caller ID.
- It is recommended that you set the Caller ID Request service concurrently.

Create Contact screen (P93)/Edit Contacts screen ♦ "Reject" ♦ "Yes"/"No" ♦ 🚛 [Complete]

Storing/editing a Contact completes.

Note


- The handset does not start incoming call actions for a rejected incoming call, and the call is recorded in Missed Calls. The caller hears a busy tone.
- i-mode mail and SMS are received regardless of rejection settings.
- Even when a checkmark is placed next to "Phonebook (Lock)" or "Phonebook (View Only)" in "Lock Application Setup" and "Lock Application" is set to "On", this function works if a call arrives from a caller whose calls are to be rejected.

Call Rejection

Rejecting a Call without Caller ID

Default Public Phones: Accept Private ID: Accept Unknown ID: Accept

You can set whether to accept or reject calls without Caller ID depending on the reason for no Caller ID.





Call Rejection screen

9 Perform the following operations

Public Phones

Set an option for calls made from public phones.

"Accept"/"Reject"

Private ID

Set an option for calls made without the Caller ID because the caller chose not to send Caller ID.

"Accept"/"Reject"

Unknown ID

Set an option for calls made from overseas or from a fixed line phone via forwarding services, from which Caller ID cannot be sent. (Caller ID may be sent depending on the carrier.)

"Accept"/"Reject"

Note

- The handset does not start incoming call actions for a rejected incoming call, and the call is recorded in Missed Calls. The other party hears a busy signal.
- Calls are rejected even when the Voicemail or Call Forwarding service is activated. However, if Ringing Time is set to 0 second, each network service starts.
- i-mode mail and SMS are received regardless of rejection settings.
- "Not in the Phonebook" →P138

Private ID

• If a call with "Private ID" arrives when the Caller ID Request service is activated, the caller hears a voice guidance requesting Caller ID be sent.

Ring Delay

Muting the Ringtone of Calls from Parties Not Saved in Contacts

Default Ring Delay: 0 seconds

You can set not to start ring action such as sounding a ringtone when a call arrives from other parties not saved in Contacts or without Caller ID. This option is convenient to prevent nuisance calls such as "1 ring calls" that disconnect after a short ringing time.

● ► 🔐 (Settings) ► "In-Call Setup" ► "Ring Delay" ► Perform the following operations

Ring Delay

Set an interval from when a call arrives until the ring action starts.

- Use ()/Dial Keys to enter the time
- Set this option to 0 (zero) seconds to cancel Ring Delay.

Show in Call Logs

Set whether to show the Missed Calls for the call that was terminated within the time specified in "Ring Delay".

"On"/"Off"

Note

- When a call arrives from a relevant caller while this function is activated, the incoming call actions, such as sounding the ringtone, will not be taken for the set time, however, the incoming screen opens.
- When "Not in Phonebook" is set to "Reject", this function will not work even if a call arrives from a caller not stored in the Phonebook. Also, when "Private" in "Call Rejection" is set to "Reject" or the Caller ID Request is activated, this function will not work even if a call arrives from a caller without Caller ID.
- When "Secret Data" is set to "Hide", even if a call arrives from a caller whose Phonebook entry is set as secret, this
 option works.

Ring Delay

- If the Ring Delay is set longer than the ring time for the Voicemail or Call Forwarding service, each network service starts before the ring action starts.
- If the Ring Delay is set longer than the response time of "Record Message", the Record Message starts without the ring action.

Not in Phonebook

Rejecting Calls from Other Parties Not Saved in the Phonebook

Default Accept

You can set to reject calls from other parties not saved in Contacts.

- This function is available only when the other party sends Caller ID.
- It is recommended that you set the Caller ID Request service and "Call Rejection" concurrently.

● 🕨 (Settings) 🕈 "In-Call Setup" 🕈 "Call Rejection" Enter the Unlock Code



"Not in Phonebook" "Accept"/"Reject"

Note

7

- · The handset does not start incoming call actions for a rejected incoming call, and the call is recorded in Missed Calls. The other party hears a busy signal.
- · Calls are rejected even when Voicemail or Call Forwarding service is activated. However, if Ringing Time is set to 0 second, each network service starts.
- · i-mode mail or SMS is received regardless of rejection settings.

Other Security Settings

In addition to the security functions described in this chapter, the following functions and services are available.

Purpose	Function/Service	Reference
To upload or check safety messages using i-mode in case of disaster.	"i-mode Disaster Message Board Service" service	For details, refer to "Mobile
To change Email address	Change Mail Address	Phone User's Guide
View an Email address if you forget it	Confirm Mail Address	[i-mode]".
To receive/reject mail from a specified domain	Spam Mail Prevention	
To receive/reject Email via i-mode only	(Reject/Receive Mail Settings)	
To receive/reject mail from a specified address		
Want to reject SMS	Spam Mail Prevention (SMS Rejection Settings)	
To reject incoming i-mode mail in excess of 200 a day from an i-mode phone	Restrict i-mode Spam	
To reject unsolicited mail	Reject Unsolicited Ad Mail	
To check the Email setting status	Confirm Settings	
To restrict incoming Email size	Limit Mail Size	
To temporarily disable mail functions	Suspend Mail	
To use an Electronic authentication service to perform safe and reliable data communication (for FirstPass sites only)	FirstPass	P174
To select and download Email	Receive option	P191
To register the phone number of a nuisance caller to reject calls from that number	Nuisance Call Barring service	P283
To ask a caller to show Caller ID	Caller ID Request service	P284
To update software on the handset when necessary	Software Update	P357
To protect the handset from harmful data	Scanning Function	P361

Camera

Before Using the Camera		142
Capturing Still Images	<still capture="" image=""></still>	145
Capturing Videos	<video capture=""></video>	147
Changing the Capturing Settings		148
Changing the Camera Settings	<camera setup=""></camera>	150
Barcode Reader	<barcode reader=""></barcode>	151

Before Using the Camera

Notes for Capturing Images

- The camera employs high precision technology, but some pixels or lines may seem brighter or darker than
 others. Also, when capturing in places with insufficient lighting, noise, seen as white lines, increases. This is
 normal.
- Clean the lens with a soft cloth before capturing. If the lens is stained with fingerprints or oil, the captured image may appear out of focus or blurred.
- Do not leave the handset in a warm place or under a direct sunlight for a long period. The image or video to capture may deteriorate.
- If you capture under a fluorescent light, mercury lamp or sodium lamp flickering at high speed, flickering such as stripes may appear. The color tone of still images or videos may vary depending on the capturing timing.
- Do not expose the lens to direct sunlight for a long period and do not capture at the sun or bright lamp directly. The image may become discolored or the camera may fail.
- Do not cover the lens with your fingers, hair or the handset lanyard when capturing.
- Capturing a fast moving object may result in an image slightly distorted from the image displayed on the screen at the time of capturing, or the image may be blurred.
- When the battery level is low, you may not be able to save captured still images or videos. Check the battery level before capturing.
- Captured still images or videos may differ from the actual subjects in brightness or color tone.
- If you capture/record using the In Camera, the imaged is displayed (saved) normally. To display (save) the image as a mirror image, change the "Mirror" setting of the camera to "On".
- Even in Manner Mode, the shutter tone sounds at a fixed volume. The shutter tone sounds from the Speaker even when a miniUSB Stereo Headset M01 (optional) is connected to the FOMA handset.
- · While capturing with Out Camera, the Photo Light blinks. You cannot turn off the blinking Photo Light.

Notice

The stored content may be lost due to the handset failure or repair. DoCoMo is not responsible for lost data. It is recommended that you keep saved content from the handset on a microSD memory card. You can connect the handset to a PC using Data Link Software and a FOMA USB Cable (optional) and save data to the PC.

Copyrights and Portrait Rights

You have no right to copy, modify, or distribute the contents such as text, images, music, or software downloaded from web sites on the Internet, or images captured by the cameras of this product without permission from the copyright except for when the copy or quote is for personal use that is allowed by the Copyright Law.

Note that it may be prohibited to capture or record live performances or exhibitions even for personal use. Refrain from taking portraits of other persons and uploading such portraits on websites without consent, as this violates portrait rights.

Please respect the privacy of individuals around you when capturing and sending images using a camera-equipped mobile phone.

Save Format of Still Images/Videos

	Still Image File		Video File
File Format	JPEG		MP4 (Mobile MP4)
Resolution	Out Camera	Wallpaper (240×320) VGA (480×640) 1.3M (1024×1280) 2.0M (1200×1600)	SQCIF (128×96) QCIF (176×144)
	In Camera	QCIF (176×144) CIF (352×288)	
Encoding	-		Graphics: H263 Audio: AMR-NB
File Extension	.jpg		.3gp
File Name	The year, month, date, hour and minute of the time of capture will be added automatically. Example: Captured at 10:10 on November 6, 2006 "01-11-06_1010"		
Maximum File Size	Approximately 500K bytes (estimate)		Approximately 3M bytes

Number of Savable Still Images

The number of still images that can be saved on this FOMA handset or the microSD memory card varies depending on the resolution, image quality, capturing conditions, and capture objects.

Out Camera

Resolution	Quality	Approximate Number of	of Savable Still Images*1
nesolution	Quality	M702iG (Phone):	microSD Memory Card*2
Standby (240×320)	Good	Approximately 5200	Approximately 6400
	Better	Approximately 2600	Approximately 3200
	Best	Approximately 1700	Approximately 2000
VGA (480×640)	Good	Approximately 1700	Approximately 2000
	Better	Approximately 870	Approximately 1000
	Best	Approximately 580	Approximately 680
1.3M (1024×1280)	Good	Approximately 400	Approximately 480
	Better	Approximately 200	Approximately 240
	Best	Approximately 130	Approximately 160
2.0M (1200×1600)	Good	Approximately 330	Approximately 400
	Better	Approximately 160	Approximately 200
	Best	Approximately 100	Approximately 120

*1: Up to 1000 items can be displayed on this FOMA handset.

*2: Using the 64M byte microSD memory card (optional).

In Camera

Resolution	Quality	Approximate Number of Savable Still Images*1	
Resolution		M702iG (Phone):	microSD Memory Card*2
QCIF (176×144)	Good	Approximately 10000	Approximately 13200
	Better	Approximately 5200	Approximately 6600
	Best	Approximately 3400	Approximately 4000
CIF (352×288)	Good	Approximately 5200	Approximately 6400
	Better	Approximately 2600	Approximately 3200
	Best	Approximately 1700	Approximately 2000

*1: Up to 1000 items can be displayed on this FOMA handset.

*2: Using the 64M byte microSD memory card (optional).

Video-clip Capture Duration

The table below shows approximate duration for 1 video to be saved on the FOMA handset or the microSD memory card. The video-clip capturing duration varies depending on the video length, quality, capturing conditions, and capture objects.

Resolution	Video Length	Video Quality	Record Time for Video
SQCIF	i-mode mail (small)	Good	Approximately 30 seconds
(128×96)		Better	Approximately 20 seconds
		Best	Approximately 15 seconds
	i-mode mail (large)	Good	Approximately 60 seconds
		Better	Approximately 40 seconds
		Best	Approximately 30 seconds
	Maximum	Good	Approximately 6 minutes
		Better	Approximately 4 minutes
		Best	Approximately 3 minutes
QCIF (176×144)	i-mode mail (small)	Good	Approximately 30 seconds
		Better	Approximately 20 seconds
		Best	Approximately 15 seconds
	i-mode mail (large)	Good	Approximately 60 seconds
		Better	Approximately 40 seconds
		Best	Approximately 30 seconds
	Maximum	Good	Approximately 6 minutes
		Better	Approximately 4 minutes
		Best	Approximately 3 minutes

Capturing Screen Components

The meanings of icons appearing on the Photo/ Video capture screen are as follows:






Photo capture screen

Camera mode →P145. P147

- G Camera
- 🛐 Video camera
- 2 Auto-Timed Capture → P150 Auto Timer ON

- Light Off
- Light On 4

4 Number of remaining images

Number of remaining images depends on the setting conditions for capturing.

6 Resolution →P150 (Still images), P150 (Videos)

- 240 x 320 Standby (240x320)
- 480 x 640 VGA (480x640)
- 1.3M 1.3M (1024x1280)
- 2M 2.0M (1200x1600)
- 128 x 96 SQCIF (128x96)
- 176 x144 QCIF (176x144)
- 352 x288 CIF (352x288)

6 Switch Storage Device →P151

- Phone
 - microSD

Control Key

Displays Multi-function Keys that can be operated.

- · When this icon is not displayed on the screen, press 🚯, etc to display it.
- · This icon may not be viewed clearly in places such as outdoors where the lights are strong.

8 Elapsed capturing time/Maximum capturing time

Displays the Elapsed capturing time/Maximum capturing time.

Ocapturing progress bar

Displays the elapsed capturing time with a bar.

Still Image Capture

Capturing Still Images

· Captured still images are stored in the "Camera" folder under "My Pictures" in "Databox" on the handset by default. To change the saving destination to the microSD memory card, access "Switch Storage Device" (P151).





Still image capture screen

Key operation while ready for capturing

K	Key	Description
ullet	•	Shutter
*	đ	Light On/Off (Only for capturing with the Out Camera)
?##]	Switch between the In and Out Cameras
٩		Switch settings for Zoom, Exposure and Lighting Conditions
\odot		Adjust Zoom, Exposure and Lighting Conditions

Frame a shot $(\bullet)/$

A still image is captured, and the still image capture completion screen opens.

- CIRO : A captured image will be deleted and returns to the still image capture screen.
- [Send]: Send a captured still image by Email, Infrared or Bluetooth. →P184, P254, P273


(●)**/**ŀ

Return to the still image capture screen.

Capturing with the handset closed

If the handset is closed while ready for capturing, the image to capture appears on the Sub-display. Capture while viewing the image on the Subdisplay.

- Captured still images are saved automatically.
- This function is not available when capturing a video.
- The Auto Timer is not available.



*: Hold the FOMA handset vertically when capturing so that the Out Camera comes to the top as shown in the above illustration.

Sidekey operations when the FOMA handset is closed

Key	Description
•/.	Zoom (Telescope/Panorama)
·	Shutter
	-

Note

- To delete captured still images, press and on the still image capture completion screen. Pressing and to terminate does not delete the still images.
- If no action is taken on the capture screen for 2 minutes, the camera is terminated. Captured still images are saved automatically.
- Even when Manner Mode is activated, the shutter tone sounds when capturing.
- When a call arrives while capturing, you can pause capturing to answer the call. After the call is terminated, the Capture screen returns. However, if the call lasts for 1 + minutes, the camera is terminated automatically and the captured still image is saved.
- When mail arrives, capturing is paused, and the Reception result screen opens. Capturing screen returns after the mail function is finished. However, when displaying a mail for more than approximately 1 minute, camera is finished and captured still images are saved automatically.
- A border cannot be added when a still image is being captured. Add a border to a captured still image while editing the image. →P147, P230

Function Menu on the Still Image Capture Screen

Default Light: Light Off

Still image capture screen (P145) ♦ [Function] ♦ Perform the following operations

Go to Pictures

View images saved in "Camera" in "My Pictures".

Switch

Switch to Video Mode or Barcode Reader.

"Go to Video Mode"/"Barcode Reader"

Internal View/External View

Switch between the In and Out Cameras.

Light On/Light Off

Switch the Camera light On/Off.

 You can turn on the light only when you are using the Out Camera. When turned on, the Photo Light illuminates as an auxiliary light and remains lit while the Camera is activated.

Auto-Timed Capture

Set the number of seconds from the time the shutter is pressed until the capturing is performed. \rightarrow P150

Camera Setup

Set the resolution, image quality or shutter tone.

Switch Storage Device

Set the saving destination of the image. ${\rightarrow}\mathsf{P151}$

Free Space

Open the free space on the microSD memory card and the FOMA handset.

Function Menu on the Still Image Capture Completion Screen

Still image Capture completion screen (P145) (Function) Perform the following operations

Store Only

Save a captured still image.

Discard

Delete a captured still image.

Apply As

Set the captured still image for the Wallpaper or a Contact.

Wallpaper	Set as Wallpaper.
Screen Saver	Set as Screen Saver.
Contact	Set to a Contact. Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97).
Camera Off Image	Set the file as the alternate image for video calls.

Edit

Save a captured still image and open the Image edit screen. →P230

Video Capture

•

Capturing Videos

 Captured videos are stored in the "Camera" folder under "i-motion" in "Databox" on the handset by default. To change the saving destination to the microSD memory card, access "Switch Storage Device" (P151).



Video capture screen

Key operation while ready for capturing or while capturing

Key	Description
\bullet	Start/Stop capturing
* intri	Light On/Off (Only while ready for capturing, when capturing with the Out Camera)
*#	Switch between the In and Out Cameras
٩	Switch settings for Zoom, Exposure and Lighting Conditions
\odot	Adjust Zoom, Exposure and Lighting Conditions

Frame a shot $(\bullet)/(\bullet)$

Start capturing.

- [Pause]/[Resume]: Pause/resume the capturing.
- [Cancel]: Stop capturing without saving the captured video.



Video capturing screen

•)/•

Capturing ends and the video capture completion screen opens.

- Care: A captured video will be deleted, and the Video capture screen returns.
- [Send]: Send a captured video by Email, Infrared or Bluetooth. →P184, P254, P272

Δ **(●)/**•

Return to the video capture screen.

Note

- To delete captured videos, press and the video capture completion screen. Pressing @ to terminate does not delete the videos.
- If no action is taken on the capture screen for 2 minutes, the video camera is terminated. Captured Vides are saved automatically.
- Folding the FOMA handset while capturing terminate the video camera after saving the captured videos.
- · Even when Manner Mode is activated, when capturing starts and ends, the shutter tone sounds.
- If a call arrives while capturing a video, the shutter tone sounds and capturing ends automatically. After the call is terminated, the captured video is played automatically and the capture screen returns. However, if the call lasts for 1+ minutes automatically. The captured video is saved.
- When an Email arrives while capturing a video, the shutter tone sounds, capturing ends automatically, and the Reception result screen opens. Capturing screen returns after the mail function is finished. However, when displaying a mail for more than approximately 1 minute, the video camera is terminated and captured video clips are saved automatically.
- Recording of sounds start after the shutter tone sounds

Function Menu on the Video Capture Screen

Default Light: Light Off

Video capture screen (P147) Image Im [Function] > Perform the following operations

Continued on the next page ••• 147

Go To Videos

View videos saved in "Camera" in "i-motion".

Switch

Switch to Photo Mode or Barcode Reader.

"Go to Photo Mode"/"Barcode Reader"

Internal View/External View

Switch between the In and Out Cameras.

Light On/Light Off

Switch the Camera light On/Off.

 You can turn on the light only when you are using the Out Camera. When turned on, the Photo Light illuminates as an auxiliary light and remains lit while the Video Camera is activated.

Video Camera Setup

Set the video quality, length, resolution, etc. Setting the Camera". (P150)

Switch Storage Device

Set the saving destination of the video. →P151

Free Space

Open the free space on the microSD memory card and the FOMA handset.

Function Menu on the Video Capturing Completion Screen

Video capturing completion screen (P147) ♦ → [Function] ♦ Perform the following operations

Store Only

Save a captured video.

Discard

Delete a captured video.

Preview

Play a captured video.

- O: Pause/play the video.
- \ominus: Holding the key down will fast forward/fast rewind the video.
- (): Stop the playback.

Apply As

Sets the captured video for use as a Screen Saver or Phonebook entry.

Screen Saver :	Set as the Screen Saver.
Ring Tone :	Set as a ringtone for a voice call.
Phonebook Entry:	Set to a Phonebook entry. Go to Step
	2 in "Saving Contacts to the
	Phonebook from Received Calls or
	Dialed Calls" (P97).

Edit

Save a captured video and open the Movie edit screen. $\rightarrow P236$

Changing the Capturing Settings

Set the Camera matching with the capturing conditions.

_		
10	٦O	m
~	20	

Default	Still Image/Video: 1x
---------	-----------------------

Set the image zoom ratio.

Zoom Ratio

The maximum zoom ratio for capturing a still image using the Out Camera is 8 times* and using the In Camera, twice. When capturing a video, the maximum zoom ratio is two times for both Out and In Cameras. The resolution (size) may be changed automatically and the image is saved depending on the set zoom ratio. The following table shows the resolution for each zoom ratio:

*: The maximum zoom ratio is 4 times retaining the same resolution.

Capturing with Out Camera (Still image/Video)

Resolution	Zoom Ratio			
nesolution	1×	2×	4×	8×
Standby (240×320)	240×320	240×320	240×320	120×160
VGA (480×640)	480×640	480×640	240×320	120×160
1.3M (1024×1280)	1024×1280	480×640	240×320	120×160
2.0M (1200×1600)	1200×1600	480×640	240×320	120×160
QCIF (176×144)	176×144	176×144	-	-
SQCIF (128×96)	128×96	128×96	-	-

Capturing with In Camera (Still image/Video)

Resolution	Zoom Ratio		
nesolution	1×	2×	
QCIF (176×144)	176×144	176×144	
CIF (352×288)	352×288	176×144	
SQCIF (128×96)	128×96	128×96	

Zoom ratio



Zoom setting (Example: Still image capture screen)

Setting Lighting Conditions

Default Still Image/Video: Automatic

You can adjust the coloring of the image to a natural color tone with light source in captured places.

Still image capture screen (P145)/Video capture screen (P147)/Video capturing screen (P147) ♦ Use () to adjust Lighting Conditions ♦ Use () to perform the following operations

Automatic

: Adjust automatically.

Sunny

: Suitable for capturing outdoor in sunny weather.

Cloudy

: Suitable for capturing outdoors in cloudy weather.

Indoor (Home)

: Suitable for capturing under incandescent lighting.

Indoor (Office)

- : Suitable for capturing under florescent lighting.
- Night
- : Suitable for capturing at night.

Adjusting Brightness

Default Still Image/Video: 0

Adjust the brightness (exposure) of the image. The Brightness can be set from -2 to +2.

Lighting Conditions (Example: Still

image capture screen) Items for Lighting Conditions Still image capture screen (P145)/Video capture screen (P147)/Video capturing screen (P147) ♦ Use () to adjust Exposure ♦ Use () to select a brightness correction value



Brightness correction value




Switching between the In and Out Cameras

Default Still Image/Video: Out Camera

You can switch between the In and Out Cameras according to the subject.

Still image capture screen (P145)/Video capture screen (P147)/Video capturing screen (P147)


Each press of 📰 toggles between the In and Out Cameras.



Capturing Close-up

Press the Macro Mode Switch to 💖 when capturing close to an object or using the Barcode Reader.

 The most appropriate distance between the Camera and the object is approximately 10 cm when using (Macro Mode).



 After completing the macro capturing, change the Macro Mode Switch to ▲. If the switch remains at ♥, normal images will be out of focus.

Setting the Auto Timer

Set the number of seconds from the time the shutter is pressed until the capturing is performed.

• The Auto Timer is not available for video capturing.

Still image capture screen (P145) • ____ [Function] • "Auto-Timed Capture"

"5 seconds"/"10 seconds"

S appears at the top of the screen.

Image: Cancel [Cancel]:
 Cancel the Auto
 Timer.



Set seconds

Auto-Timed capture screen

🖃 [Start]

Start the Auto Timer. A tone sounds while the Auto Timer is running, and capturing is performed after the set time.

- 👍 [Capture]: Start capturing.
- 🗔 [Cancel]: Cancel the timer.

Note

 When a call or Email arrives when the Auto Timer is activated, the Auto Timer is canceled.

Camera Setup

Changing the Camera Settings

Set the resolution, image quality, shutter tone, etc.

Setting the Camera

Resolution (Out/In Cameras): Standby (240 x 320)/CIF (352 x 288) Quality: Better Shutter Tone: Click Mirror: Off

Still image capture screen (P145) ♦ [Function] ♦ "Camera Setup" ♦ Perform the following operations

Resolution

Sets the resolution.

- Select a resolution [Select]
- For resolutions, see "Number of Savable Still Images" (P143).

Quality

Set the image quality.

Good : The lowest quality. The file size will be small.

Better: The standard quality.

Best : The highest quality. The file size will be large.

Shutter Tone

Select the tone to sound when the shutter is pressed.

Select a Shutter Tone . [Select]

Mirror

The image displayed on the screen will be reversed when using the In Camera.

"On"/"Off"

Setting Video Capturing

Default	Video Quality: Better Video Length: i-mode mail (Small) Resolution (Out/In Cameras): QCIF (176x144) Recording Sound: On Mirror: Off Shutter Tone: Click
---------	---

Video capture screen (P147) ♦ [Function] ♦ "Video Camera Setup" ♦ Perform the following operations

Video Quality

Set the image quality.

- **Good** : The lowest quality. The file size will be small, but the capturing duration is the longest.
- Better: The standard quality.
- **Best** : The highest quality. The file size will be large, but the capturing duration is the shortest.

Video Length

Limit the saving size of a captured video.

Up to approximately 290K bytes can be saved. Suitable to send as i-motion mail.
Up to approximately 490K bytes can be saved. Suitable to send as large size i-motion mail.
The file size is not limited. You can capture up to approximately 6 minutes.

Resolution

Set the resolution.

- Select a resolution
- For resolutions, See "Video Clip Capture Duration" (P144).

Recording Sound

- · Set whether to record sound when capturing videos.
- "Off"/"On"

Mirror

The image displayed on the screen will be reversed when using the In Camera.

"On"/"Off"

Shutter Tone

Select the tone to sound when the shutter is pressed.

Select a Shutter Tone

Note

Shutter Tone

 The shutter tone volume is fixed. You cannot adjust the volume or mute the tone. Also, you cannot set a downloaded melody as a Shutter Tone.

Mirror

• When "Mirror" is set to "On", the image will be saved with the right and left inverse.

Setting the Saving Destination of the captured Image/Video

Default Still Image/Video: Phone

Set the saving destination of the captured image either to the handset or the microSD memory card.

Still image capture screen (P145)/Video capture screen (P147)

"Switch Storage Device"

7 "microSD"/"Phone"

• (h) [Details] : Display the storage location of the storage destination selected.

Barcode Reader

Barcode Reader

You can scan information embedded in a JAN code or QR code using the handset camera. You can create i-mode mail or connect to the Internet using the scanned information. You can also save or play the scanned information, image or melody.

- Up to 16 split QR codes can be scanned.
- UP to 5 pieces of scanned information can be saved.

JAN codes

The JAN code is a barcode representing numbers using vertical bars in different thickness and spaces. 8-digit (JAN8) or 13-digit (JAN13) barcode can be scanned.

 The scanned result of the following JAN code is "4942857113273".



QR codes

The QR code is one of the 2 dimensional codes that expresses text including Kanji, Kana or Pictograph (E-Moji) in the vertical and horizontal patterns. Some QR codes have an image or melody embedded, and there are split QR codes where multiple images contain 1 larger piece of information.

 The scanned result of the following JAN code is "株 式会社NTTドコモ".



Scanning Codes

- Set the Macro Mode Switch of the camera to before using the Barcode Reader. →P149
- Scan a code from a distance of approximately 10 centimeters and more away.
- ◆ Koressories) ◆ "Barcode Reader"

Barcode Reader screen will be displayed a few seconds later.

 When there is read data, the saved read data will be displayed.



Barcode Reader screen

"[Scan]"

appears at the top of the screen.

• [Light On]/[Light Off]: Turn on/off the Photo Light.



Scanning start screen

(\bullet)

Scan the code. When scanning completes, a tone sounds and the scanned data is displayed.

- [Cancel]: Cancel the scanning.
- If the code cannot be scanned within approximately 30 seconds, the FOMA handset returns to the Scanning start screen after a message appears.

Select data to scan \blacktriangleright \bigcirc \blacktriangleright Perform the following operations

- · Displayed items vary depending on the type of scanned data.
- · Always save the scanned data if you want to use it later

(Image)

View Image	Display an image. ▶ _h_ [Yes]
Save Barcode Data :	Saves the scanned data.

(Melody)

Play Sound	:	¢ (a melo [Yes aying N	→P240
		~		

Save Barcode Data : Saves the scanned data.

Add Bookmark

Save the URL in Bookmarks.

Image: Image [Select] > Enter a file name > (•)

Go to URL

Connect to the selected URL.

[Yes]

Compose Message

Create i-mode mail quoting the selected address or subject, etc. →P184

If the second second

Add to Phonebook

Save the name, phone number, etc. to a Phonebook.

Store Record :	Create and save a new Phonebook entry. →P93, P95 ◆ "Terminal"/"UIM" ◆ Save the Phonebook entry
Add Record :	Add items to an existing Phonebook entry. →P93, P95 ▶ "Terminal"/"UIM" ▶ Select a Phonebook entry ▶ ● ► Edit the entry

Voice Call

Make a voice call to the selected phone number.

♦ Ⅰ [Yes] ♦ ⊙ / ●

Video Call

```
Make a video call to the selected phone number.
```

♦ Ⅰ [Yes] ♦ ♥/●

Start i-appli

Start an i-appli.

▶ ▲ [Yes]

Copy

Copy selected URL, phone number or address on the Scanned result screen. →P301

Copy All

Copy all items on the Scanned result screen. →P301

Save Barcode Data

Save the scanned data

To scan split QR codes

- 1 Perform Steps 1 to 3 of "Scanning Codes" (P151) 2 After the message "Scan Next Barcode" appears,
- scan the next code
- 3 Repeat Step 2

File name of the scanned data

The scanned data is automatically named with the year, month, date, hour, minute, and second. The file cannot be renamed.

Example: Captured at 10:10:36 on November 1, 2006

JAN Code: "20061101101036.jan" QR Code: "20061101101036.gr"

Note

Common Functions

- Barcodes other than JAN Codes and QR Codes and 2 dimensional codes cannot be scanned.
- · Barcodes may not be correctly scanned because of scar, smudge, damage, printing quality or reflection of lights.
- Some codes may not be scanned depending on the type, size or QR code version.

• The scanned data cannot be saved on the microSD memory card.

Create Email

• If the address has invalid characters, nothing is entered in the address.

Making a Voice Call/Video Call

 Valid characters are numbers and symbols (#, *, +, -, P, "(" and ")"). If the phone number contains characters other than these, the call cannot be made.

Run i-appli

• To start an i-appli from scanned data, set "Start from Barcode" to "Yes". →P216

Save

 No more scanned data can be saved if 5 have already been saved. Press → [Ok] → Select scanned data ◆ ● "Delete" → → [Yes] if a message whether to delete the oldest data appears.

Using Saved Data

Barcode Reader screen (P151) ♦ Select scanned data ♦ (●) ♦ "View"

- Deleting Saved Scanned Data Select scanned data to delete ◆ ● ◆ Select "Delete" ◆ ▲ [Yes]
- 2 Select (image)/ (melody)/URL/ phone number/Email address ♦ ●
 - For subsequent steps, see Step 4 in "Scanning Codes" (P152).

i-mode/i-motion

i-mode	156
Displaying the i-mode Menu <i-mode menu=""></i-mode>	160
Accessing Sites	
Accessing Sites	160
Navigating and Performing Operations on Web Sites	161
Open the Most Recently Accessed Web Site	163
Opening Web Site	163
Saving Entries in My Menu	163
Changing i-mode Password	163
	164
Saving Web Site or Sites for Quick Access	
Saving the Contents of a Web Site <screen memo=""></screen>	165
Downloading Images or Melodies from Sites	
Obtaining Images from a Site or Message	168
Downloading Melodies from a Site	168
Downloading Templates from a Site	169
Downloading Dictionaries from a Site	169
Downloading Chara-den from a Site	169
Downloading Chara-den noin a Sile <download chara-den=""></download>	109
Useful Functions of i-mode	
Using Phone To/Mail To/Web To/i-appli To Functions	
Congression of the result of the second s	169
Configuring i-mode Settings	
Configuring i-mode Settings	170
Using Message Service	
When Receiving Messages <receiving messages=""></receiving>	172
Displaying Messages in the Message Box < MessageR/MessageF>	172
Using Certificates	
Handling SSL Certificates <certificate></certificate>	174
Configuring FirstPass Settings <client certificate=""></client>	174
Changing the Certificate Center Host	
<certificate center="" host=""></certificate>	175
Ilsing i-motion	
Using i-motion	175
Downloading i-motion Movies from Sites	1/5
Lownloading i-motion movies from Sites	176
	.70

i-mode

i-mode is a service that makes use of the Display of the FOMA handset supporting i-mode (i-mode handset) to enable you to use online services such as site (program) access, Internet access and i-mode mail.

Site (Program) access

You can use various types of online services offered by information providers (IP), such as weather forecasts and news by selecting " $\stackrel{\times}{\neg} \neg - /$ 検索 (Menu/Search)" from the i-mode menu. You can also download games or wallpaper.


Internet access

Directly entering a URL to an i-mode handset allows you to view various i-mode web sites.

i-mode mail

You can exchange messages of up to 5,000 fullpitch characters with i-mode handsets or with anyone who has an Email address on the Internet. Deco-mail, still images or videos can also be exchanged.

How the Service Works

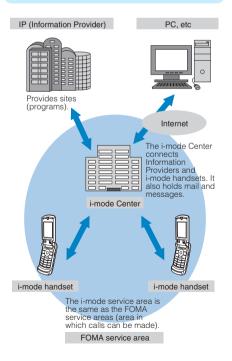

Note

- i-mode is a fee-based service requiring a separate subscription. For details on subscription, contact the "DoCoMo Information Center" on the back of this manual.
- Once you subscribe to the FOMA service, you can use all services from that day.
- If you switch the subscription from the mova service (with i-mode subscription) to the FOMA service, the My Menu contents will be transferred. All of the "My Menu" contents may not be transferred to FOMA depending on the sites. You may need to register again. For sites that allow transferring "My Menu", check "News" under the i-menu.
- i-mode fees are based on the amount of exchanged data (number of packets). This manual does not include information on fees. For information on fees, refer to "Mobile Phone User's Guide [i-mode]" that was provided when you subscribed to i-mode.
- The i-mode service contents are subject to change.
 For details, refer to the latest "Mobile Phone User's Guide [i-mode]".

Site (Program) Access

You can access sites with simple key operations to use various online services offered by information providers (IP). These online services include inquiring on bank account balances, transferring money, purchasing tickets, viewing news, looking up in dictionaries, and downloading ring melodies.

Opening Sites

After you connect to the i-mode Center, the iMenu opens. From this menu, you can access sites (programs) or the "週刊 i ガイド (Weekly i Guide)".

	日マイメニュー MEN <u>スコーノ後載</u> 第一 第一 第一 第一 第一 第一 第一 第一 第一 第一	MENU What's New Yes What's New Yes Menu List Options Yes BER
	iMenu (in Japanese)	iMenu (in English)
□マイメニュー (My Menu)	Frequently accessed sites can be saved for quick connection. →P163 Fee based sites in iMenu will be saved automatically. Up to 45 sites can be saved.	

⊇メニュー/検索 (Menu/ Search)	You can search your favorite web site by entering a key word in the 検 索BOX (Search BOX) in "メニュー/ 検索 ("Menu/Search")". Also, linked with various search sites, you can perform general web site search.
③週刊 i ガイド (Weekly i Guide)	The latest information about new or recommended sites are provided every day from Monday to Friday. Also, there is a special corner for music and games.
▲とくする メニュー (Tokusuru Menu)	Weekly updates on interesting PR campaigns, premiums and discount coupons, etc. are provided. (Sponsored by D2 Communications)
5 i エリア -周辺情報- (i Area-Vicinity Information)	Easy-to-use information on the area you are currently located, such as weather forecast, maps and town information is provided.
6マイボックス (MyBox)	MyBox is a membership service that allows you to quickly access the saved sites or shops.
 ⑦料金&お申 込・設定 (Options) 	You can check or pay your bill, change your subscription items, or subscribe to additional services. You can also configure i-mode mail settings or change your i-mode password.
■お知らせ (News)	Information from DoCoMo and instructions and rules for using i-mode are provides.
TOPICS	The latest topics are introduced.
ENGLISH	You can switch the iMenu to English.
日本語	You can switch the iMenu to Japanese.

- Setting screens only provide examples. Some screens may appear differently depending on the settings.
- The above menu is an example when iMenu screen in Japanese opens.

Note

- Some sites require fees to use their information (i-mode pay sites).
- Some services offered by information providers (IP) may require a separate subscription.
- Packet communication charges do not apply except during communication with the i-mode Center even if is blinking.
- If you subscribe to the Dual Network service, the iMenu screen opens differently.

Other Convenient Services

i-Channel

i-Channel is a service that DoCoMo or IP (Information Provider) use to distribute graphical information such as news or weather forecasts to i-mode handsets. Information is periodically received and telops flow on the Wallpaper screen for the latest information. You can press \rightarrow to show a Channel List. Also, you can obtain more detailed information by selecting a channel you want to see from the Channel List.


 Compatible devices - Available on the i-Channel compatible handset.
 For details, refer to "Mobile Phone User's Guide [i-mode]".

i-motion

You can download images or sounds from i-mode sites to play or use as screen saver.

- Downloading i-motion Files →P176
- Playing i-motion Sounds →P233
- Automatically Playing i-motion Files →P177

IP (Information Provider)



-mode/i-motion

Chaku-motion/Chaku-Uta®

You can download an i-motion file from an i-mode site to your i-mode handset to use it as a ringtone or Incoming call screen. In addition to melodies, you can use the singing voice of your favorite singer as a ringtone. However, you cannot set some incompatible i-motion files as Chakumotion.

- Setting Chaku-motion →P113
- "Chaku-Uta" is a registered trademark of Sony Music Entertainment Inc.

i-appli

i-appli downloaded from various sites allow you to use your i-mode handset in many new, convenient ways. For example, you can download various games to your i-mode handset, or a stock market i-appli for automatically checking stock prices periodically. You can scroll a map smoothly because only the data you need is downloaded with a map i-appli.

- Downloading an i-appli →P211
- Starting an i-appli →P212
- Starting an i-appli Automatically →P216

Continued on the next page ••• 157

i-appli stand-by screen

On the i-appli stand-by screen, you can use an i-appli as the Wallpaper screen, and still receive mails or make calls. You can set the Wallpaper screen to display the latest news or weather forecast, or have your favorite character notify you of new mails or alarms.

Setting the i-appli stand-by screen →P217

🖬 i-appli DX

You can make even greater use of an i-appli. For example, you can link the i-mode handset data (mail, call logs, Contacts, etc.) to i-appli DX to create mail messages with your favorite animation character, to have the animation announce the names of callers, or to update realtime information such as stock prices or sport events.


i-appli DX →P210

Chara-den

During a video call, you can send an animation character to the other party's video call handset instead of your own image, or make the character move using key operations.

- Downloading Chara-den →P169
- Viewing Chara-den →P239
- Setting Chara-den →P85
- Operating Chara-den →P239

IP (Information Provider)



Infrared communications

You can exchange Contacts, Email, and bookmarks with another mobile phone or PC with infrared capability.*


An i-appli enables you to connect to another device with infrared capability and provides for a wider variety of usage. For example, you can use the handset with an i-appli as a TV remote controller or as a membership card.

- *: You may not be able to exchange data with some devices even if they have the infrared capability.
- Switching to Infrared communication mode →P252

SSL communication

SSL employs authentication and encryption technology to protect privacy and make data communication more secure. SSL pages use data encryption to prevent eavesdropping or identity theft, and file overwriting to make exchange of personal data including your credit card numbers or addresses more secure. There are 2 types of SSL communication: One displays an SSL site (SSL page) using the SSL certificates on the handset without any special operations and the other 1 displays an SSL site using the user certificate downloaded from the FirstPass center. Depending on the site, different certificates are used.

- Using the SSL certificate stored in the i-mode handset →P174
- Using the User certificate of the FirstPass center →P174



UIM restrictions

Some melodies, still images and videos may be restricted from use when a UIM other than the one used for obtaining these files is used in the handset. If a different UIM is inserted or a UIM is not inserted, obtained files cannot be played or displayed.

- The restrictions do not apply for still images or videos captured with the Camera or files transferred from external memory to the i-mode handset.
- Ringtones or Wallpaper settings assigned to handset functions will revert to defaults.

i-melody

You can download the latest melodies into the i-mode handset to use them as ringtones. →P168

i-animation

You can download your favorite animation to the i-mode handset and display it as Wallpaper screen or Incoming call screen. \rightarrow P168

Flash[®]

Flash is an animation technology using images and sounds. With Flash movies, you can use various kinds of animations and enhanced sites. You can also download images of Flash images to the i-mode handset and use them as screen saver. Some Flash images can browse the handset data including:

- Battery level Signal strength Date and Time
- Video/i-motion, melody volume Language
- Handset model information

Message service

The Message Service delivers required information (messages) automatically to your i-mode handset. There are 2 types of Message Service: MessageR (Request) and MessageF (Free).

MessageR (Request)	Subscribe to sites that provide Message Service to have information automatically delivered to your handset.
MessageF (Free)	Messages are delivered without charges for packet communication.

- Receiving messages via the Message Service →P172
- The default setting for MessageF (Free) is "Receive" if you subscribed to i-mode at the same time as you newly registered the FOMA handset on October 1, 2004 or later. You need to change the setting to "Not Receive" to stop receiving MessageF.
 - If the above case does not fit to you, you need to set "Options" to receive before receiving MessageF. The option is set to "Not Receive" by default.
- Messages R/F are stored at the i-mode Center while your handset is turned off or out of the service area.
- Messages R/F are stored at the i-mode Center as follows: If the maximum number of savable mails is exceeded and storage period is expired, the oldest messages will be overwritten first.

Message Type	The Maximum number of savable mails	The maximum number of storage period
MessageR	300	72 hours
MessageF	300	72 hours

 You can download Messages R/F from the i-mode Center using "Check new message". →P172

News delivery service

DoCoMo distributes information such as news and weather forecasts to i-mode handsets using the MessageR (Request) function. The News Delivery Service is a fee-based service requiring a separate subscription. After your new subscription has been processed, this service is automatically saved to My Menu, enabling you to access the same information from My Menu.

MessageR Screen Components →P173

i-mode password

The i-mode password is required to save/delete in My Menu, to subscribe to i-mode fee-based sites, or to configure i-mode mail settings. The password is set to "0000" by default. Change it to a 4 digit number of your own choice. Do not reveal your i-mode password to others.

Changing the i-mode password →P164

Internet Access

You can view web sites that support i-mode by entering the web site address (URL).

- Viewing web sites →P163
- Web sites that do not support i-mode may not be viewed correctly. Web sites that support i-mode are sites created using tags designed for i-mode.
- Web sites may be viewed differently from the way they appear on a PC.
- It may not be possible to view a web site that has a URL of more than 256 half-pitch characters.

Before using i-mode

- Contents of sites (programs) and web sites are generally protected by copyright law. Data, such as text or images you download to the i-mode handset from sites (programs) or web sites, can be used only for personal entertainment but cannot be used, in whole or in part, as it is or after modification, for sale or redistribution, without the consent of the copyright holders.
- The contents saved on the i-mode handset (mail, Message R/F, Screen Memos, i-appli, and i-motion movies) and saved Bookmarks, etc. may be lost due to handset failure, repair or other mishandling. It is recommended that you make a copy of important data and keep it in a separate place. DoCoMo is not responsible for lost data.
- When an i-mode handset is repaired or replaced, DoCoMo does not restore all information downloaded via i-mode, i-appli or i-motion due to copyright law protections. If you insert another UIM or turn the handset power on without the UIM, depending on the model of the handset, still images, videos, melodies, Email attachments (still images, videos or melodies), screen memos or Messages R/F cannot be viewed or played.
- When the data with UIM restrictions is set as Wallpaper or a ringtone, the setting will revert to its default if a different UIM is inserted or the handset power is turned on without a UIM. Inserting the UIM used when the data was originally downloaded, will restore the settings.

Displaying the i-mode Menu

You can use i-mode functions from the i-mode Menu.





-modo/

Connect to the i-mode Center. \rightarrow P160

Bookmark

iMenu

Open the Bookmark folder list screen. →P164

Perform the following operations

Go to location

Enter a URL to connect to the Internet. →P163

Screen memo

Open the Screen Memo folder list screen. →P166

Last URL

Open the last viewed i-mode site or web site. →P163

MessageR

Open a list of MessageR. →P172

MessageF

Open a list of MessageF. →P172

Check new message

Check whether i-mode mail or Message R/F are stored at the i-mode Center. \rightarrow P172

i-mode setting

Configure the handset function regarding i-mode. →P170

SWAP

Access another application from the phonebook or schedule. \rightarrow P258

Accessing Sites

You can use a variety of services offered by IP (Information Provider).

• Services vary depending on the information provider. Some sites require a separate subscription.

i-mode menu screen (P160) ♦ "iMenu" ♦ "メニュー/検索"

4 appears at the top of the screen during i-mode communication.



• Press 上 [Cancel] to cancel visiting a web site while downloading a page.

🕨 Select an item (linked page) 🕨 💽

- Jim [Function]: Return to the previous screen.
- Terminate i-mode. Press 上 [Yes].

Note

- When a number appears in front of a linked item, press the corresponding Dial Key to visit the site. However, some sites may not be connected.
- Some sites require the "serial number of your mobile phone/UIM card" to be sent in order to gain access. The "serial number of your mobile phone/UIM card" is sent to the IP (Information Provider) so that the IP can recognize you and provide customized information. The serial number is also used to judge whether the contents that the IP provides can be used on your mobile phone. The "serial number of your mobile phone/UIM card" is sent via the Internet to the IP (Information Provider) and it may be seen by a third party. This operation does not send your postal address, age, or sex to the information provider.

Function Menu on the Site Display Screen

While accessing a site ♦ → [Function] ♦ Perform the following operations

iMenu

Open iMenu.

Register bookmark

Save the URL of the open page as a Bookmark. Go to Step 2 in "Saving in Bookmarks" (P164).

Bookmark list

Open the Bookmark folder list screen. →P164

Screen memo

Save the displayed page to the Screen Memo. Go to Step 2 in "Saving Screen Memos" (P165).

Save image

Save images contained in the displayed page. Go to Step 2 in "Saving Images from a Site or Message" (P168).

Go to location

Enter a URL or select one from the Bookmark Log to view a web site. \rightarrow P163

View/Copy URL

Display the URL of the open page.

- [Jok]: Returns to the previous screen.
- [Copy]: Copies the URL. Up to 256 half-pitch characters can be copied.

Compose message

Create i-mode mail with the URL of the open page pasted in the message text. Go to Step 3 in "Creating and Sending i-mode Mail" (P184).

Compose SMS

Create SMS (Short Message Service) message with the URL of the open page pasted in the message text. Go to Step 2 in "Creating and Sending SMS (Short Message Service) Message" (P206).

Save in Phonebook

Save the phone number or mail address highlighted on the open page to a Contact. Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97).

Image display

Set whether to display images contained on the open page.

"Display"/"Not display"

Reload

If the open page is updated, the contents of site are updated.

View certificate

If the opened page supports SSL, the contents of the SSL Certificate are displayed.

Retry

Play an animation or a Flash image contained in the displayed page from the beginning.

Sound effect

Set whether to play sound effects for a Flash image. \rightarrow P170

Convert char. code

If characters are not displayed correctly, try changing to another character encoding.

SWAP

Access other applications such as Phonebook, or Datebook. \rightarrow P258

Note

Image display

 Images may not be displayed correctly even when this option is set to "Display". In that case, appears.

Convert character code

- If characters do not display correctly, repeat the operation. However, after changing the code 4 times, the default character code restores.
- Characters may not be displayed correctly even after repeatedly changing the code.
- The new character encoding is valid only for the currently open site.

When an SSL page is acquired

The right screen opens when you access an SSL site. After acquisition is completed, the SSL page opens and is displayed on the top of the screen.



To return to a normal site

The right screen opens when you return to a non-SSL site. Press (A) [Yes] to return to a normal site, and (a) disappears.



Note

 If the SSL Certificate has already expired or the site does not support SSL, a warning indicating that this site may not be secure may appear. Press <u>—</u> [Yes] to connect. However, your personal information (credit card number or contact address) may not be sent safely.

Changing to iMenu in English

The iMenu can be displayed in English.

i-mode menu ♦ "iMenu" ♦ "ENGLISH"

- iMenu in English will be displayed.
- To change back to the Japanese display, select "日本語 (Japanese)" and press [Select].

Navigating and Performing Operations on Web Sites

This section describes basic operations on web sites.

Going Back to the Previous Page/ Going to the Next Page


- Entered characters or settings at the site will not be stored in the cache.
- Terminating i-mode deletes data from the cache.



- (blue): Saves one previous screen. Press to return to the previous screen.
- (blue): Saves the next screen. Press () to go to the next screen.

Example: Pages are displayed in the order of Screen "A" \rightarrow "B" \rightarrow "C" \rightarrow "B" \rightarrow "D"

As shown in the following figure, sites are displayed in the order of "A" \rightarrow "B" \rightarrow "C". Displaying "D" after returning to "B" deletes the "B" \rightarrow "C" history linkage and the "B" \rightarrow "D" history is saved.



Note

• When a Flash movie is played, displayed action may be different from a standard site display.

Selecting Links or Items

You may need to perform operations using the following items while connected to i-mode. For details, refer to "Mobile Phone User's Guide [i-mode]".

Item	Sample Icon	Description
Radio button	: (Not selected)	You can select only 1 choice.
	(Selected)	

Item	Sample Icon	Description
Check box	: (Not selected)	You can select multiple choices.
	: (Selected)	
Text box		Enter text. Select a text box and press (•) to open the text entry screen.
Pull down menu	東京初 東京小川県 東京小川県 東京小川県 東京 東京 小川県 大東 木 馬県 赤 木 木 木 木 京 京 泉 京 泉 京 泉 京 泉 京 泉 京 泉 泉 泉 泉	Select an item from a list of choices. Select a pull down menu item and press • to open the list of choices.

Note

Text Box

 To enter a phone number saved in the FOMA handset Phonebook, press ([Function] ◆ "Import" ◆ "Phonebook" and select the number. However, an email address saved in the Phonebook cannot be quoted.

Flash Images

The FOMA handset supports Flash, an animation technology using images and sounds. You can access sites that provide various kinds of animations using the handset. You can also download a Flash image and set it as screen saver.

Note

- Although Flash movies are displayed, the displayed Flash movies may not work correctly.
- Some Flash movies can use data saved on your handset. To allow Flash movies to use the data, set "Use registrated data" to "Use".
- Some Flash movies play sound effects. To not sound, set "Sound effect" to "Not play".
- If you play a Flash movie with vibration set, the handset vibrates regardless of the "Sound Profiles" setting on the handset.
- Flash movies are not displayed if "Image display" is set to "Not display".
- You may not be able to display an entire image even if you perform a save operation or save as Screen Memo depending on the Flash movie.

Open the Most Recently Accessed Web Site

After i-mode is terminated, the URL of the last open page is saved in "Last URL". You can reconnect to the most recently accessed page using Last URL.

i-mode menu screen (P160) ♦ "Last URL"

• (H) [Function]: Copy/Delete the URL. Press (H) [Yes] to delete the URL.

2 •

Internet Access

Opening Web Site

You can view a web site by entering its URL. A URL consists of half-pitch alphanumeric characters and symbols.

i-mode menu screen (P160) ♦ "Go to location"

The web site is viewed.

🔈 "[New entry]" 🕨 Enter a URL 🕨 💽

• Up to 512 half-pitch characters can be entered.

Note

- Web sites that do not support i-mode may not be viewed correctly.
- When connected by entering the same URL as one in the history, the old information is overwritten and the entry is shown on top as the latest URL entry in the history.

Accessing a Web Site Using the Bookmark Log

Up to 10 previously entered URLs are stored as the Bookmark Logs. You can visit a web site by using a Bookmark Log.

i-mode menu screen (P160) ♦ "Go to location"

The web site is viewed.



Note

 If more than 10 URLs are entered, the oldest URLs will be overwritten. • Used log will be displayed at the top of the list as the latest URL log.

Function Menu on the Internet Screen

Internet screen (P163) ♦ Select an URL log ♦ 👍 [Function] ♦ Perform the following operations

View/Copy URL

Display the selected URL log.

- [OK]: Connect to the displayed URL.
- ie [Copy]: Copy a URL. Up to 256 half-pitch characters can be copied.

Register bookmark

Save the selected URL log as a Bookmark. Go to Step 2 in "Saving in Bookmarks" (P164).

Save in Phonebook

Save the selected URL log in a Contact. Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97).

Delete

Delete	:	Delete the selected URL log. ♦ _h_ [Yes]
Delete multiple	:	Select and delete multiple URL log. Checkmark to a URL log to delete [Exec.]
Delete all	:	 ▶ Enter the Security Code ▶ ▲ [Yes]

My Menu

Saving Entries in My Menu

Frequently accessed sites can be saved in My Menu for quick connection.

- Up to 45 entries can be saved in My Menu.
- Some sites cannot be saved in My Menu.

Visit a web site "My Menu Registration"

Select the text box of the i-mode password ▶ ● ▶ Enter the i-mode password ▶ "決定 (OK)"

- The entered i-mode password is masked by asterisks "*".
- i-mode password →P159

Note

 When you subscribe to a fee-based site on the "Menu/Search", the site is automatically saved in My Menu. i-mode menu screen (P160) ♦ "iMenu" ♦ "ENGLISH" • "My Menu" • Select a site ••

Change i-mode Password

Changing i-mode Password

"i-mode Password" (4 digit) is required to subscribe to and unsubscribe from Message Services or fee-based i-mode sites, or configure Email settings. The password is set to "0000" by default. Change it to a number of your own choice. Do not reveal your i-mode password to others.

- i-mode menu screen (P160) 🕈 "iMenu" 🕨 "ENGLISH"
 "Options"
 "Change i-mode Password"
- Select the text box of "Current Password" • • • Enter the i-mode password (4 digit)
 - Select the text box of "New Password" > (•) Enter the new i-mode password (4) diait)
- Select the text box of "New Password Δ (Confirmation)" • • • Enter the new i-mode password (4 digit)
 - "Select"

Note

If you forget the i-mode password, you need to bring an ID such as your driver's license to a service counter such as DoCoMo shop to have the i-mode password reset to "0000".

Bookmarks

Saving Web Site or Sites for Quick Access

Save frequently viewed sites or web sites in Bookmarks to display the page guickly.

Saving in Bookmarks

 Up to 200 page URLs can be saved in Bookmarks for all folders.

- While accessing a site March [Function]
- "Register bookmark"
- If there is already the same URL saved, a confirmation screen to overwrite appears. Select [Yes].
- Select a folder **b** [Select] **b** Enter a Bookmark name

Note

- · Up to 256 half-pitch characters can be saved for each URL Bookmark.
- · Up to 12 full-pitch or 24 half-pitch characters can be saved for a Bookmark title.
- If the maximum number of Bookmarks has been saved, a confirmation screen whether to overwrite is displayed. To overwrite, press I Ves] Select a folder I [Select] Select a Bookmark to overwrite (•) • [Yes] • Enter a bookmark name

Accessing Web Sites or Sites from **Bookmarks**

i-mode menu screen (P160) **b** "Bookmark"



folder list screen

Select a folder **>** (•)



screen

Select a Bookmark **\P** (•)

Function Menu on the Bookmark Folder List Screen

Bookmark folder list screen (P164) > IFunction] ▶ Perform the following operations

Create folder

Create a new folder. Up to 7 new folders can be created.

Enter a folder name

Edit folder name

Edit the selected folder name.

Edit a folder name

Sort folders

Sort folders.

- Select a folder to sort
 ▲ [Select]
 Use
 (b) to select a destination
 ▲ [Define]
- Repeat the same steps to sort other folders. To end sorting, press *ie* [Return].

Delete folder

Delete the selected folder.

Enter the Security Code

Bookmark log

List all saved Bookmarks.

Send all entries

Send all saved Bookmarks at once.

Infrared : Send via infrared communication. Go to Step 2 in "Sending All Data" (P255).

Bluetooth : Send via Bluetooth.

 Enter the Security Code Enter the authentication password

 [Yes] Go to Step 2 in "Registering and Connecting a Bluetooth Device" (P273).

Note

Edit folder name/Sort folders/Delete folder

 The pre-installed "Main folder" cannot be renamed, moved, or deleted.

Function Menu on the Bookmark List Screen

Bookmark list screen (P164) ♦ Select a Bookmark ♦ → [Function] ♦ Perform the following operations

View/Copy URL

Display the URL of the currently selected Bookmark.

- [h] [Connect]: Connect to the Displayed URL.
- (is) [Copy]: Copy the URL. Up to 256 half-pitch characters can be copied.

Edit title

Edit the name of the Bookmark title.

Edit a Bookmark name

Move to folder

Move the Bookmark to another folder.

Compose message

Create i-mode mail with the URL of the selected Bookmark in the message text. Go to Step 2 in "Creating and Sending i-mode Mail" (P184).

Save in Phonebook

Save the URL of the selected Bookmark with a Contact. Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97).

IrDA/Bluetooth

Infrared :	Send 1 file using Infrared communication.
Bluetooth :	Send via Bluetooth. Go to Step 2 in "Registering and Connecting a Bluetooth Device" (P273).
Delete	

Delete	
Delete :	Delete the selected Bookmark.
Delete multiple :	Select and delete multiple Bookmarks. Checkmark to a Bookmark to delete (Exec.) (Yes).
Delete all :	Delete all Bookmarks in the folder. ♦ Enter the Security Code ♦ ▲ [Yes].

Screen memo

Saving the Contents of a Web Site

You can save an opened page as a Screen Memo. Saved Screen Memos can be opened without connecting to i-mode.

Saving Screen Memos

- Up to 30 Screen Memos can be saved. However, the number of savable Screen Memos may be fewer if the pages are large.
- Up to approximately 100 K bytes per memo can be saved.

While accessing a site 🕨 👍 [Function]


"Screen memo"

-mode/i-motion

Note

Viewing Screen Memos

i-mode menu screen (P160) ♦ "Screen memo"

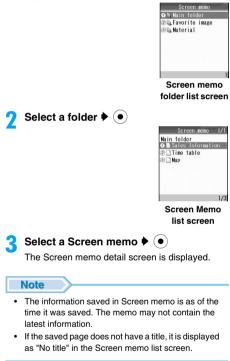

Function Menu on the Screen Memo Folder List Screen

Screen memo folder list screen (P166) [Function] Perform the following operations

Create folder

Create a new folder. Up to 7 new folders can be created.

Enter a folder name

Edit folder name

Edit the selected folder name.

Edit a folder name

Sort folders

Sort folders.

- ♦ Select a folder to sort ♦ ▲ [Select] ♦ Use () to select a destination ♦ ▲ [Define]
- Repeat the same steps to sort other folders. To end sorting, press i.e. [Return].

Delete folder

Delete a selecting folder.

Enter the Security Code

Screen memo log

List all saved Screen memos.

Note

Edit folder name/Sort folders/Delete folder

• The pre-installed "Main folder" cannot be renamed, moved, or deleted.

Function Menu on the Screen Memo List Screen

Screen memo list screen (P166) ♦ Select a Screen memo ♦ (♣) [Function] ♦ Perform the following operations

Edit title

Edit the name of the selected Screen memo.

Edit a Screen Memo name

Protect/Release

Protect or release the selected Screen memo.

- To cancel protection, select from the following items:
- Release : Release the selected Screen memo.
- Release all: Release all Screen memos in the folder. ♦ ▲ [Yes].

Move to folder

Move the selected Screen memo to another folder.

Move	Move the selected Screen memo. ♦ Select a destination folder ♦ ▲ [Select] ♦ ▲ [Yes].
Move multiple	Select and move multiple Screen memos.
	 Checkmark to a Screen memo to move in [Exec.] ◆ Select a destination folder ◆
Move all	Move all Screen memos in the folder. ♦ Select a destination folder ♦ ▲ [Select] ♦ ▲ [Yes].

Sort

Sort Screen memos by setting a condition such as saved date and time or title.

Svd date(new>old)

: Rearrange screen memos in chronological order by saved date and time.

Svd date(old>new)

: Rearrange screen memos in reverse chronological order by saved date and time.

Title(ascend.)

: Rearrange screen memos sorted by title in ascendant order.

Title(descend.)

: Rearrange screen memos sorted by title in descendant order.

Prot/unprot order

: Screen memos are rearranged by protected → unprotected.

Unprot/prot order

: Screen memos are rearranged by unprotected → protected.

View/Copy URL

Display the URL of the selected Screen memo.

- [JoK]: The Screen memo list screen reappears.
- [Copy]: Copy the URL. Up to 256 half-pitch characters can be copied.

File property

Display the title, stored date and time, size and URL of the selected Screen memo.

Delete

Delete :	Delete the selected Screen memo. ♦ ⓓ_ [Yes].
Delete multiple :	Select and delete multiple Screen memos.
	♦ Checkmark to a Screen memo to delete Image: A straight of the str
Delete all :	Delete all Screen memos in the folder. ♦ Enter the Security Code ♦

Note

Sort by

 If you sort the titles in ascending order, the titles will be reordered in the order of symbols → numeric (0 → 9) → alphabetic (A → Z → a → z) → hiragana → katakana (full-pitch) → kanji (the order of Shift-JIS) → katakana (half-pitch). If you sort the titles in descending order, the list will be rearranged in a reverse order from ascending order by title.

 When full-pitch and half-pitch characters are mixed up, half-pitch characters take precedence excluding katakana.

- Symbols are sorted in the order of ASCII \rightarrow Shift-JIS character codes.

Function Menu on the Screen Memo Detail Screen

Edit title

Edit the name of the displayed Screen memo.

Edit a Screen Memo name

Protect/Release

Protect or release the displayed Screen memo.

File property

Display the title, stored date and time, size and URL of the selected Screen memo.

Delete

Delete Screen memos.

▶ Ⅰ_ [Yes]

Register bookmark

Save the URL of the Screen memo in Bookmarks. Go to Step 2 "Saving in Bookmark" (P164).

Bookmark list

Open the Bookmark folder list screen. →P164

Save image

Save images contained in the Screen memo. Go to Step 2 in "Saving Images from a Site or Message" (P168).

View/Copy URL

Display the URL of the displayed Screen memo.

- 🕒 [OK]: The Screen memo detail screen returns.
- **I** [Copy]: Copy the URL. Up to 256 half-pitch characters can be copied.

Compose message

Create i-mode mail with a URL from a Screen memo pasted a message text. Go to Step 2 in "Creating and Sending i-mode Mail" (P184).

Save in Phonebook

Phone numbers and email addresses highlighted in a Screen memo. Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97).

View certificate

If the displayed Screen memo is an SSL page, the SSL certificate is displayed.

Retry

Play a Flash movie or an animation contained in the Screen Memo from the beginning.

Sound effect

Set whether to play sound effects of the Flash movie contained in the Screen memo. \rightarrow P170

Convert char. code

If characters do not display correctly, try changing to another character encoding.

Note

Protect

 Up to 15 Screen memos can be protected. The number of Screen memos that can be protected may vary depending on the data.

Delete

• Protected Screen memos cannot be deleted. Release Screen memo(s) before deleting.

Save image

Obtaining Images from a Site or Message

You can save images contained in the site, Messages R/F or Screen memo to the handset.

• Obtained images will be saved in "i-mode/Other" folder in "My Pictures" of the "Databox".

While accessing a site/on the Screen memo detail screen (P166) ♦ [Function] ♦ "Save image"

> The obtainable image is framed with a dotted line.



Note

- Images cannot be saved if "Image display" is set to "Not display.
- Some images saved on the handset may not be displayed even if they can be displayed at the site.
- Some obtained images may not be displayed correctly.
- A progressive JPEG format* image which is larger than 176 dots in width or height, or exceeds 176 x 144 dots in total cannot be saved.
 - *: The progressive JPEG format is one of the image formats widely used for i-mode or other web sites. At the beginning, the entire image is displayed coarsely then it gradually becomes more detailed.

Notice

The stored content may be lost due to the handset failure or repair. DoCoMo is not responsible for lost data. It is recommended that you keep saved content from the handset on a microSD memory card. You can connect the handset to a PC using Data Link Software and a FOMA USB Cable (optional) and save data to the PC.

iMelody

Downloading Melodies from a Site

 Downloaded melodies will be saved in "i-mode/Other" folder in "Melody" of the "Databox".

While accessing a site 🕨 Select a melody

- ▶ (●)
- Selecting Preview plays the melody. Operations during the Melody Playback →P241



🔰 "Save" 🕨 Enter a file name

• In the file name entry field, the file name of the melody to download is displayed.

Note

- Download may not be possible depending on the site.
- · Some downloaded melodies may not play correctly.
- Some downloaded melodies may have a section to be played already specified. These melodies will be played in their entirety under playback, however, as a melody set for a ringtone only the specified part is played.

Notice

The stored content may be lost due to the handset failure or repair. DoCoMo is not responsible for lost data. It is recommended that you keep saved content from the handset on a microSD memory card. You can connect the handset to a PC using Data Link Software and a FOMA USB Cable (optional) and save data to the PC.

Download Templates

Downloading Templates from a Site

- Downloaded templates will be saved in "Template List" (P188).
- While accessing a site ♦ Select a template ♦ (●)
 - Selecting Preview displays the template.



> "Save" ♦ ➡ [Yes] ♦ Enter a file name

Download Dictionaries

Downloading Dictionaries from a Site

• Up to 10 dictionaries can be saved. However, only 5 can be used.

While accessing a site Select a dictionary (

The downloaded dictionary is registered automatically on "Download Dictionary".

Note

- You can download dictionaries from the following Motorola's URL http://motomobile.ip/
- Using Downloaded Dictionaries →P303

Download Chara-den

Downloading Chara-den from a Site

- The downloaded Chara-den will be saved in the "i-mode/Other" folder in "Chara-den" in the "Databox".
 - While accessing a site ♦ Select a Charaden ♦ ●

	Store	Options
Save		
Exit		



"Save" + Enter a file name

• In the file name entry field, the file name of the Chara-den to download is displayed.

Phone To/Mail To/Web To/i-appli To Function

Using Phone To/Mail To/ Web To/i-appli To Functions

When the highlighted phone number, Email address or URL is displayed on site page or mail, you can make a call, send i-mode mail or display web site easily by using this function.

Phone To/AV Phone To Function

Make a voice call/video call (AV Phone). To the highlighted phone number at a site or in a mail message.

- • (•)/(•): Make a voice call.
- • / .: Make a video call.

Mail To Function

You can send mail to an Email address highlighted on a site page or mail.

🔹 Select an Email address 🕨 💽

 Go to Step 3 in "Creating and sending i-mode Mail" (P184).

Web To Function

Access a URL highlighted on a site page or mail.

Select a URL • • • Image [Connect]

i-appli To Function

You can start i-appli from a URL highlighted on a site or in i-mode mail.

 When "Start from browser", "Start from mailer", "Start from IR" and "Start from Barcode" under "Permissions" (P215) in i-appli, the i-appli does not start.

Common Functions

Note

 Phone To, AV Phone To, Mail To, or Web To function in mail sent from a PC may not be available.

Phone To/AV Phone To Function

• The Phone To/AV Phone To function may not be available depending on a site.

Mail To Function

- The Mail To function may not be available depending on a site.
- Correct the Email address before sending Email if necessary.

Web To Function

- The Web To function may not be available depending on a site.
- · Display of a URL varies depending on a site.
- The Web To function is available using a highlighted item other than a URL.

i-appli To Function

 It may not be possible to save an i-appli that immediately starts after using the i-appli To function.

i-mode setting

Configuring i-mode Settings

Default I	Font size (i-mode/Message): Standard Scroll: 1 line mage display: Display Jse registered data: Use Sound effect: Play
-----------	---

Set i-mode or Message R/F function.

i-mode menu screen (P160) ♦ "i-mode setting"

i-node setting 1/2 O Font size © Scroll © Image display © Message auto-display © Message auto-display © Message auto-display © Use registered data © Sound effect © Check new message i-mode setting Screen

Perform the following operations

Font size

Set the font size in the message text on a site, Screen memo or Messages R/F.

"i-mode"/"Message" * "Large"/"Standard"/"Small"

Scroll

- Set the number of lines when scrolling in the message text on a site, Screen memo or Messages R/F.
- "1 line" / "3 line" / "5 line" / "1/2 page" / "1 page"

Image display

Set whether to display images or Flash images contained on the site page or Screen memo.

"Display"/"Not display"

Message auto-display Set to automatically display Messages R/F. →P172

Message att. melody

Set whether to automatically play a melody when Messages R/F are displayed. →P172

i-motion auto play

Set whether to automatically play an i-motion movie when the i-motion movie is downloaded from a site or Email. →P177

Use registered data

When a Flash image is displayed while a site or Screen memo is displayed, information saved on the handset may be used. Set this option whether to use the information on the phone is used.

"Use"/"Not use"

Sound effect

Set whether to use sound effects when a Flash image is played while a site or Screen memo is displayed.

"Play"/"Not play"

Check new message

When you perform "Check new Message", select an item (Mail, MessageR/F) to check.

Checkmark the item to check

Connection timeout

Set the time until the connection is automatically terminated if no response was returned due to network traffic. →P171

Host setting

Set an APN (Access Point Name) when you use services other than i-mode (DoCoMo). i-mode becomes unavailable when you connect to an APN other than DoCoMo. \rightarrow P171

Certif. Center host

Set the address to download a User Certificate. →P175

Certificate

View the content of the SSL Certificate or set valid or invalid. \rightarrow P174

Client certificate

Perform steps from applying for the issuance of User Certificate to downloading it. \rightarrow P174

Check i-mode setting

View the i-mode setting configuration.

Reset i-mode

Restore all settings to their defaults.

Note

Image display

 Images may not be displayed correctly even this option is set to "Display". In that case, appears.

Use registered data

 When this option is set to "Use", the battery level, signal strength, Date & Time, Ring Volume, Language, and handset model information may be sent to IP (Information Provider) via the Internet, and a third party may intercept the information.

Sound effect

• Even if "Play" is set, Sound Effects may not used depending on the Flash image.

Reset i-mode

- Resetting removes the host set in "Host setting" and sets "i-mode(FOMA Card)".
- This option cannot be performed during i-mode communication.

Connection timeout

Setting the Connection Timeout

Default 60 seconds

Set the time until the connection is automatically terminated if no response was returned due to network traffic.

i-mode setting screen (P170) "Connection timeout"

2 "60 seconds" / "90 seconds" / "Unlimited (no setting)"

 If "Unlimited(no setting)" is selected, the connection will not be automatically cancelled.

Note

 Even if this option is set to "Unlimited(no setting)", the connection attempt may be terminated because of the radio wave reception level.

 This option cannot be set during i-mode communication.

Host setting

Changing the Access Point from i-mode

Default i-mode(FOMA Card)

If you use the i-mode service of DoCoMo, do not change the access point. Set an APN (Access Point Name) when you use services other than i-mode (DoCoMo). i-mode and i-mode mail become unavailable when you connect to an APN other than DoCoMo.

Storing Access Points

Host name

Enter the host name within 10 full-pitch or 20 half-pitch characters.

Enter the host name

Host number

Enter the host number within 99 half-pitch alphanumeric characters.

Enter the host number

Host address1


Enter the host address within 30 half-pitch alphanumeric characters.

Enter the host address

Host address2

The address entered in "Host address1" is entered automatically. To change the i-Channel host, enter the i-Channel host address within 38 half-pitch alphanumeric characters.

Enter the host address



Changing/Deleting a Host

i-mode setting screen (P170) ♦ "Host setting"

- To delete an access point Select an access point to delete, is [Delete] Enter the Security Code March [Yes].
- To edit an access point Select an access point to change, (•).

Note

- This option cannot be set during i-mode communication.
- Pake-Hodai is not applied to packet communication with an APN other than "i-mode".
- When an access point is changed, the telop of the i-Channel does not appear. When the information is updated or you download the latest information by pressing (A), the telop will be turned on automatically.
- "i-mode(FOMA Card)" is set as the connecting destination when the setting of connecting destination is deleted.

When Receiving Messages

When the handset is in the service area, Messages R/F are sent automatically from the i-mode Center. When Messages R/F arrive, the display, ringtone or vibration notifies you of new messages.

• Up to 20 MessageR and up to 15 MessageF can be saved. However, the number of savable messages varies depending on the message size.

Viewing New Messages

When Message R/F arrives, the latest message is appears automatically.

 You can set whether to open the detail screen automatically when Message R/F is received using "Message auto-display". →P172

When Message R/F arrives, it is received automatically

- 📧 (Yellow) blinks for MessageR and 📧 (Yellow) for MessageF.
- After messages are received, the reception result of Messages R/F is displayed.
- If no operation is performed for approximately 15 seconds, the previous screen returns.

Message auto-display

Displaying Messages Automatically

Default MessageR Preferred

Set how to automatically display MessageR or MessageF.

i-mode setting screen (P170) 🕨

"Message auto-display" Perform the following operations

MessageR preferred	: When MessageR and F are received at the same time, MessageR are displayed automatically.
MessageR only	: Only MessageR are automatically displayed.
MessageF preferred	: When MessageR and F are received at the same time, MessageF are displayed automatically.
MessageF only	: Only MessageF are automatically displayed.
Not auto display	: Messages are not displayed automatically.

Message attached melody

Playing a Melody Automatically When a Message is Displayed

Default Auto play

Set whether to automatically play melodies when Messages R/F are displayed.

- i-mode setting screen (P170) 🕨
 - "Message att. melody" "Auto play"/
 "Not auto play"

Check new message

Checking Whether Messages Have Arrived

Messages that were not received because the handset was out of the service area are stored at the i-mode Center. Checking new messages downloads the stored messages.

- You cannot check new messages when the handset is out of the service area.
- Set what to check (mail and Messages R/F) in "Check new message" (P201).

Press 🖾 twice in a row

After checking new mail, the Reception result screen opens.

7 Select "MessageR"/"MessageF"

Note

- The number of Messages R/F that can be saved at the i-mode Center and how long they will be retained if not delivered. →P159
- Incoming Message R/F is saved at the i-mode Center when:
 - The handset power is turned off
 - A video call in progress
 - Self Mode is set Out of service area
 - Connected to the FirstPass Center
 - Message R/F in the FOMA handset is full

MessageR/MessageF

Displaying Messages in the Message Box

When Messages R/F arrive from the i-mode Center, ind (Yellow) or ind (Yellow) appears at the top of the screen.



2 Subject

Icons displayed on the message R/F list/detail screen

lcons	Description
0	Unread Messages R/F
È	Read Messages R/F
Ē	Attachment that "UIM restrictions" is set.
Ē	Messages R/F with an image attached
5	Messages R/F with a melody pasted or attached
9	Protected Messages R/F

Sorting Message R/F

Message R/F list screen (P173) ♦ i.« [Sort]

Rcvd date (new>old)

Sort messages in reverse chronological order of the date received.

Rcvd date (old>new)

Sort messages in chronological order of the date received.

Subject (ascend.)

Sort messages in ascending order of the subject.

Subject (descend.)

Sort messages in descending order of the subject.

Note

- If you sort the subjects in ascending order, the objects will be reordered in the order of symbols → numeric (0 → 9) → alphabetic (A → Z → a → z) → hiragana → katakana (full-pitch) → kanji (the order of Shift-JIS) → katakana (half-pitch). If you sort the titles in descending order, the list will be rearranged in a reverse order from ascending order by subject.
 - When full-pitch and half-pitch characters are mixed up, half-pitch characters take precedence excluding katakana.
 - Symbols are sorted in the order of ASCII → Shift-JIS character codes.

Function Menu on the Messages R/F List Screen

Search

Search for message under set conditions.

Search unread	:	Search only for unread messages.	
Search read	:	Search only for read messages.	
Search protected	:	Search only for protected messages.	
Search attached	:	Search only for messages with attachments.	
• To perform Po search/Polesce search on the list sereen			

• To perform Re-search/Release search, on the list screen after search, select ▲ [Function] ◆ "Search".

Protect/Release

Protect or release messages.

- To cancel protection, select from the following items:
- Release : Release the selected message.
- Release all : Release all messages.

▶ ▲ [Yes]

Delete

Delete	:	Delete the selected message. ♦ [Yes]
Delete multiple	:	Select and delete multiple messages. ♦ Checkmark to messages to delete ♦
Delete all	:	Delete all messages on the message list. ♦ Enter the Security Code ♦ ▲ [Yes].

Function Menu on the Messages R/F Detail Screen

Message R/F detail screen (P173) ♦ [Function] ♦ Perform the following operations

Protect/Release

Protect or release the displayed message.

Save image

Save images contained in the message. Go to Step 2 in "Saving Images from a Site or Message" (P168).

Check attachment

List files attached to the displayed message. →P193

Reload image

Re-download a file that failed to be acquired.

Save in Phonebook

Save URL, phone numbers and email addresses highlighted in Message. Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97).

Delete

Delete the message.

[Yes]

Note

Protect

 Up to 20 MessageR and up to 15 MessageF can be protected.

Reload image

 Images may not be displayed even after redownloading.

Delete

· Protected messages cannot be deleted.

Certificate

Handling SSL Certificates

Default Validate All

View the content of the SSL Certificate or set valid or invalid.

i-mode setting screen (P170) •

"Certificate"

	Certificate	1/3
🖬 Cer	tificate 1	
🗹 Cer	tificate 2	
Cer	tificate 3	
Cer	tificate 4	
Cer	tificate 5	
Cer	tificate 6	
Cer	tificate 7	
Cer	tificate 8	
Cer	tificate 9	
	Certificate	•
	screen	

Checkmark to a certificate to enable

• [Detail]: Display the selected certificate.

🛛 🚺 [Complete]

Certificates used for SSL communication Certificate

Issued by an authentication company and saved on the handset by default.

DoCoMo Certificate

Required to connect to the FirstPass center or FirstPass sites and saved on the UIM (green).

User Certificate

Downloaded from the FirstPass center by selecting "Client certificate" under "i-mode setting" in i-mode Menu. Saved in the UIM (green).

Client certificate

Configuring FirstPass Settings

You can connect to the FirstPass Center to have your user certificate issued or to download it. The user certificate proves that you have subscribed to the FOMA service. The downloaded User Certificate is saved on the UIM and is used at sites that require a Client Certificate.

- · The UIM (blue) does not work.
- You need to set the date and time before connecting to the FirstPass Center. →P48
- Screens or steps at the FirstPass Center may be changed.
- While connected to the FirstPass Center, you cannot send/receive mail or receive Message R/F.
- FirstPass is not available overseas.

i-mode setting screen (P170) "Client certificate"



🕽 "English" 🕨 🖲

2

- "Request your certificate" 🕨 🖲
- Requesting revocation of the certificate Select "Other settings" to select "Revoke your certificate". Enter the UIM PIN2 and then operate following the instructions on the screen.
- Continue" ♦ (●) ♦ Enter your UIM PIN2

Certificate

5

 If you do not want to download the user certificate immediately, select "Menu". The screen asking whether to close the SSL page will be displayed.
 Press A. [Yes] to return to "Site display of the FirstPass Center".

Function Menu on the Client Certificate Screen

Client certificate screen (P174) Figure Form the following operations

View certificate

Display the certificate obtained via SSL communication.

Convert char. code

If characters do not display correctly, try changing to another character encoding.

Note

- Packet communication charges do not apply for the connection to the FirstPass Center.
- The packet communication charge for accessing FirstPass sites is included in Pake-Hodai (Packet Flat-Rate Service).
- Be sure to download the Client Certificate after requesting the issuance of new Client Certificate or Renewed Certificate. A Client Certificate you have not requested for issuance cannot be downloaded.
- After a Client Certificate is invalidated, the FirstPass site that requires the Client Certificate can no longer be accessed.

Certificate Center Host

Changing the Certificate Center Host

Default DoCoMo

You usually do not need to change the settings.

Set the address to download a Client Certificate.

i-mode setting screen (P170) ♦ "Certif. Center host"

- To specify the saved host, select "User defined host".
- Deleting a Registered Host
 - "User defined host" ♦ <u>i</u> [Delete] ♦ Enter the Security Code ♦ <u>i</u> [Yes].

2 "[User defined host]" ▶ ▲ [Edit] ▶ Enter the Security Code ▶ Perform the following operations

Host name

Enter the host name within 50 full-pitch or 99 half-pitch characters.

Enter the host name

Host address

Enter the host address within 100 half-pitch alphanumeric characters.

Enter the host address

Complete] [Complete]

Note

• This option cannot be performed during i-mode communication.

Using FirstPass

- FirstPass is DoCoMo's electronic authentication service. By using FirstPass, client authentication is enabled, whereby the site and the FOMA handset exchange certificates, check the other party's certificate and perform mutual authentication.
- When requesting issuance of a User Certificate, carefully read "the FirstPass Rules on usage regulation" on the screen, agree to this, and make the request.
- UIM PIN2 is required to use the User Certificate. Once the UIM PIN2 is entered, all subsequent operations will be deemed to be complete by you. Be careful not to let others use your UIM PIN or UIM PIN2.
- If the UIM is lost or stolen, the "DoCoMo Information Center" on the back of this manual can revoke your User Certificate.
- DoCoMo bears no obligation or responsibility regarding to the sites and information provided by FirstPass sites. Solve any problems you may have directly with the FirstPass site.
- DoCoMo and the certifiers do not guarantee security when you use FirstPass and SLL. You should use them at your own discretion.

i-motion

i-motion is composed of video and sound files. You can obtain it for use on the FOMA handset from i-motion sites and play or save to set for a Screen Saver or Ringer ID, etc.

i-motion Types

There are 2 types of i-motion movies. This FOMA handset handles only the standard type i-motion movie. Streaming type i-motion movies cannot be downloaded.

Standard

There are 2 forms standard type.

- ① Playback is possible after downloading (Up to 500 K bytes)
- ② Playback is possible while downloading (Up to 500 K bytes)
- Some standard type i-motion movies cannot be saved.

Streaming type (this FOMA handset does not support this type.)

Play back while downloading an i-motion movie. Up to 2 M bytes of i-motion can be played. The data is deleted after playback. It cannot be saved on the FOMA handset.

Note

- i-motion movies that can be downloaded and played are in MP4 (Mobile MP4) format. i-motion movies in ASF format cannot be downloaded or played.
- If you fast forward/rewind an i-motion movie during playback, only sound may be played and the video may not be displayed correctly.

Download i-motion movies

Downloading i-motion Movies from Sites

Up to 1000 i-motion movies can be saved. However, the number of files that can be saved may be smaller depending on the size of the files.

 The downloaded i-motion movie is saved in the "i-mode/Other" folder under "i-motion" in the "Databox".

While a site is displayed ♦ Select an i-motion movie ♦ (●)

 When "i-motion auto play" is set to "Auto play", an i-motion movie is played automatically after being downloaded. After the playback, the i-motion menu opens. Operations during Playback →P233

Play/Preview : Play an i-motion movie.

Save	: Save an i-motion movie. Go to Step 2.
File Details	: Display the name, size and type, etc. of the i-motion movie. →P236

Exit : Return to the site.

"Save"

When "i-motion auto play" is set to "Auto play"

▲ [Yes] ◆ Select "microSD"/"Phone". The i-motion is saved as the name of the obtained i-motion file.

When "i-motion auto play" is set to "Not auto play"

Select "microSD"/"Phone" ♦ Enter the file name.

• In the file name entry field, the file name of the i-motion to download is displayed.

Note

- Depending on the connected site or i-motion movie, the i-motion movie may not be downloaded, or played during the download.
- If you play a movie while downloading it, the movie may stop playing or the picture may become distorted due to signal reception.
- Some i-motion movies cannot be saved on the FOMA handset.
- Some i-motion movies have playback restrictions. If an i-motion movie has restrictions for the number of playbacks, playback period or playback expiration,
 is displayed. An i-motion movie with playback period restrictions cannot be played prior to or after the restriction period.
- Some downloaded i-motion movies may not play correctly.

Notice

The stored content may be lost due to the handset failure or repair. DoCoMo is not responsible for lost data. It is recommended that you keep saved content from the handset on a microSD memory card. You can connect the handset to a PC using Data Link Software and a FOMA USB Cable (optional) and save data to the PC.

When There are Highlighted Items in a Telop

When a telop is set in an i-motion movie, the telop is displayed during playback. You can use the Phone To, AV Phone To, Mail To or Web To function by selecting the highlighted phone number, mail address or URL.

After playing i-motion • [Yes]

To use the above functions while playing i-motion

Pause the i-motion to use Phone To, AV Phone To, Mail To, Web To function. While playing i-motion ()/()/()[Yes]

i-motion auto play

Setting Whether to Play an i-motion Movie Automatically

Default Auto play

Set whether to automatically play an i-motion movie when the i-motion movie is downloaded from a site or Email.

i-mode setting screen (P170) >

"i-motion auto play " "Auto play"/"Not auto play"

Mail

Mail Functions of FOMA Handset	180
What is i-mode Mail?	180
Displaying Mail Menu <mail menu=""></mail>	184
Creating i-mode Mail/Deco-Mail	
Creating and Sending i-mode Mail <creating i-mode="" mail="" sending=""></creating>	184
Creating and Sending Penode Man <creating man="" penode="" sending=""> Creating and Sending Deco-mail</creating>	186
Creating Deco-mail Using Template	188
Attaching a File	189
Receiving/Operating i-mode Mail	
When i-mode Mail is Received <automatic mail="" of="" reception=""></automatic>	190
Selecting and Receiving i-mode Mail <receive option=""></receive>	191
Checking for i-mode Mails <check message="" new=""></check>	191
Replying to i-mode Mail <replying i-mode="" mail=""></replying>	191
Forwarding i-mode Mail to Another Receiver	400
<forwarding i-mode="" mail=""> Registering Mail Address/Phone Number to Phonebook</forwarding>	192 192
Playing/Saving an Attached File from i-mode Mail	192
	155
Operating Mail Box	
Displaying Mails in Outbox/Inbox/Unsentbox	
<pre>could control con</pre>	194
Configuring Mail Settings	
Setting FOMA Handset Mail Functions < Mail setting>	201
Using Chatmail	
Creating Chatmail to Send< <creating chatmail="" sending=""></creating>	204
Liebar CMC (Chart Message Constan)	
Using SMS (Short Message Service)	
Creating and Sending SMS (Short Message Service) Message	206
Creating and Sending SMS (Short Message Service) Message <creating sending="" sms=""></creating>	206
Creating and Sending SMS (Short Message Service) Message 	206 207
Creating and Sending SMS (Short Message Service) Message 	207
Creating and Sending SMS (Short Message Service) Message Creating/Sending SMS> Automatically Receiving SMS (Short Message Service) Message Checking for SMS (Short Message Service) Message Checking for SMS (Short Message Service) Message Check SMS>	
Creating and Sending SMS (Short Message Service) Message 	207

Mail Functions of FOMA Handset

FOMA handset provides 2 mail functions: i-mode mail and SMS.

- Using i-mode mail requires i-mode subscription.
- Using SMS requires no i-mode subscription.


Sending and Receiving Mail

FOMA Handset → FOMA Handset



FOMA Handset \rightarrow i-mode Handset of mova Service

SMS sent from FOMA handset is received by i-mode handset of mova service as i-mode mail.



mova service

· If "Report request" is set to "ON", SMS cannot be sent to mova.

i-mode Handset of mova Service → FOMA Handset

Short mail* sent from i-mode handset of mova service can be received by FOMA handset as SMS.



of mova service

- handset
- *: Short mail is a service that allows to send and receive text messages with the mova service handset.

What is i-mode Mail?

Upon subscription to i-mode, you can send and receive messages via internet as well as between i-mode handsets (including mova handsets). The default mail address specified at i-mode subscription is as given below.

<When you have newly subscribed to i-mode>


A combination of random alphanumeric characters is succeeded by @. After subscription to i-mode, check your mail address,

Example: abc1234 ... 789xvz@docomo.ne.ip

Checking your mail address

iMenu" → "ENGLISH" → "Options" → "Mail Settings" → "Confirm Mail Address"

- Between i-mode handsets (including mova handsets), mails can be sent and received using only the address preceding @.
- · When sending mails from PC, etc. to FOMA handset, use the whole address containing @docomo.ne.ip.



- Sending mail →P184
- Receiving mail →P190

Receive option

You can view the subject of mail stored at the i-mode Center and select mail to receive or you can delete mail at the i-mode Center without receiving it. →P191

Mail Setting

You can make various settings as described below.

<Setting procedure>

"iMenu" \rightarrow "English" \rightarrow "Options" \rightarrow "Mail Settings" \rightarrow [Each Setting]

- For details, refer to "Mobile Phone User's Guide [i-mode]" that was provided when you subscribed to i-mode.
- Changing your mail address [Mail Address (Change Mail Address)]

You can change characters preceding mark @ in a mail address, e.g.,

Confirm Mail Address [Mail Address (Confirm Mail Address)]

You can confirm the current mail address.

■ Registering secret code [Mail Address (Other Settings) → Register a Secret Code] When using a mail address of format "mobile phone number@docomo.ne.jp", you can register 4-digit secret code in addition to the mail address. Because mails with no secret code attached are not received, you can avoid receiving unnecessary messages.

■ Resetting mail address [Mail Address (Other Settings) → Reset Mail Address]

You can set your mail address to "mobile phone number@docomo.ne.jp".

Spam Mail Prevention

You can restrict reception of messages by setting mail reception/rejection in one of the procedures given below.

- Reject/Receive Mail Settings [Receiving Mail (Spam Mail Prevention) → Reject/Receive Mail Settings]
 - You can receive mails from one of carriers selected from SoftBank, DoCoMo, au, Tu-Ka and WILLCOM.
 - You can receive mails from the specified domain address of those sent from the carriers other than the above.

(You can reject mail pretending to use a mobile phone or PHS domain from the Internet.)

- (2) SMS Rejection Settings [Receiving Mail (Spam Mail Prevention) → SMS Rejection Settings]
 - You can restrict incoming SMS by selecting one from "SMS—括拒否 (Reject All SMS)", "非通知 SMS拒否 (Reject Anonymous SMS", "国際SMS 拒否 (Reject Intl. SMS) or "非通知SMSと国際 SMSの拒否 (Reject Anonymous and Intl. SMS).
 You can also view the current settings.
- ③ Restricting reception of mails from mass i-mode mail senders [Receiving Mail (Other Settings)→ Reject Mass i-mode Mail Senders]
 - You reject 201st and subsequent i-mode mails sent from one i-mode handset (including mova handset) a day. "Reject" is set by default, so you do not have to change the settings to reject messages sent from mass mail senders.

- ④ Reject Unsolicited Ad Mail [Receiving Mail (Other Settings)→ Reject Unsolicited Ad Mail]
- You reject reception of mails with "Reject Unsolicited Ad Mail" description added to a mail subject which are sent unilaterally for advertisement and/or promotion without agreement of the receiver. "Reject" is set by default, so you do not have to change the settings to reject such messages. (Senders are obligated by law to give description "Unsolicited Ad Mail" (6 full-pitch characters) to the beginning of the mail subject field.
- Limiting mail size [Receiving Mail (Limit Mail Size)]

You can limit i-mode mails to be received with the predetermined size.

Confirm Settings [Receiving Mail (Confirm Settings)]

You can check the current settings of mail reception/rejection and others.

Suspending mail function [Suspend Mail] You can suspend the mail function in the i-mode Center when it is not necessary.

Number of Characters That Can be Sent/ Received

The number of characters that can be sent/ received in i-mode mail is as listed below.

Items	Full-pitch characters (kanji, hiragana characters, pictograph(E-Moji), etc.)	Half-pitch characters (alphabetic numeric, katakana characters, etc.)
Subject	15 characters	30 characters
Destination	-	50 characters
Text	5000 characters	10000 characters

Note

- Up to 5000 full-pitch characters (10000 bytes) can be sent/received in i-mode mail text, but the number of characters that can be sent/received is reduced depending on the data size of an attached file.
- When i-mode mail text exceeds the number of characters that can be received, "/" or "//" is inserted in the end of the text and the excessive part is automatically deleted.
- When sending i-mode mail to a mova handset, the text can contain up to 2000 full-pitch characters.
 Also, i-shot or i-motion mail is sent as a mail containing URL and other attachment files are deleted.
- When the number of characters in a subject exceeds the allowable limit for reception, excessive characters are deleted.

- A pictograph (E-Moji) contained in i-mode mail sent to another mobile phone company (au/SoftBank/ Tu-Ka) will be converted into their similar pictograph (E-Moji) automatically.
 - Depending on the other party's mobile phone model or function, some pictographs (E-Moji) may not be displayed correctly.
 - If the other party's mobile phone does not have an appropriate pictograph (E-Moji), it will be converted to text or "=".

When Mail Cannot be Received

Mail delivered to i-mode Center will be immediately sent to your i-mode handset. Note that, however, when your i-mode handset is turned off or out of the service area, the mail is stored in i-mode Center. Mail stored in i-mode Center is resent up to 3 times with a predetermined interval. Also, Receive Option can also be used to select and receive i-mode mail stored in i-mode Center.

• The maximum number of savable mails and storage period in i-mode Center are as listed below.

	Maximum number of savable mails	Maximum number of storage period
i-mode mails	207 to 1000 mails (Up to approximately 10M byte)	720 hours

- Expired mails are automatically deleted.
- The maximum number of savable mails varies depending on the mail data sizes. When the maximum number of savable mails is exceeded, and (Red) appears on the i-mode handset. At this time, i-mode Center does not receive an mail and returns it to the sender with an error message. Even when the "Receive Option" is set to "On", and (Red) appears if the maximum number of saved mail messages is exceeded.
- You can receive mails stored in i-mode Center by "Check new message" or "Receive Option" settings. Also, when a new mail is delivered, you can receive it together with other mails and Message stored.
- When mail stored in i-mode Center is received, it is deleted from i-mode Center. Received mail is stored on the i-mode handset. →P190
- Mail with an excessive size may not be accepted by i-mode Center.

Other Convenient Functions

File attached mail

Melody attached mail

You can send/receive a melody file downloaded from a site or web site through mail attachment. Note that, however, a melody file whose mail attachment or output from FOMA handset is prohibited cannot be sent.


Sending \rightarrow P189 Receiving \rightarrow P193 Image attached mail

You can send/receive a still image file obtained from a site, web site or external memory through i-mode mail attachment. Note that, however, a still image file whose mail attachment or output from FOMA handset is prohibited cannot be sent. Sending \rightarrow P189 Receiving \rightarrow P193

i-shot

You can send/receive a still image captured with a handset with Camera function to/from i-mode handsets (including mova handsets), PCs or mobile phones of other carriers. It is sent to the receiver as a mail of attachment file format or that containing URL (or icon) for image viewing with an image storage period described. When URL is sent, the image can be acquired by selecting the URL.

A mail text sent to an i-mode handset of mova service can contain up to 184 full-pitch characters (369 bytes). When multiple files are attached, they are deleted and only the mail text is sent. Sending \rightarrow P189 Receiving \rightarrow P193




- *: When a mail containing URL of an attached image is received
- The image is stored in i-shot Center a maximum 10 days and automatically deleted after expiration.
- i-mode handset can send a still image of up to 500K bytes. When a message attached with an image exceeding 20K bytes is sent to an i-mode handset, it acquires an image with its size automatically reduced.

i-motion Mail

You can send/receive videos captured with an i-motion mail compatible handset or those acquired from sites to/from i-motion mail compatible handsets, PCs or mobile phones of other carriers. Note that, however, a video file cannot be sent if its mail attachment or output from FOMA handset is prohibited cannot be sent. Sending \rightarrow P189 Receiving \rightarrow P193

Service scheme

- A video file attached to i-motion mail is sent to and stored in i-motion mail Center.
 If it is for a PC, etc., it is directly sent as an attachment file. When it is received by an i-motion mail compatible handset, a video can be acquired by selecting URL indicated in the message text.
- When a video file attached to i-motion mail is sent to a handset incompatible with i-motion mail, it is received as a mail containing URL with i-motion converted to continuous still images. The receiver can acquire the continuous images by selecting the indicated URL.



(3) Attached image or sequential still image data

- Video is stored in i-motion mail Center for up to 10 days and automatically deleted after expiration.
- An i-motion compatible handset can receive video of a maximum 500K bytes. The size of the received video is automatically converted so that it matches the screen of the i-motion mail compatible handset.

Deco-mail

You can create and send or receive enjoyable i-mode mail edited in a decorative manner such as changing the font size and/or background color or pasting an image in the text. Note that, a decorated mail received from a PC may not appear exactly in the same way as on the PC, because some decorations are not available on i-mode handsets. When a Deco-mail is sent to an incompatible handset, it is received as a mail containing URL. The receiver can view the Decomail by selecting the indicated URL. Editing/Sending ~P186

 Applicable models: Available on Deco-mail compatible handsets. For details, refer to "Mobile Phone User's Guide [i-mode] ".

Simultaneous mail sending

Same i-mode mail can be sent to multiple (up to 5) addresses at a time. \rightarrow P184

 The communication charge is the same as that for sending 1 i-mode mail. Note that the communication charge will increase for the information size of added destinations.

CC or BCC sending/receiving

Similarly to PC, To, Cc and/or Bcc can be selected as destinations. Note that mail with no To destinations cannot be sent. →P185

Chat mail

Mail can be exchanged in a similar manners as chatting with multiple other parties. \rightarrow P204

• The communication charge for exchanging chat mail with multiple other parties is the same as that for simultaneous mail sending.

SMS (Short Message Service)

You can send/receive text messages using only the mobile phone numbers without subscription to i-mode.

Sending \rightarrow P206 Receiving \rightarrow P207 Checking \rightarrow P207

SMS (Short Message Service) Destination

SMS destination is "subscribed mobile phone number".

 For destinations used for sending/receiving SMS to/from overseas carriers other then DoCoMo, visit DoCoMo's web site.

Number of Characters That Can be Sent/ Received

The number of characters that can be sent/ received in SMS is as listed below.

Destination	20 characters (including "+")	
SMS text entry settings	Full-pitch entry (70 characters)	
	Half-pitch entry (160 characters)	
	Half-pitch Katakana entry (70 characters)	
	Half-pitch/Full-pitch mix entry (70 characters)	

When SMS (Short Message Service) Messages Cannot be Received

SMS delivered to SMS Center will be immediately sent to your FOMA handset. Note that, however, when your FOMA handset is OFF or out of the service area, the SMS is stored in SMS Center.

Note

- · The maximum storage period of SMS in SMS Center is 72 hours. The sender can specify the storage period. →P202
- · SMS expired is automatically deleted.
- SMS stored in SMS Center can be received by SMS inquiry. →P207
- When SMS stored in SMS Center is received, it is deleted from SMS Center.

Mail Menu

Displaying Mail Menu

Ø Mail Menu 1/2 a Inbox 2 Outbox 3) Unsentbox ① Compose message ⑤ Compose SMS message ChatMail ⑦Deco-mail template SWAP Check new message Mail Menu screen

Perform the following operations

Inbox

Open the Inbox list screen. →P194

Outbox

Open the Outbox list screen, →P194

Unsentbox

Open the Unsentbox list screen. →P194

Compose message

Create a new i -mode mail. →P184

Compose SMS message

Create a new SMS (Short Message Service) message. →P206

ChatMail

Open ChatMail screen. →P204

· When Chat members are not set, the member setup screen opens. →P204

Deco-mail template

Open the Create new template screen and a list of saved templates. →P189

SWAP

Call up another function from Phonebook or Datebook. →P258

Check new message

Receive i-mode mail stored in i-mode Center by i-mode check. →P191

Check SMS

Receive SMS stored in SMS Center by SMS check. →P207

Receive option

You can check subjects of i-mode mails stored in i-mode Center and select ones to be received or deleted without reception from the i-mode Center. →P191

Mail setting

Set the mail function. →P201

Creating/Sending i-mode Mail

Creating and Sending i-mode Mail

Mail Menu screen (P184)
 "Compose message"



message screen

Select the 🛅 [Receiver] field 🕨 💿 🕨 Enter the receiver

- · You can enter up to 50 half-pitch characters.
- After the receiver is entered, a new [10] [Receiver] field is added automatically allowing you to send multiple recipients. Up to 5 receivers can be entered.

 Select
 [Receiver] field
 [Function] to
 enter a receiver from the Phonebook or sending group. →P185

Select the Sole [Subject] field ♦ (●) ♦ Enter a subject

· Up to 15 full-pitch or 30 half-pitch characters can be entered.

4 Select the [B] [Message] field ● ●
Enter text

• Up to 5000 full-pitch or 10000 half-pitch characters can be entered.

Wc wi actic rrow. lease	e fi If	rom you	11 a can	.m. jo	to in,	no

Message entry screen

5 🗔 [Send]

Note

- To decorate mail →P186
- To send with attached file → P189
- You can insert a new line feed while editing the message text. The line feed is counted as 1 full-pitch character.
- A space is counted as 1 half-pitch character.
- Characters may not be sent correctly to the receiver depending on the radio wave reception level.
- Half-pitch katakana and pictographs (E-Moji) except for mail exchanged between i-mode handsets may not be displayed correctly.
- The secret code is added automatically when the mail whose address is set with the secret code is sent. However, the address of the sent mail does not display the added secret code.
- If the maximum number of messages has been saved in the Outbox and Unsentbox, when the Compose message screen opens, the oldest unprotected sent message will be overwritten first.
- Even if i-mode mail is sent successfully, an error message indicating the mail could not be sent may appear depending on the radio wave reception level.

Function Menu on Compose Message Screen

Compose message screen (P184) ♦ → [Function] ♦ Perform the following operations

Quote phonebook

Select a receiver from a phone book.

♦ Use (1/2) to select a Phonebook entry ♦ ↔ to checkmark to the mail address to select it ♥ in [Complete]

Quote sending grp

Select a receiver from a sent group.

Select a group with here > Checkmark to the address to select it fire [Complete]

Direct input

Directly enter a destination.

Enter the mail address

Send

Send mail.

Save

Save mail being created or edited in Unsentbox.

▶ [Yes]

Select Template

Read a template to create Deco-mail. →P188

Change to To

Change the selected receiver to To. The mail address entered in usual Receiver will be shown to recipients.

Change to Cc

Change the selected receiver to Cc. You can specify additional addresses to send a copy of the same mail to other recipients in addition to the direct recipients. The mail addresses entered in the Cc field will be shown to other recipients.

• The mail address may not be displayed depending on the recipient's handset, device or mail software.

Change to Bcc

Change the selected receiver to Bcc. You can specify addresses of people to receive copies but whose identity will not be shown to other recipients. The mail addresses entered in the Bcc field will not be shown to other recipients.

Delete receiver

Delete a selected receiver.

Note

Quote sending grp

"Registering a Mail Address to a Sending Group"
 → P203

Select template

 If the text is already entered, a confirmation screen whether to delete the text opens. Press here [Yes] to insert a template.

Change to To/Change to Cc/Change to Bcc

 The receiver displayed at the top of the list and any receiver that a mail address is not entered cannot be changed.

Function Menu on Message Entry Screen

Message entry screen (P185) ♦ [Function] ♦ Perform the following operations

Decorate mail Open a palette. →P187

Reset decoration Cancel all of decoration.

Template

Use a template to create Deco-mail. →P189

Сору

Select and copy characters in text or decorations. →P301

Cut

Select and cut characters in text or decorations. →P301

Paste

Paste copied/cut characters to text. →P302

Undo

Restore character entry, deletion, paste, decoration, etc. to the previous state.

Import

import	
Signature	Enter a signature in Message. ♦ Select a signature ♦ ●
Phonebook :	Select mail address from Phonebook and enter them to Message. ♦ Use () to select a Phonebook entry ♦ ↔ to checkmark to the mail address to select it ♦ • [Complete]
Owner Information :	Enter own number from My Personal Info to Message. ♦ Enter the Security Code ♦ ▲ [Insert]
Bookmark :	Enter an URL registered in Bookmark to Message. ♦ Select a folder ♦ ● ♦ Select a Bookmark ♦ ●
Common phrases Select and enter a fixe	ed phrase to Message.

Select and enter a fixed phrase to Message.

Select a common phrase → (Lag) (Select] → Select text
 (Select] → (Lag) (Select)

Entry Mode

Switch the entry mode. →P296

Entry Setup

Set conversion prediction function and character entry.

Japanese Prediction	:	Set the prediction function (Japanese matching/Japanese next word). →P299
English settings	:	Set the English entry method and conversion prediction function (English matching/English next word). →P300
Cursor timeout	•	Set whether to fix characters automatically. →P300
Pitch mode	•	Switch between full-pitch/half- pitch mode. →P300
Default	:	Change default character entry mode. →P300

English functions

Set "English settings" in "Entry Setup" to On or Off at once.

"Turn on"/"Turn off"

Preview

Open preview screen of message.

- [ICK]: Return message edit screen.
- Isave]: Save as Deco-mail template. If [Yes]
 Enter the file name.

Note

Preview

Undecorated text cannot be saved as a Deco-mail template.

Deco-mail

Creating and Sending Deco-mail

You can create your own designer mail by adding decorations such as changing font size, font color or background color, or inserting images when you edit i-mode mail messages.



Decoration being set at the cursor position

Mail Menu screen (P184) "Compose message"

7 Enter the receiver and subject

• Entering the receiver and subject → "Step 2 and 3 in "Creating and Sending i-mode Mail" (P184)

 Message]/[Decorate]: Toggle between decoration palette operation and message text entry.



Palette display screen

4 Use the palette to decorate a message text

Selecting a decoration before entering characters

For operations, see "Decorating Message Text" (P187).

Decorating entered characters For operations, see "Changing decoration" (P188).

5 🗔 [Close]

To view set Deco-mail

[Function] ▶ Select "Preview"

To save user-defined Deco-mail as a template

[Function] ♦ "Preview" ♦ Inc. [Save]

► [Yes] ► Enter a file name

To cancel all the set Decoration

● ◆ 🗔 [Send]

Note

- When Deco-mail is sent to or received from a handset other than Deco-mail compatible i-mode handsets, decorations may not be displayed correctly.
- After decorated text is deleted, the decoration codes may remain and this may result in a reduction in the number of characters available for the text. Cancel any decoration before deleting the text. When text is deleted by pressing (area) for 1+ seconds, the text including any decoration will be deleted.
- If a template contains an image that cannot be sent via email, the image may not be sent.

Decorating the Text

Message entry screen (P185) ▶ _h___ [Function] ▶ "Decorate mail" ▶ Perform the following operations

 Message]/[Decorate]: Toggle between the decoration palette operation and message text entry.



A (Edit decoration)

Specify the range of text to decorate. →P188

• This cannot be selected when no text has been entered in the message.

MA (Font color)

Set a color of characters.

Select color

A (Begin blink)

Make characters blinking.

Enter characters

To stop blink, select → [Decorate]

W (Background color)

Set a background color of mail text.

Select color

(Insert image)

Insert an image saved in "My Pictures" to mail text.

Select the folder ♦ ● Select an image ♦ ●

ဤ (Undo)

Restores a set decoration to previous setting.

Size A (Font size)

Set a font size.

(Large)/ (Standard)/ (Small)

(Word alignment)

Set a position to enter characters or insert an image.

(Left)/ (Center)/ (Right)

A (Begin ticker)

Set a ticker to the text.

Enter characters

- Characters entered between and appear as a telop.
- To end the Telop, select <u></u>[Decorate] A (End ticker).

AA (Begin swing)

Set text to swing.

- Enter characters
- Characters entered between sand swing.
- To end the swing, select <u>I</u>[Decorate] AA (End swing).

Line (Insert line)

Insert a line in mail text.

Copy/Cut/Paste)

(Copy) :	Specify the range and copy text, an image or line. Use to select a start point (Start) Use to select an end point (End)
Ƴ (Cut) ∷	Specify the range and cut the text, image or line. Use to select a start point (Start) Use to select an end point (End)
(Paste)	Paste the copied or cut data after the cursor.

Note

Edit Decoration / Copy / Cut

 When characters with "Ticker" or "Swing" set are selected and "Copy" or "Cut" is carried out, the settings for "Ticker" or "Swing" are not affected.

Font color

 Pictographs (E-Moji) are also displayed in the specified color. To restore the default color, select "Default" from the color palette.

Blink

 If applied, blink is displayed on the preview screen or the Compose message screen, the blink ends after a certain period of time.

Continued on the next page ••• 187

Background color

 Under some background colors, the URL for an image or i-motion movie may not visible.

Insert image

- Up to 10 JPEG or GIF images that together with the text total up to 10000 bytes can be inserted.
- If the same image is inserted multiple times, it is considered that 1 image is inserted. However, an image cannot be inserted if the remaining number of bytes is smaller than the file size of the inserted image.
- An image that is 320×240 or larger cannot be inserted.

Changing Decoration

- - [Select]: Select the entire message. Press
 - [Return]: Re-select a start point.
- 3 Use ↔ to select an end point
 ▲ [End]
 Perform the following operations

Specify range We will have a termits pr actice from 11 a.m. tomo rrow. If you can join, p lease let me know.« Decorate mail Decorate mail

diting decoration en



End the decoration change.

(Font color) Set the color of characters highlighted.

Select color

- A (Select blink · Reset blink) Blink/Cancel the characters highlighted.
- ဤ (Undo)

Restores a set decoration to previous setting.

- Size (Font size)
- Set a font size of characters highlighted.
- (Large)/ A (Standard)/ A (Small)

(Word alignment)

Set a position of the characters highlighted.

(Left)/ (Center)/ (Right)

A (Select ticker · Reset ticker) Set/Cancel the ticker to the characters highlighted.

A (Select swing · Reset swing) Set/Cancel the swing to the characters highlighted.

Template

Creating Deco-mail Using Template

Templates are form data for Deco-mail with decorations such as the font size and image insertion already set. In addition to templates pre-installed, you can use those downloaded from sites.

- Templates pre-installed →P326
- - If the mail has message text entered, the entered text will be deleted and the template will be inserted.
 Press has been presented by the presented of the presented of

Select a template 🕨 🖅 [Select]

- The selected template is inserted in the message text.
- You can edit the message text after inserting a template.

Creating a New Template

Create user-defined templates. Created templates are saved in the "Template list".

Mail Menu screen (P184) ♦ "Deco-mail template" ♦ "Compose template"



Compose template screen

- Create a template
 - Decorating operations →P187
- 3 After creating a template ♦ ♦ ▲
 [Yes] ♦ Enter the file name

Note

• Undecorated text cannot be saved as a template.

Editing Templates

You can edit user-defined templates.

Mail Menu screen (P184) ♦ Deco-mail template ♦ "Template list"

	Template	list	1/
9 Di	mo 1		
②Di	mo2		
3Di	mo3		
④ Na	ture		
(S) Ch	ic		
@Fu	ture		
∂GI	obal		
@ Cy	ber		
т	emplat	e lis	st
	scree	en	

Decorating operations →P187

👌 After editing Template 🕨 🖲

- **Overwrite** : Save the edited template over the source template.
- Save new entry: Save the edited template as a new template.
 - Edit a file name

Function Menu on the Template List Screen

Edit

Edit a template. →P189

Compose message

Create Deco-mail inserting the selected template into the message text. \rightarrow P186

Preview

Display the selected template.

Rename

Change the template name.

Change a file name

Delete

Delete the selected template.

🕨 🕞 [Yes]

Delete all

Delete all saved templates in the Template list.

Enter the Security Code

Note

 If you deleted the pre-installed templates, perform "Reset Mail" to restore the deleted pre-installed templates. →P202

File Attachment

Attaching a File

You can send i-mode mail attached with images or melodies.

File that can be attached

File type	Maximum number of attached files
Melody	
Image of 10000 bytes or smaller (JPEG or GIF)	Total of 10*1
Image over 10000 bytes (JPEG)	One of them* ²
Video/i-motion Movie	

- *1: Up to 10000 bytes (5,000 full-pitch characters) of data including melodies, graphics and message text can be sent with up to 10 files attached. The number of files that can be attached differ depending on their data sizes.
- *2: One of image or video/i-motion of up to 500 K bytes can be attached. It is counted as one, besides melodies and images of 10000 bytes or less.
- A file prohibited to be attached to mail or to be output from FOMA handset cannot be attached.
- When a JPEG format image or i-motion over 10000 bytes is attached, the number of characters that can be entered to text is reduced by 100 full-pitch characters (200 half-pitch characters).
 When decoration is made, it is reduced by 200 fullpitch characters (400 half-pitch characters).
- Compose message screen (P184) ♦ [1] [Attachment] ♦ ● ♥ Perform the following operations

Attach image

Select from images saved in "My Pictures".

♦ Select a folder $\bullet \bullet \bullet$ Select an image $\bullet \bullet \bullet$

Attach i-motion

Select from videos/i-motion movies saved in "i-motion".

Select a folder
 Select a video/i-motion movie

Attach melody

Select from melodies saved in "Melody".

Select a folder (•) Select a melody (•)

Snap photo

Capture and attach a still image.

- Capture a still image
- Jiac [Discard]: Re-capture a still image.

Shoot movie

Capture and attach a video.

- Capture a video
- Iscard: Re-capture a video.

Mai

Note

Attach image

- GIF images cannot be received with an i-mode handset using the mova service.
- An image over 500 K bytes cannot be attached.

Attach i-motion

- A video-clip/i-motion movie over 500 K bytes cannot be attached. Reduce the size under "Compress" to the available size before attaching it. →P237
- Depending on the receiving handset, a video-clip may be displayed coarsely or as sequential still images.
- Some i-motion movies may not be attached.

Attach melody

• Attached melodies cannot be received with an i-mode handset using the mova service.

Snap photo/Shoot movie

 If you select "Snap photo"/"Shoot movie" when a file is attached, a message appears indicating the attached file will be detached. Press
 Image: Continue "Snap photo"/"Shoot movie".

Deleting/Changing an Attached File

Compose message screen (P184) ♦ Select an attached file ♦ ●

Play/Display : Replay/display a selected file.

Change	: Change the file. Go to Step 1 in
	"Attaching a File" (P189).

File properties

- : Display information about a selected file.
- Release : Release a selected file.


Automatic Reception of Mail

When i-mode Mail is Received

When the FOMA handset is in the service area, i-mode mail is automatically sent from i-mode Center.

When i-mode mail is received, Mail (Yellow) goes blinking and "Receiving message" appears

When reception has completed, the reception result screen opens.



 The screen before receiving returns if no operation is performed for approximately 30 seconds on the Reception result screen.

🔪 "Mail"

The Inbox list screen opens.

Note

- When new i-mode mail is delivered, other i-mode mail and/or Message R/F stored in i-mode Center are received at the same time.
- When Receive option for i-mode mail has been set, sent i-mode mail is stored in i-mode Center. You can confirm a subject, etc. of i-mode mail stored in Center and select and receive it. →P191
- When the maximum number of the savable received mails has been exceeded, they are overwritten from the oldest ones. Note that unread or protected mails are not overwritten.
- If mail is sent from a handset that is capable of setting To, Cc, or Bcc, you can check how the mail was addressed to you using the FOMA handset. →P196
- Melodies, video clips and still images can be received as attachments to i-mode mail.
 Incompatible files will be automatically deleted at the i-mode Center. If an attached file is deleted, a message "添付ファイル削除 (Attachment deleted)" is added.
- You can set whether to receive attached melodies or images under "Receive attachment". →P201
- If the size of a received mail exceeds the number of characters set under "iMenu" → "ENGLISH" → "Options" → "Mail Settings" → "Limit Mail Size", the attached file and pasted data will be deleted at the i-mode Center and cannot be downloaded later.
- · Incoming mail is saved at the i-mode Center when:
 - The handset power is turned off
 - A video call is in progress
 - Self Mode is set
 - The handset is out of the service area
 - The handset is connected to the FirstPass Center
 - The "Receive option" is set to "ON"
 - The Inbox is full with protected or unread mail
- If multiple i-mode mail messages or Message R/F are received concurrently, the ringtone set to the i-mode mail or Message R/F received the last sounds.

Displaying New i-mode Mail Received

Reception result screen (P190) 🕈 "Mail"

2 Select a folder ♦ ● ♦ Select mail to be displayed ♦ ●

We will have a tennis pr actice from 11 a.m. ton, lease let me know. ---- k ND---

Inbox detail

Receive Option

Selecting and Receiving i-mode Mail

You can confirm a subject, etc. of i-mode mail stored in i-mode Center and select mail to be received or delete it in i-mode Center before reception.

- To use Receive option, set "Receive option" to "On" in advance. Note that when it is "On", i-mode mail cannot be automatically received. →P201
- (Yellow) appears at the top of the screen when mail is kept at the i-mode Center.
- Mail Menu screen (P184) "Receive option"

2 Select an item for each mail message ▶●

受信 (Download) : Download the selected mail. 削除 (Delete) : Delete the selected mail.

- 保留 (Hold) : Selected mail will be kept at the i-mode Center.
- If there is an attachment, the following icons appear:

lcon	File type
·0	An image is attached.
) See	An i-motion movie is attached.
2	A melody is attached.

• For detail, perform the operations in "Mobile Phone User's Guide [i-mode] ".

Note

 Receive option can also be carried out from "iMenu". Select "iMenu" → "メニュー/検索 (Menu/Search)" → "メール選択受信 (Receive Option)".

- Even with "Receive option" set to "On", all mails are received when "Check new message" is used. When you do not want to receive mails, delete "Mail" from the inquiry items. →P201
- If mail is received from the Receive option screen or "Check new message" is performed, (c) (vellow) that is displayed at the top of the screen disappears. It also disappears when the FOMA handset is turned off.

Check new message

Checking for i-mode Mails

i-mode mails, if any, that could not be received because FOMA handset was out of the service area or for other reasons are stored in i-mode Center. You can receive stored i-mode mails by checking to i-mode Center.

- We (Yellow) appears on the screen when mail is kept at the i-mode Center.
- You can select items to check (mail or Message R/F) under "Check new message" (P201).
- · You cannot inquire from out of the service area.
- Press 🖾 twice in a row

When check has completed, the reception result screen opens.

Note

- Even when i-mode mail is kept at the i-mode Center,
 (Yellow) may not appear on the screen if mail arrived while the FOMA handset power was turned off.
- When the maximum number of the savable received mails has been exceeded, they are overwritten from the oldest ones. Note that unread or protected mails are not overwritten.

Replying i-mode Mail

Replying to i-mode Mail

You can reply to i-mode mail sender. Replying can be made by entering new text or quoting the text of received i-mode mail.

- Received mail list screen (P194)/Inbox detail screen (P194) ♦ "Reply"/"Reply w/quotation"
 - You can reply to mail also by pressing is [Reply] on Inbox detail screen.
 - When the mail be sent to receivers other than you simultaneously, you can select "Sender" or "All".

Entering subject and message (•)

• "Re:" is added to a subject.

Mai

Continued on the next page ••• [9]

- When replying by quoting, ">" is added to the beginning of quoted message.
- Editing subject and message → "Creating and sending i-mode mail" (P184).
- 3 (in [Send]

Note

- When the storage capacity of Outbox has been exceeded, replying cannot be made. Delete mails saved in Outbox before replying.
- The reply to received Deco-mail with quotation has original decoration and images entered in the message text. However, restricted images and highlighted URLs will not be quoted.

Forwarding i-mode Mail

Forwarding i-mode Mail to Another Receiver

You can forward received i-mode mail to another receiver.

Received mail list screen (P194)/Inbox detail screen (P194) ♦ → [Function] ♦ "Forward"

🕨 Enter a receiver 🕨 🖲

- "Fw:" is added to a subject.
- Editing a receiver and text → "Creating and sending i-mode mail" (P184)

, 🚺 [Send]

Note

- When a file whose mail attachment or output from FOMA handset is prohibited has been attached or pasted to i-mode mail forwarded, such file and information are deleted.
- When the storage capacity of Outbox has been exceeded, forwarding cannot be made. Delete mails saved in Outbox before forwarding.
- The forwarded Deco-mail has original decoration and images entered in the message text. However, restricted images and highlighted URLs will not be forwarded.

Registering Mail Address/ Phone Number to Phonebook

Registering Sender's Address or Recipients' Addresses in the Phonebook

You can register the email address or phone number of the sender of the received mail or other recipients' addresses to the Phonebook.

 If the mail address is saved in the Phonebook, the name in the Phonebook appears. To view the mail address, press

 <u>h</u>
 [Detail].



Select address(es) to register • • • •

Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97).

Note

- On the Check address screen, the following items can be set:
 - Compose message →P184
 - Auto sort →P202
 - Register sending group →P203
 - Copy E-mail

Registering Email Address, Phone Number, or URL Displayed in Message Text to Phonebook

Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97).

Playing/Saving an Attached File from i-mode Mail

You can play or save an image, melody, video or i-motion movie attached or pasted to i-mode mail or Message R/F.

Displaying/Saving Images

• • • : Display the selected attachment.

Attachment list I/T. © 図 31-10-06_1246.jpg 3,3/8 ◎ 図 31-10-06_1206.mld 2.6KB

Attachment list screen

9 Select an attachment file ♦ I (Save)

"Save" "microSD"/"Phone Memory"

Enter a file name

The file is saved in the "i-mode/Other" folder in "My Pictures" of the "Databox".

• The Soft key [Save] does not appear for an image over 10000 bytes.

When a JPEG image over 10000 bytes is received

When i-mode mail with a JPEG image over 10000 bytes attached is received, the image is automatically saved in "i-mode/Other" under "My Pictures".

- If an image over 10000 bytes cannot be received due to signal reception, a URL to download the image is displayed on the Inbox detail screen.
 Select a URL ♦ Press ● ▲ [Connect].
- If you attempt to download an image over 20000 bytes, the image is automatically compressed before being downloaded.

Note

 The size of an image larger than that of the Display is reduced for display.

Playing/Saving Melodies

- • : Play the selected attachment.
- Select an attachment file
 - "Save" "microSD"/"Phone Memory"

Enter a file name

The file is saved in the "i-mode/Other" folder in "Melody" of the "Databox".

Note

- If a mail message has multiple files attached, the attachments may not be displayed.
- When "Melody auto play" or "Message attached melody" is set to "Auto play", the melody is played automatically when an i-mode mail or Message R/F is received.

Function menu on the Attachment List Screen

Attachment list screen (P193) ♦ [Function] ♦ Perform the following operations

Set

Preview	Play the attached melody (melody only).
Save	: Save the attached file.
	"microSD"/"Phone Memory" Enter a file
	name
Exit	Return to the Attachment list screen.

File properties

Display information about a selected attachment.

Delete

Delete the selected attachment.

▶ ▲ [Yes]


Note

Set


 The Soft key [Save] does not appear for a JPEG image over 10000 bytes.

Playing/Saving Videos/i-motion Movies

Select a highlighted URL in i-mode mail or Message R/F to download i-motion movie saved at the i-motion center.

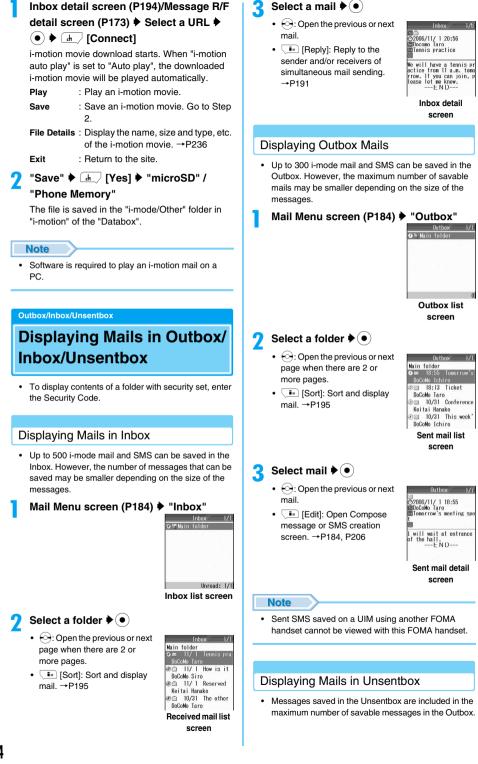

Ma

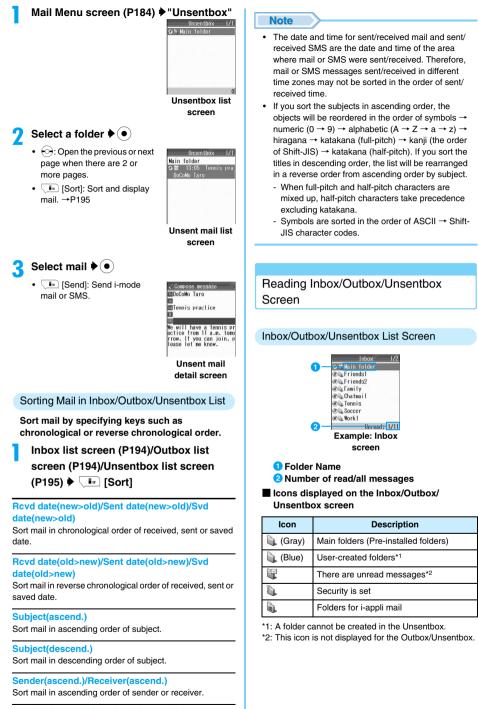


Sender(descend.)/Receiver(descend.)

Sort mail in descending order of sender or receiver.

Outbox/Inbox/Unsentbox

Inbox List Screen/Inbox Detail Screen



Displayed folder name

2 Receiver type

Indicate the receiver type of the received mail (To, Cc, or Bcc).

3 Received date and time

On the Inbox list screen, messages received before today have the date displayed, and messages received today have the time displayed.

Sender's phone number/mail address

If the phone number or mail address is saved in the Phonebook, the name in the Phonebook appears.

5 Subject

A subject is not displayed for SMS.

Icons displayed on the Inbox list screen/Inbox detail screen


lcon	Description
X	Unread mail
8	Read mail
	Unread SMS
	Read SMS
	Protected mail
	Protected SMS
66	Replied mail/SMS
<u>é</u> é	Forwarded mail/SMS
	SMS saved on the UIM card
	Attachment with UIM operation restriction activated
e e \$	Attachment downloaded (image/image over 10000 bytes/melody)
	Deleted file under "Check attachment"
<i>d</i>	Mail-linked i-appli

Icons displayed on the Inbox detail screen

lcon	Description
То	"To" addressee
Cc	"Cc" addressee
Bcc	"Bcc" addressee
0	Received date and time
Form	Sender's phone number/mail address
Sub	Subject*
	Message text

*: Subject is not displayed for SMS.

Outbox List Screen/Outbox Detail Screen



Displayed folder name

2 Sent date and time

On the Outbox list screen, messages sent before today have the date displayed, and messages sent today have the time displayed.

3 Recipient's phone number/mail address If the phone number or mail address is saved in the Phonebook, the name in the Phonebook appears.

4 Subject

A subject is not displayed for SMS.

Icons displayed on the Outbox list screen/ Outbox detail screen


lcon	Description
	Sent mail
	Sent SMS
	Protected mail
BITE _	Protected SMS
B	Attachment with UIM operation restriction activated
	Attachment (image/image over 10000 bytes/melody/i-motion)

Icons displayed on the Outbox detail screen

Icon	Description
0	Sent date and time
То	Mail sent to "To" addressee
Cc	Mail sent to "Cc" addressee
Bcc	Mail sent to "Bcc" addressee
Sub	Subject*
	Message text

*: Not displayed for SMS.

Unsentbox List Screen/Unsentbox Detail Screen



Saved date and time

On the Unsentbox list screen, messages saved before today have the date displayed, and messages saved today have the time displayed.

2 Recipient's phone number/mail address

If the phone number or mail address is saved in the Phonebook, the name in the Phonebook appears.

3 Subject

A subject is not displayed for SMS.

Icons displayed on the Unsentbox list screen/ Unsentbox detail screen

Icon	Description
1	Saved mail
	Saved SMS
ß	Attachment with UIM operation restriction activated
	Attachment (image/image over 10000 bytes/melody/i-motion)
2	Failed to send mail
	Failed to send SMS

Icons displayed on the Unsentbox detail screen

lcon	Description
То	Phone number/mail address set as "To"
Cc	Mail address set as "Cc"*
Bcc	Mail address set as "Bcc"*
Sub	Subject*
	Attachment (image/image over 10000 bytes/melody/i-motion movie)*
	Message text

*: Not displayed for SMS.

Function Menu on Inbox/Outbox/Unsentbox List Screen

Create folder*

Create a folder.

Enter folder name

Edit folder name*

Edit a selected folder name.

Enter folder name

Auto sort*

Set mails to save them automatically in specified folders. $\rightarrow \mbox{P202}$

Sort folders

Sort folders.

Set security/Release security

Set or release security to the selected folder. Setting security requires the Security Code entry to view the contents of the folder.

Enter the Security Code

Delete folder*

Delete a selected folder.

Mail list

Display contents of a selected folder.

Delete all entries

Delete all mail in Inbox/Outbox/Unsentbox.

Send all entries

Send all received mail/send mail/unsent mail via Infrared or Bluetooth.

- Infrared : Send via infrared communication. Go to Step 2 in "Sending All Data" (P255).
- Bluetooth : Send via Bluetooth.
 - ♦ Enter the Security Code ♦ Enter the authentication password ♦ Go to Step 2 in "Registering and Connecting a Bluetooth Device" (P273).
- *: Not available for the Unsentbox.

Note

Edit folder name/Auto sort/Sort folders/Delete folder

 These options are not available with the preinstalled Main folder.

Delete folder

- A folder containing protected mails cannot be deleted.
- When there is a mail-linked i-appli, the folder for i-appli cannot be deleted. If there is no i-appli, the folder for i-appli mail can be deleted, however, created folders in Inbox/Outbox/Unsentbox lists will be also deleted.

Delete all entries

 Protected mails or SMS saved in UIM are not deleted. For a folder with security set, a confirmation message appears asking whether to delete it. Press
 [] [Yes] to delete the folder.

Send all entries

• "Send all entries" is not available if only SMS messages are saved on the UIM.

Function Menu on Inbox List Screen

Inbox list screen (P194) ♦ Select mail ♦ ____ [Function] ♦ Perform the following operations

Reply Reply to mail. →P191

Reply w/quotation

Reply to received mail quoting its contents. →P191

Forward Forward mail. →P192

Search

Search for received mail under set conditions.	
Search unread :	Search for only unread mails.
Search read :	Search for only read mails.
Search protected:	Search for only protected mails.

- Search attached : Search for only mails with file attached.
- To perform Re-search/Release search, on the list screen after search, select (♣)[Function] ♥ "Search".

Protect/Release

Protect or release mail.

- · To cancel protection, select from of the following items:
- Release : Release the selected mail.
- Release all : Release all mail.
 - [Yes]

Move to folder

Move mail to another folder.

Move	 Move the selected mail to another folder. Select a destination folder . [Select] . [Yes]
Move multiple :	 Select and move multiple mail messages to another folder. Checkmark to mail to move Exec.] Select a destination folder Select] Select]
Move all	 Move all mail in the folder to another folder. Select a destination folder . [Select] . [Yes]

Switch display

Select information to be displayed on received mail list screen.

"Date/Subj./Sender"/"Date/Sender"/"Subject/ Sender"

Check address

Display addresses of the sender and simultaneous receivers of a selected mail. \rightarrow P192

IrDA/Bluetooth

Send selected mail via Infrared or Bluetooth.

▶ 上 [Yes]

- Infrared : Send 1 message via Infrared.
- Bluetooth : Send via Bluetooth. Go to Step 2 in "Registering and Connecting a Bluetooth Device" (P273).

UIM

Copy or move a selected SMS to UIM/FOMA handset.

Move to UIM :	Move SMS to UIM. ♦ ⊕ [Yes]
Copy to UIM :	Copy SMS to UIM. ♦ ⊕_ [Yes]
Move to Phone :	Move SMS to the handset.
Copy to Phone :	Copy SMS to the handset. ♦ ♠ [Yes]

Delete

Delete	:	Delete a selected mail.
Delete multiple	:	Select and delete multiple mail messages.
Delete all	:	 Delete all messages in the folder. ♦ Enter the Security Code ♦ → [Yes]

Function Menu on Inbox Detail Screen

Inbox detail screen (P194) ♦ [Function] ♦ Perform the following operations

Reply

Reply to mail. →P191

Reply w/quotation

Reply to received mail quoting its contents. →P191

Forward

Forward a mail →P192

Сору

Copy a component of displayed received mail.

Address : Copy the mail address. If there are multiple recipients, copy an address from the Check address screen. →P192

Subject : Copy the subject.

Message : Select and copy a part of the message text. →P301

Protect/Release

Protect or release the displayed mail.

Scroll

Set a number of lines to be scrolled. →P202

Font size

Set a font size. →P202

Save to template

Save Deco-mail as a template.

IYes] Enter the file name

Move to folder

Move the displayed mail to another folder.

Select a destination folder . [Select]

Check address

Display addresses of the sender and simultaneous receivers of a received mail in display. \rightarrow P192

Check image

Save images contained in the displayed mail. Select an image then go to Step 2 in "Saving Images from a Site or Message" (P168).

Check attachment

List files attached to the displayed message. \rightarrow P193

IrDA/Bluetooth

Send displayed mail via Infrared or Bluetooth.

```
♦ 🖅 [Yes]
```

- Infrared : Send 1 message via Infrared.
- Bluetooth : Send via Bluetooth. Go to Step 2 in "Registering and Connecting a Bluetooth Device" (P273).

UIM

Copy or move a displayed SMS to UIM/FOMA handset.

Move to UIM :	Move SMS to UIM. ♦ 👍 [Yes]
Copy to UIM :	Copy SMS to UIM. ▶ ⊕ [Yes]
Move to Phone :	Move SMS to the handset.
Copy to Phone :	Copy SMS to the handset. ♦ ▲ [Yes]

Delete

Delete a displayed mail.

♦ 🖅 [Yes]

Save in Phonebook

Save the phone numbers and email addresses highlighted in the displayed mail phonebook. \rightarrow P192

View URL

Display the URL of an image that is larger than 10000 bytes, attached to i-mode mail.

Image: Copy]: Copy URL.

Note

Protect

• Up to 250 mails can be protected.

Save to template

• A large-size still image file or melody file attached to Deco-mail is deleted when saving the mail.

Delete

Protected mails cannot be deleted.

Function Menu on Outbox List Screen

Outbox list screen (P196) ♦ Select a mail ♦ ____ [Function] ♦ Perform the following operations

Edit

Edit and send a sent mail. →P184, P206

Search

Search for sent mail under set conditions.

Search protected: Search only protected mails.

Search attached : Search only mails with file attached.

• To perform Re-search/Release search, on the list screen after search, select ▲ [Function] ◆ "Search".

Protect · Release

Protect or release mail.

- · To cancel protection, select from of the following items:
- Release : Release the selected mail.
- Release all : Release all mail.
 - ♦ 👍 [Yes]

Move to folder

Move mail to another folder.

Move	:	Move the selected mail to another folder. Select a destination folder [Select] [Yes]
Move multiple	:	Select and move multiple mail messages to another folder. Checkmark to mail to move [Exec.] Select a destination folder (Select] (Yes)
Move all	:	Move all mail in the folder to another folder. Select a destination folder [Select] [Yes]

Switch display

Select information to be displayed on Outbox list screen.

"Date/Subj./Rcvr"/"Date/Receiver"/"Subject/ Receiver"

Check address

Display addresses of the sender and simultaneous receivers of a selected mail. \rightarrow P192

IrDA/Bluetooth

Send selected mail via Infrared or Bluetooth.

♦ 🖅 [Yes]

Infrared : Send 1 message via Infrared.

Bluetooth : Send via Bluetooth. Go to Step 2 in "Registering and Connecting a Bluetooth Device" (P273).

UIM

• Not available for Outbox.

Delete

Delete	:	Delete a selected mail.
Delete multiple	:	Select and delete multiple mail messages.
		 Checkmark to mails to delete [Exec.] [Yes]
Delete all	:	 ▶ Enter the Security Code ▶ [Yes].

Function Menu on Outbox Detail Screen

Outbox Detail screen (P194) ♦ → [Function] ♦ Perform the following operations

Сору

Copy contents of a displayed sent mail.

Address :	Copy a destination. When there are
	simultaneous receiver addresses, copy
	destinations from sent mail address
	confirmation screen. \rightarrow P192

Subject : Copy a subject.

Message: Select and copy contents of text. →P301

Protect · Release

Protect or release the displayed mail.

Scroll

Set a number of lines to be scrolled. →P202

Font size

Set a font size. →P202

Save to template

Save Deco-mail as a template.

[Yes] Enter the file name

Move to folder

Move the displayed mail to another folder.

Select a destination folder . [Select] . [Yes]

Check address

Display addresses of the sender and simultaneous receivers of a sent mail in display. \rightarrow P192

Check image

Save images contained in the displayed mail. Select an image then go to Step 2 in "Saving Images from a Site or Message" (P168).

Check attachment

List files attached to the displayed message. →P193

IrDA/Bluetooth

Send displayed mail via Infrared or Bluetooth.

▶ ▲ [Yes]

Infrared : Send 1 message via Infrared.

Bluetooth : Send via Bluetooth. Go to Step 2 in "Registering and Connecting a Bluetooth Device" (P273).

UIM

· Not available for Outbox.

Save in Phonebook

Save the phone numbers and email addresses highlighted in the displayed mail to Phonebook. \rightarrow P192

Delete

Delete a displayed mail.

♦ 🖅 [Yes]

8

Note

Protect

· Up to 150 mails can be protected.

Save to template

 A large-size still image file or melody file attached to Deco-mail is deleted when saving the mail.

Delete

· Protected mails cannot be deleted.

Function Menu on the Unsentbox List Screen

Unsentbox list screen (P195) ♦ Select mail ♦ → [Function] ♦ Perform the following operations

Search

Search for unsent mail under set conditions.

- Search sndg failed : Search only failed to send mail.
- Search unsent : Search only unsent mail.

Search attached : Search only mail with attachments.

- To perform re-search/release search on the list screen after search, select] [Function] "Search".
- alter search, select \underline{r} [Function] V Se

Move to folder

· This is not available for the Unsentbox list screen.

Switch display

Select information to be displayed on the Unsentbox list screen.

"Date/Subj./Rcvr"/"Date/Receiver"/"Subject/ Receiver"

Check address

Display the address of the recipient or addresses of recipients of the selected mail. \rightarrow P192

IrDA/Bluetooth

Send the selected mail via Infrared or Bluetooth.

- Infrared : Send 1 message via Infrared.
- Bluetooth : Send via Bluetooth. Go to Step 2 in "Registering and Connecting a Bluetooth Device" (P273).

UIM

Not available for Unsentbox.

Delete

 Delete
 : Deletes the selected message.

 ▶ ▲ [Yes]

 Delete multiple:
 Select and delete multiple mail messages. Checkmark to mails to delete

 ▶ ■ [Exec.] ▶ ▲ [Yes]

Delete all/Delete all searched

- : Delete all mail in the folder.

Mail setting

Setting FOMA Handset Mail Functions

Default	Check new message: Checked All Receive attachment: Image and Melody Receive option: OFF Melody auto play: Auto Play Receive preference: Prefer receive notice Edit quotation mark: > Font size: Standard Scroll: 1 line
---------	--

Mail Menu screen (P184) 🕈 "Mail setting"

Mail setting 1/ O Check new message © Receive attachment ® Receive attachment © Receive performence © Melody auto play © Receive preference © Signature UEdit quotation mark @ Fort size @ Scroll Mail setting

screen

Perform the following operations

Check new message

Set items to be checked for "Check new message".

Checkmark to the items to check ♦ in [Complete]

Receive attachment

Set attachment files to be acquired when receiving mail, Message $\mbox{R/F},$ etc.

Image and melody:	Acquire images and melodies.
Image :	Acquire only images.
Melody :	Acquire only melodies.
Not receive :	Acquire no attachment files.

Receive option

- Set whether to set Receive Option.
- **ON** : Do not automatically receive mails.
- OFF : Automatically receive mails.

Melody auto play

Set whether to automatically replay a melody attached or pasted to a mail received and displayed.

"Auto play"/"Not auto play"

Receive preference

Set whether to display a receiving or reception result screen of a mail or Message R/F received during FOMA handset operation.

Prefer receive notice :	Open the Receiving screen and
	Received result screen.
Prefer user operation :	Give priority to the operation of the FOMA handset without displaying the Receiving screen and Received result screen.

Continued on the next page ••• 201

Signature

Set a signature to be inserted to mail text. →P203

Edit quotation mark

Set a symbol indicating quotation from a received mail used for replying by quoting.

Enter quotation mark

Font size

Set a font size for text on mail display screen.

"Large"/"Standard"/"Small"

Scroll

Set a number of lines to scroll the screen on a mail detail or mail creation screen.

"1 line"/"3 line"/"5 line"/"1/2 page"/"1 page"

Reg. sending group

Register a mail address of a group. You can send a mail simultaneously to multiple members registered in the group. →P203

SMS report request

Set whether to request for SMS delivery notification for SMS sent. \rightarrow P207

SMS message validity

Set duration SMS is preserved in SMS Center. →P208

SMS Center

Set SMS Center access point. →P208

Mail status request

Confirm the contents set in "Mail setting".

Reset mail

Reset the contents set in "Mail setting" to the default.

Enter the Security Code . [OK]

Note

Receive attachment

• If an attachment that is set to not be received is received, the attachment will be deleted at the i-mode Center and "添付ファイル削除 (Attachment deleted)" is added to the message text. The deleted file cannot be downloaded later.

Receive option

 When this option is set to "ON", i-mode mail cannot be received automatically. Incoming i-mode mail is kept at the i-mode Center, and with (Yellow) appears on the screen.

Reset Mail

 Performing "Reset Mail" restores deleted preinstalled Deco-mail templates.

Auto sort

Sorting Sent/Received Mails Automatically to Folders

Set conditions for automatically saving mails in specified folders.

- This option is not available with the pre-installed Main folder.
- Inbox list screen (P194)/Outbox list screen (P194) ♦ Select a folder ♦ _____ [Function] ♦ "Auto sort"
 - To change a filtering rule Select a rule ◆ ● ◆ ▲ [Yes] ◆ Go to Step 2.



Perform the following operations

Sender address • Receiver address Set mail address as a sort keys.

Quote phonebook	Select and set from a phonebook. Use () to select a Phonebook entry • O to checkmark to the address/phone number to select it • • • [Complete]
Quote sending grp	Select and set from send groups. ♦ Use ↔ to select a group ♦ Select a receiver
Direct input	Directly enter and set a mail address.

Subject

Set a mail subject as a condition.

Enter a subject

All inbox messages • All outbox messages Sort all received/sent mails to a selected folder.

🚺 🚺 [Complete]

Note

• The same sorting conditions as ones set to another folder cannot be set.

Deleting an Auto Sort Rule

Auto sort screen (P202) Select a rule to delete (Delete) Perform the following operations

Delete

Delete the selected Auto sort rule.

🕈 🖃 [Yes]

Delete all

Delete all rules set to the selected folder.

Enter the Security Code

Signature

Adding a Signature to Mail

Default Off

Set a signature to be inserted to mail text.

Mail setting screen (P201) + "Signature"



Signature setting screen

2 Select a signature ♦ ● ♦ Enter a signature

Register Sending Group


Registering a Mail Address to a Sending Group

Register a mail address of a group. Up to 5 mail address can be registered for a group. You can send a mail simultaneously to multiple members registered in the group.

Mail setting screen (P201) ♦ "Reg. sending group"

Send i	ng	group	list
🛛 Group	1		
@ Group	2		
③ Group	3		
(4) Group	4		
(5) Group	5		
@ Group	6		
(7) Group	7		
(e) Group	8		
() Group	9		

list screen





"[Unregistered]" Perform the following operations

Quote phonebook

Select and register from a phonebook.

♦ Use (∑) to select a Phonebook entry ♦ ↔ to checkmark to the mail address and to select it ♦ in [Complete]

Quote sending group

• This is not available for registering to a sending group.

Direct input

Directly enter a mail address.

Enter a mail address



Function Menu on Sending Group List Screen

Sending group list screen (P203) ♦ Select a group ♦ []→ [Function] ♦ Perform the following operations

Edit group name

Edit a group name.

Enter a group name

Delete

Delete the addresses/group name saved in a selected group.

♦ 📕 [Yes]

Deleting an Address Saved in a Group

Register sending group screen (P203) ♦ Select an address ♦ (h) [Delete] Perform the following operations

Delete

Delete the selected address.

▶ ि [Yes]

Delete all

Delete all addresses registered in a group.

Creating Chatmail to Send

Chat mail allows you to exchange mail among multiple other parties on a single screen. The Chatmail screen opens as follows:



Entry box

Up to 250 full-pitch or 500 half-pitch characters can be entered.

2 Member name

Members are displayed in set nick names and colors.

- If a nick name is not saved, the mail address is displayed.
- If sending fails, "送信失敗 (Failed to send)" is displayed next to the member name.

Chatmail history


Up to 50 history entries are displayed. Oldest entries over 50 will be overwritten first.

Setting chat members

Setting Chat Members

To perform Chatmail, you need to register mail addresses to chat members in advance.

Up to 5 chat members can be saved.



Perform the following operations

Quote phonebook

Select a member from the Phonebook.

▶ Use () to select a Phonebook entry ▶ ↔ to select and checkmark to a mail address ▶ I (Complete)

Direct input

Enter a mail address of a member directly.

Enter a mail address

Quote sending grp

Select a member from sent groups.

★ [Yes] ★ Use ↔ to select a sending group and checkmark to a member to select ★ inc [Complete]

Go to Step 6.

"Nickname" 🕨 Enter a nickname

Enter up to 4 full-pitch or 8 half-pitch characters.

Nickname	
DoCoMo T	
Address	
docomo.ta	aro.∆∆@docomo
Font Colo	n

"Receiver" 🕨 Enter the mail address

- The address entered using "Phonebook Search" or "Direct Input" is automatically displayed.
- Font color" Select a font color
 [Select]

[Complete]

Checkmark to members to whom you want to send Chatmail.

- To delete a stored member
 - IFunction] ► Select "Delete".
- To edit a stored member

IFunction] ▶ Select "Edit" and perform Step 3.

■ Specify your nickname and font color "ME" ◆ ▲_ [Function] ◆ Select "Edit" and perform Step 3.

✓ Image: [Complete]



Quote sending grp

 Selecting a member using Quote sending grp deletes all members already set up. Press (h) [Yes] to set up a new member using Quote sending grp.

Editing/Deleting a Member

On the Member setting screen, you can add, edit or delete a member.

Chatmail screen (P205) 🕨 👍

[Function] "Member setting"

The Member setting screen opens.

Select a member • [Function] • Perform the following operations

a

Register new entry

Set up a new chat member. Go to Step 2 in "Setting Chat Members" (P204)

Edit

Edit a nickname, mail address or font color of a member. Go to Step 3 in "Setting Chat Members" (P204)

Delete

Delete a stored member.

- Delete : Delete the selected member.
- Delete all : Delete all stored members. Enter the Security Code

Note

· You cannot register an already saved address to another member.

Creating and Sending Chatmail

 When "Receive option" is "ON", you cannot use chat mail. Set "Receive option" to "OFF".

Mail Menu screen (P184) "ChatMail"



Enter characters



🛋 [Send]

A sent Chatmail opens on the top of the screen.



sending chatmail

Receive Chatmail

Incoming Chatmail is displayed at the top of the screen. Repeat Steps 2 - 4 to exchange Chatmail.

[Interpretending Function] Image: "Quit chatmail"

- [Yes]: Delete Chatmail and terminate.
- INo]: Save Chatmail in the Inbox and terminate.

Receiving Chatmail

When Chatmail is received, M (vellow) appears and the Reception result screen (P190) opens. The received Chatmail is saved in the Inbox.

Inbox list screen (P194) Select a folder ▶(●)

	Int	iox 1/2
Main	folder	
98	11/2	チャットメール
DoC	oMo Tar	
20	11/1	Good work
DoC	oMo Sir	0
30	11/1	I reserved
Kei	tai Han	ako
1	10/31	The other
DoC	oMo Tar	0

Select "Chatmail" (•)

When the sender is registered as a Chat member

A confirmation screen whether to start Chatmail opens. Press 4 [Yes] to start it. Press [No] to open it as i-mode mail.

When the sender is not registered as a Chat member

A confirmation screen whether to save the sender as a Chat mail member opens. Press [H] [Yes] to save the sender as a member. Press [No] to open it as i-mode mail.

Note

- · Under the following circumstances, a message is recognized as Chatmail:
 - The address of the sender or recipient is registered as a Chat member
 - The subject line contains "チャットメール (Chat mail)"
- The Chat mail received on the Chatmail screen is marked as read in the Inbox.
- Even if the received Chatmail has an attachment, only the message text is displayed on the Chatmail screen.
- Communication charge for exchanging Chatmail with multiple other parties is the same as that for sending 1 mail. Note that the communication charge will increase for the information size of added destinations.

Function Menu on Chatmail Screen

Chatmail screen (P205) [Function] Perform the following operations

Continued on the next page ••• 205

Send

Send Chatmail.

Renewal

Receive Chatmail.

Check recent rcver

Confirm destination of the latest mail.

Jest is [Set]: Set a member. Checkmark to a member to set
 Jest is a member. Checkmark to a member to set

Member setting

Open the Member setting screen. You can add, edit or delete members. \rightarrow P204

Delete chatmail

Delete a chat mail.

Quit chatmail

End chat mail.

- [Yes]: Delete Chatmail and terminate.
- Jix [No]: Save Chatmail in the Inbox and terminate.

Change font size

Change a font size used for chat mail to small font/standard font.

Note

Renewal

 When "Renewal" is performed, the Reception result screen will not open when i-mode mail or SMS is received. It will be saved in the Inbox.

Creating/Sending SMS

Creating and Sending SMS (Short Message Service) Message

 You can send and receive SMS to/from parties of overseas carriers other than DoCoMo. Visit DoCoMo's web site for countries and overseas carriers available.

Mail Menu screen (P184) ♦ "Compose SMS message"



Select [Receiver] field •• • Enter a phone number

 Select and enter from a phonebook, received mail address history, sent mail address history or profile. →P206

Select ■ [Message] ► ● ► Enter a message

🚺 🚺 [Send]

Note

- For a destination of an overseas carrier other than DoCoMo, enter in the order of "+" (Press <u>'0%</u> for 1+ seconds), "Country Code" and "other party's mobile phone number". For the mobile phone number, omit leading "0", if exist. Numbers may be entered in the order of "010", "Country Code" and "other party's mobile phone number" (to reply to overseas SMS received, enter "010").
- Characters may not be sent correctly to the other party depending on the radio wave reception level.
- When you send an SMS that the text is consisted of half-pitch alphanumeric characters only or spaces only and the receiver replies to the SMS, other than half-pitch alphanumeric characters may not be entered.
- When you send an SMS to a receiver who uses a foreign carrier and the characters not supported by the carrier are included in the text you sent, those characters may not be displayed correctly.
- Even if you set "Caller ID" to "Hide ID", your Caller ID is sent to the other party.
- When the maximum number of the savable sent mails is exceeded, they are overwritten from the oldest ones. Note that protected mails are not overwritten.
- You cannot reply to SMS sent with Unknown ID or from a public phone.

Function Menu on SMS Creation Screen

SMS creation screen (P206) ♦ [Function] ♦ Perform the following operations

Quote phonebook

Select a destination from phonebook.

Select a Contact (•)

Quote sending grp

This option is not available on the SMS creation screen.

Quote profile

Enter your own number in the Receiver field.

Direct input

Enter the receiver directly.

Enter a phone number

Send

Send SMS.

Save

Save SMS being created or edited in Unsentbox.

SMS report request

Set whether to request for SMS delivery notification when SMS is sent. \rightarrow P207

Message validity

Set a period a sent SMS is stored in SMS Center. →P208

Receiving SMS

Automatically Receiving SMS (Short Message Service) Message

When FOMA handset is in the service area, SMS is automatically received.

 Up to 500 received SMS messages including i-mode mail can be saved. However, the savable number depends on the amount of the data.

When SMS is received, and (Yellow)

goes blinking and "Receiving SMS" opens

When the reception has completed, the reception result screen opens.



 Returns to the Wallpaper screen if no operation is performed for 30 seconds.

> Received result screen

Note

 When the maximum number of the received mails has been exceeded, they are overwritten from the oldest ones. Note that unread or protected mails are not overwritten.

Displaying New SMS Received

Reception result screen (P207) ♦ "Mail" ♦ Select a folder ♦ ● Select SMS to display



Check SMS

Checking for SMS (Short Message Service) Message

SMS, if any, that could not be received because FOMA handset was out of the service area or for other reasons are stored in SMS Center. You can receive stored SMS by checking to SMS Center.

- You cannot check from out of the service area.
- Mail Menu screen (P184) 🕨 "Check SMS"

When the reception has completed, the Reception result screen opens.

Note

 When the maximum number of the received mails has been exceeded, they are overwritten from the oldest ones. Note that unread or protected mails are not overwritten.

SMS Settings

Configuring SMS (Short Message Service) Message Settings

SMS Report Request

Default OFF

Set whether to request an SMS delivery report after sending SMS. If this option is set to "ON", a message indicating that the SMS has been delivered to the receiver will be sent to you.

Mail setting screen (P201)
 "SMS report request"
 "ON"/"OFF"

Note

• The report will show the sent time and the number of the receiver.

SMS Message Validity

Default For 3 days

Set the length of time that a sent SMS will be kept at the SMS center if it cannot be delivered because the recipient is out of the service area, etc.

 If "For 0 day" is selected, delivery of the SMS is retried after a while and then the SMS is deleted from the SMS center.

Mail setting screen (P201) ♦ "SMS message validity" ♦ Select a validity ♦ dr [Select]

SMS Center

Default DoCoMo

Set the SMS center address.

You usually do not need to change this setting.

Mail setting screen (P201) • "SMS Center"

DoCoMo : Set DoCoMo as SMS Center address. **Others** : Enter the address.

Note

 To set "Type of Number" to "International", enter "+" at the beginning of the address. If the address contains "★" or "#", "International" cannot be set.


Mai

i-appli

What is i-appli?	210
Downloading i-appli from Site	211
Activating i-appli	212
Automatically Starting i-appli	216
Setting the i-appli Stand-by Screen	217
Managing i-appli <i-appli settings=""></i-appli>	218
Displaying i-appli Site from i-appli	219

What is i-appli?

By downloading i-appli from site, i-mode compatible FOMA handset (hereinafter, referred to as i-mode handset) can be made more convenient. For example, you can enjoy various games downloaded to i-mode handset and automatically check price by downloading i-appli for stock price information. In addition, map i-appli downloads only necessary data, allowing smooth scrolling. Some i-appli allows to directly register data to phonebook or schedule or link with Databox for saving and acquiring images.



- Downloading i-appli →P211
- Activating i-appli →P212
- Automatically activating i-appli →P216

Note

- Some i-appli may use a serial No. of i-mode handset phone/UIM.
- Some i-appli may perform communications at starting. You can set to disable the communications. →P215

Using registered data

Some i-appli software may be able to refer to, register or operate your i-mode handset registration data (phonebook, bookmark, schedule, images). Following operations are enabled using registration data:

- · Phonebook registration
- · Bookmark registration
- Schedule registration
- Image acquisition from Databox
- Image saving to Databox

What is i-appliDX?

With i-appliDX, you can use i-appli more conveniently in such manners as to create mail with your favorite character screen or let you notified of the sender of received mail with a character's comment by linking with i-mode handset information (such as mail text, sent/ received mail history, phonebook data) or to update necessary information such as stock price or promote real-time progression of games by linking with mail.

Using registered data

Some i-appliDX software may be able to refer to, register or operate registration data such as mails, sent mail history, received mail history, ring alert, in addition to registration data available to ordinary i-appli (phonebook, bookmark, schedule and images).

Following operations are enabled using registration data:

- Phonebook registration
- Phonebook referencing
- Using Icon information
- Bookmark registration
- Schedule registration
- · Using mail menu
- · Using Compose message screen
- · Referencing latest sent mail history
- · Referencing latest received mail history
- · Referencing latest unread mail
- · Saving melody
- · Changing ring alert (phone, mail, message)
- Image acquisition from Databox
- Image saving to Databox
- · Changing screen settings (the Wallpaper screen)

Note

- i-appliDX may perform communications regardless of software communication settings to confirm software validity. The communications count and timings differ from software.
- You need to set the Time and Date in order to start an i-appli DX. →P48

What is Mail-linked i-appli?

Mail-linked i-appli, a kind of i-appliDX, allows you to use i-appli more conveniently in such manners to update in real-time the information such as stock price and progression of games by exchanging information with i-mode mail.

• i-appli mails used with mail-linked i-appli may not be displayed correctly.

Other Convenient Functions

i-appli stand-by screen

On the i-appli stand-by screen, you can use an i-appli as the Wallpaper screen, or to receive mail, or make calls. You can make the Wallpaper screen more convenient by setting latest news or whether information on the Wallpaper screen or letting your favorite character inform you of mail reception and alarms. \rightarrow P217

• This function is available with i-appli compatible with the i-appli stand-by screen.

Automatically starting i-appli

You can automatically start software at a specified time, date or day of week. Some software can be automatically started at a time interval predefined in the software. \rightarrow P216

Using camera

You can use i-mode handset Camera from i-appli.

• This function is available with i-appli compatible with Camera function.

Infrared communication

You can communicate with a device installed with Infrared communication function using the i-appli. \rightarrow P252

- This function is available with i-appli compatible with Infrared communication function.
- Depending on the other party's device, communications of some data may be disabled even with Infrared communication function installed.

Infrared remote control

You can operate various device from i-appli such as household electrical appliances compatible with infrared remote control. →P256 For example, "Gガイド番組表リモコン (G-GUIDE Program List Remote Controller)" registered by default can be used as a remote TV controller linked with TV program. →P215

 This function is available with i-appli compatible with infrared remote control function. The other party's device must have related i-appli.

Downloading i-appli from Site

You can download software from a site and save it to FOMA handset.

 You can register up to 60 software items downloaded (the number of items that can be saved may be reduced depending on the software date size).

While a site is displayed \blacktriangleright Select software $\blacktriangleright(\bullet)$

• [Cancel]: Cancel downloading.

After downloading has completed [OK]

When software setup screen opens Initialize the software.

Select an option item

[Change] Select a setting option .

[Select] ♦ 📕 [Return].

- Each setting can also be performed from "Permissions". →P215
- Some items may not be changed depending on the software.

] 🖅 [Yes]

The downloaded software starts.

Downloading mail-linked i-appli

The folder for i-appli mail is automatically created in the Inbox/Unsentbox/Outbox list if you download mail-linked i-appli. The folder name will be the title for the downloaded mail-linked i-appli, which cannot be changed.

 Up to 24 folders, together with folders created using "Create Folder", can be created respectively in Inbox or Outbox. If there are already 24 folders, a mail-link i-appli cannot be downloaded.

Re-downloading mail-linked i-appli

- When downloading a mail-linked i-appli, if only a folder remains, you can use the folder. If the folder name is different from the name of the downloaded i-appli, the folder will be renamed to the name of the downloaded i-appli. If you are not using the folder, you can delete the folder and create a new folder. However, if you do not create a new folder, the mail-linked i-appli cannot be downloaded.
- If security is set to the folder, you need to enter the Security Code for download.

Note

- At downloading, the conformation screen may appear asking whether to send the "serial number of your mobile phone/UIM". Press _____ [Yes] to start downloading. In this case, the "serial number of your mobile phone/UIM" is sent to the ISP (Internet Service Provider) over the Internet, so could be deciphered by third parties. However, your phone number, address, age, and gender are not notified to the ISP (Internet Service Provider) or others by this operation.
- At downloading, the confirmation screen may appear notifying of using "the phone-information data (stored data and serial number of your mobile phone/UIM)". Press A. [Download] to start downloading. Select is [Details] to check the details of the phone-information data you want to use.

- You cannot download if the maximum savable number of software is exceeded or there is not enough memory space available. Download after deleting the saved software.
- If the download of software fails due to weak signal reception, the software cannot be saved.
- Even if the download of software fails due to weak signal reception after old software was deleted to make memory space on the FOMA handset, the old software cannot be restored.

Activating i-appli

i∝ (for 1+ seconds)

	i-appli
Me	emory Used:223/27923
4	6ガイド番組表リモコン薄
R	Hungry Fish
R.	OpeltOut

list screen

Icons on software list screen

lcon	Description
R	Standard i-appli
灾	i-appli DX
P&	Mail-linked i-appli
R" d" E	Auto-start set i-appli
Plass desse desse	i-appli downloaded from an SSL site
R K	i-appli that can be set as the Wallpaper screen
成	i-appli that is set as the Wallpaper screen

Select software 🕨 🖲

- If "Network Access" of "Permissions" is set to "Confirm every session", a confirmation screen whether to allow the communication appears. Select <u>h</u> [Yes]/<u>ie</u> [No].
- Exiting i-appli
 - Press (■ "End".

To start software from other software

Some software can start a specified i-appli without returning to the Software list screen. Some software already has software to be started specified, and others do not.

If the software to be started is already specified

While performing an i-appli, a confirmation screen whether to start the specified software opens. Select the software while the i-appli is running Press ● ▲ [Yes].

If the software to be started not specified

While an i-appli is running, a confirmation whether to list the software appears. ▲ [Yes] ♦ Select software ♦ ▲ [Select].

If a security error occurs

If you attempt to perform operations that are not permitted for the software, a security error is indicated and the error is recorded in "Security error history".

Checking the nature of the security error, or deleting entries from the Security error history →P218

If an abnormality occurs with the software

If an abnormality occurs with the software, you can check the contents using the Trace output. \rightarrow P218

To i-appli creators

If software does not behave as expected while being created, you may want to refer to the Trace output.

Note

- The used memory space shown on the Software list screen indicates the total shared memory space on the FOMA handset as the denominator. As more memory space is used on the handset, this denominator decreases. The numerator indicates the total memory space used by i-appli. When an i-appli is downloaded, this numerator increases.
- Some software performs transmission while activated. You can change the settings in "Network Access" of "Permissions" not to automatically carry out transmission. →P216
- If there is an incoming voice call or video call when the software is running, you can answer the call pausing the software. After the call is terminated, the previous screen returns.
- Even when the software is running, you can receive mail or Message R/F. The software keeps running, and at the top of the screen in the software.
- Images used by an i-appli* or data you entered may be automatically sent to a server via the Internet.
- *: Images used by the i-appli include: images captured with Camera that is started from a Camera-linked (video) application, images obtained using infrared communication function of the i-appli, images downloaded from a site or web site, and images obtained from the Databox by the i-appli.
- You cannot start software downloaded using a different UIM.

- Some i-appli DX software automatically does communication to confirm the validity even if "Network Access" is set to "No". Communication frequencies and timing vary depending on the software.
- If communication frequencies are extremely many within a certain period of time while i-appli is running, the confirmation screen opens asking whether to continue communication. Press .
 [Continue] to continue communication. Press .
 [End] to end the i-appli.
- · Some i-appli do not have sounds.
- Even when "Auto Update" is set to "On", when an i-appli is running, Auto Update is not performed.

Function Menu on Software List Screen

Software list screen (P212) ♦ Select software ♦ → [Function] ♦ Perform the following operations

Upgrade

Upgrade the selected software.

Delete

Delete software. →P218

Auto-start

Set the date and time to start the selected software automatically. \rightarrow P216

i-appli Stand-by screen

Set the selected software on the i-appli stand-by screen. \rightarrow P217

Software Info

Display the information of the selected software such as name, version and size.

Permissions

Set the operating conditions of the selected software. \rightarrow P215

Note

Upgrade

- If the mail folder has security set, the Security Code is required.

Software Pre-installed

The following table shows pre-installed i-appli.

Game	Hungry Fish
	OpeltOut
Other software	G-GUIDE Program List Remote Controller

- The i-appli title may differ from the name displayed on the screen.
- Deleted pre-installed i-appli can be downloaded from the following Motorola's URL http://motomobile.jp/

Hungry Fish

This is a food chain game that you try to eat fish smaller than you to grow larger, while not being eaten by fish larger than you. Grow larger by eating as many fish as you can.

Software list screen (P212) ♦ "Hungry Fish" ♦ (●)

The menu screen opens.

Perform the following operations

ゲーム (Game)

Start the game.

はじめから (From the beginning)

- : Start the game from.
 - ◆ Use ① to select a background ◆ ▲ [開 始 (Start)]

つづきから (Continue)

: Resume the game from where it was saved. ◆ Use ⑦ to select a record ◆ ▲ [選択 (Select)] 证 [開始 (Start)]

オプション (Options)

Set the actions for the game.

♦ Set the following item ▶ Ⅰ [保存(Save)]

- バイブレータ (Vibration)
 - : Set the handset to vibrate when you are eaten by a fish larger than you.
 - Use or to select "ON"/"OFF"
- BGM : Set whether to play background music during a game.
 - Use or to select "ON"/"OFF"

サウンド (Sound)

- : Set whether to play using sound effects during a game.
 - ◆ Use () to select "ON"/"OFF"
- バージョン情報 (Version information)

Display the version information of the software.


ルール説明 (Rules)

Display the description and operations of the game.

終了 (Exit)

The software list screen returns.

Operations during the game



Life time

This indicates your fish's remaining life time. As the life time becomes shorter, more bones are exposed. If you become a skeleton, your body becomes 1 size smaller. When you become the smallest size, the game is over.

Also, when you eat fish smaller than you, your remaining life time becomes longer.

 You are the smallest right after your start the game by selecting "はじめから (From the beginning)".

2 The largest fish

This is the largest fish. You can grow your fish up to the same size as this fish.

3 As a fish:

Avoiding touching fish larger than you, but chase and eat fish smaller than you. When you eat fish with the life time **X**, you grow 1 size larger, however, as you grow, you move slower.

- If you touch fish larger than you, you are eaten away to become a skeleton and sink to the sea bed. Within a lifetime, you are repeatedly reborn regardless how many times you are eaten.
- Fish the same size as you do not eat you even if you touch them.

4 Score

This indicates the number of fish you have eaten.

6 Eaten fish

How to move yourself

Key	Description
	Move to left/Move to right
([AKC 2 th / ^{TUV} 8 ⁺)	Move to up/Move down
1	Move to upper left
Eta Sta	Move to upper right
7 ^B ross	Move to lower left
100 March 100 Ma	Move to lower right

To pause/resume the game

Press (in) [ポーズ (Pause)]/[再開 (Resume)] on the Game screen.

Saving the Status of the Current Game

The game being played can be saved.

- ② "新規作成 (Create new)" ▶ ▲ [選択 (Select)]
 - If you have already saved 3 games, select a game record and overwrite it. The record is displayed with the saved date and time. Resume the game from where it was saved.
- Resuming the game from where it was saved

Menu screen (P213) ♥ "ゲーム (Game)" ♥ "つづき から (Continue)" ♦ Select a record ♦ Press (▲) [Select].

To resume the game while playing the game

▲ [メニュー (Menu)] ◆ "つづきから (Continue)"

Select a record Press [] [Select].

OpeltOut

The purpose of this game is to reveal a hidden picture by moving the cursor while avoiding a collision with the moving ball.

Software list screen (P212) ▶ "OpeltOut" ▶(●)

The menu screen opens.

Perform the following operations

ゲーム (Game)

Start the game.

はじめから (From the beginning)

- : Start the game.
 - ◆ Use () to select a level ◆ ▲ [開始 (Start)]

つづきから (Continue)

: Resume the game from where it was saved. ◆ Use ① to select a record ◆ ▲ [選択 (Select)]

オプション (Options)

Set the actions for the game.

♦ Set the following item ♦ Ⅰ [保存(Save)]

スピード (Speed)

- : Set the speed of the cursor and the ball.
 - ◆ Use 🕞 to select "低 (slow)"/"中 (medium)"/
- "高 (fast)"

サイズ (Size)

- : Set the size of the cursor and the ball.
 - ◆ Use 😔 to select "小 (Small)"/"大 (Large)"

サウンド (Sound)

- : Set whether to play a sound during a game.
 - ♦ Use to select "OFF"/"ON"

バイブレータ (Vibration)

- : Set to vibrate the handset when the ball touches the line.
 - ♦ Use → to select "OFF"/"ON"

バージョン情報 (Version information)

Display the version information of the software.

ルール説明 (Rules)

Display the description and operations of the game.

終了 (Exit)

The software list screen returns.

Operations during the game



Indicator

Indicate how much area of the hidden picture has been uncovered in a bar and percent.

2 Cursor

Move the cursor to see the hidden part of the picture.

3 Number of lives

When all \P disappear, the game is over. In any of the following conditions, 1 \P disappears.

- When the moving ball hits the cursor or the line drawn with the cursor
- When you move back the cursor while it is moving
- When the cursor touches the line drawn with the cursor

4 Moving ball

The higher the level, the more balls appear.

Moving the Cursor

Кеу	Description
	Move to left/Move to right
(<u>sec2</u> [*] / ^{tev} 8 [*])	Move up/Move down

To clear a stage

You can advance to the next stage clearing the current stage after you expose the hidden picture for the stage. The table below shows how much of the picture you must expose in order to clear the stage.

Stage	Number of Balls	Exposure Ratio
Level 1	1	86% or more
Level 2	2	81% or more
Level 3	3	76% or more
Level 4	5	66% or more
Level 5	7	61% or more

 When you finish drawing a line, hidden areas (areas without moving balls) disappear and a picture appears. However, when there are moving balls on both sides of the line, no picture appears in either area.

Saving the Status of the Current Game

The game being played can be saved.

- ① The Game screen (P215) (i∈) [メニュー (Menu)] ▶ "セーブ (Save)"
- ② "追加 (Add)" ♦ 📕 [Select]
 - If you have already saved 3 games, select a game record and overwrite it. The record is displayed with the saved date and time.

Resuming the game from where it was saved

• See "Resuming the game from where it was saved" (P214) in "Hungry Fish".

Gガイド番組表リモコン (G-GUIDE Program List Remote Controller)

 The screen image only provides an example. It may differ from your actual screen. A program list that is applicable to your location is displayed.



This is a convenient application which combines a

TV program list and a TV remote controller, and is free of monthly usage charges.

You can obtain TV program information for any time slot, from anywhere and at anytime. You can acquire information on a program title, program description, start and end times and the G-code for your local TV station.

When you find a program of interest, you can send mail, using the "Recommendation Mail" function, with the program title and broadcast schedule to your friends. You can also control your TV remotely (some models cannot be controlled).

- When using this application for the first time, you need to configure the settings and agree to the license agreement.
- Separate packet communication charges apply.
- For details, refer to "Mobile Phone User's Guide (i-mode) ".
- For Infrared remote control, see "Using the Infrared Remote Control Function" (P256).

Setting i-appli Operating Conditions

Set operating conditions for each software. You can set to make communications automatically while software is active or whether to start i-appli via infrared communications. • Some items may not be changed depending on the software.

"Permissions" Perform the following operations

Network Access

Set whether to make communications while software is active.

"Yes"/"No"/"Confirm every session"

Stand-by net

Set whether to make communications while the i-appli stand-by screen is active.

"Yes"/"No"

GetSysInfo

Set whether to permit the use of icon information for i-mode mail, Message R/F, in/out of the service area, battery level, or Manner Mode when the software starts.

"Yes"/"No"

Start from browser

Set whether to start software from site.

"Yes"/"No"

Start from mailer

Set whether to start software from a mail.

"Yes"/"No"

Start from IR

Set whether to start software via infrared communications.

"Yes"/"No"

Start from Barcode

Set whether to start software from barcode reader.

"Yes"/"No"

Change ring/image

Set whether to allow, when software is started, to automatically change an image and/or melody set for ring alert or on the Wallpaper screen.

"Yes"/"No"/"Confirm every set-up?"

Phbook/Dials acc.

Set whether to allow to reference the phonebook and reception history when software is started.

"Yes"/"No"

Note

Common

 Depending on the settings in "Permissions", the software may not connect to the network (Unread messages or battery level, etc. may not be available).

Network Access

- When this is set to "No", the software may not start, or real-time information may not be provided.
- When this is set to "Yes", the software automatically connects to the network. While connected, packet communication charges apply.

Stand-by net

 When this is set to "Yes", the software automatically connects to the network. While connected, packet communication charges apply.

GetSysInfo

 When set to "Yes", information about the status of the handset as indicated by the presence of icons for unread mail, messages, battery level, Manner Mode, inside the service area, and outside the service area may be sent to Information Providers (IP) via the Internet in the same manner as "Serial Number of your Mobile Phone/UIM" is sent. The icon information may be intercepted by a third party.

Auto-start

Automatically Starting i-appli

 Date and Time need to be set in advance in order to start an i-appli automatically. →P48

Setting whether to Automatically Start

Default On

You can set whether to start an i-appli automatically.

● ▶ ₩ (Settings) > "i-appli Settings" > "Auto-start"

- On : Permit Auto-start.
- Off : Do not permit Auto-start.

Setting Start Date/Time

Default Off

Set the date and time when the software starts automatically. You can set different dates and times for each piece of software, or you can use the pre-set Auto-start functions of the software.

Software list screen (P212)♦ Select

software ▶ _ [Function] ▶ "Auto-start"

- Perform the following operations
- "Date", "Day", and "Time" are displayed according to the setting in "User".

User

Select a repeating pattern of Auto-start.

Select	a following repeating pattern
Daily	The software starts automatically at the specified time every day.
Weekly	The software starts automatically at the specified time on the specified day of the week every week.
Monthly	 The software starts automatically at the specified time on the specified date every month.
Yearly	The software starts automatically at the specified time on the specified date every year.
Once	The software starts automatically at the specified date and time only once.
Off	The software does not start automatically.

Date

Set the date for auto-start.

Select "Day", "Month", and "Year" field → Use Dial Keys to enter the number → [OK]

Day

Set a day of the week to start automatically.

Select a day of the week https://www.select.com [Select]

Time

Set the time for auto-start.

Select "Hour", "Minute", and "Display format" field
 Use (1/2) / Dial Keys to enter the number/select the format
 (DK)

Software

Set whether to permit Auto-Start set to the software.

♥ "On"/"Off" ♥ ▲ [Select]

7 I [Complete]

Note

- The software will not automatically start when:
 - The FOMA handset power is turned off
 - A call or communication is in progress
 - Another function is running
 - Lock Now is set
- You cannot set a time for Auto-start under 10 minutes before and after the time for Auto-start for other software. A confirmation screen whether to edit the start time opens. Press <u>h</u>[Edit] to edit.
- Software is not started at a automatic start time if other software is active at that time.

Stand-by

Setting the i-appli Stand-by Screen

Only one compatible software program can be set for the i-appli stand-by screen.

On : Set as the i-appli stand-by screen.

Off : Cancel the i-appli stand-by screen.

To operate the software set as the i-appli stand-by screen

Press when the i-appli stand-by screen is open.

Note

- When the i-appli stand-by screen is set, a message appears asking whether to start the i-appli stand-by screen when the handset is turned on. Select
 [Yes] to start and
- When the i-appli stand-by screen is open, activating "Lock Now" in "Phone Lock" closes the i-appli stand-by screen. Deactivating "Lock Now" opens the i-appli stand-by screen.
- Setting "Telop display" of i-Channel to "ON" on the i-appli stand-by screen closes the i-appli stand-by screen, and displays the Telop on the Standby screen. To open the i-appli stand-by screen, set "Stand-by " to "On" again.
- Some software may not be set on the i-appli standby screen.
- Web To function from the i-appli stand-by screen is not available.
- When software for communication is set on the i-appli stand-by screen, it may not function correctly for some signal conditions.
- When "Stand-by net" is set to "No", timely information may not be provided.

Canceling the i-appli Stand-by Screen

You can release the i-appli stand-by screen and restore the normal wallpaper screen.

The activated i-appli stand-by screen

€

Resume : The software running screen returns.

End : Close the i-appli stand-by screen and reopen it without canceling the i-appli standby screen settings.

Remove from standby

: Cancel the i-appli stand-by screen.

Note

 If the i-appli stand-by screen is terminated due to an error, the time and date when the error occurred are recorded in the "Abnormal exit history". →P218

i-appli Settings

Managing i-appli

Sort by: Name Softw. info display: Off **Light: Phone Settings** Vibrate: Software Settings

You can set up/manage the software saved in the FOMA handset.

(●) ♣ ¼ (Settings) ♥ "i-appli Settings" ♥ Perform the following operations

Sort by

Rearrange software by setting conditions such as name or size.

Name	Sort software in ascending order of name.
Size	Sort software items in an descending order of size.
Downloaded Time :	Rearrange software in chronological order by saved date and time.
Access Time :	Rearrange software in chronological order by date and time when the software was last used.

Auto-start

Set whether to automatically start software. →P216

Softw, info display

Set whether to display software information when downloading the software.

"On"/"Off"

Light

Set lighting used while software is active.

Phone Settings	: In accord with the settings in
	"Backlight".

Software Settings : In accord with the software settings.

Vibrate

Set vibrate operation type used while software is active.

Phone Settings : In accord with the settings in "Sound Profiles".

Software Settings : In accord with the software settings.

Start failure history

- Display a log of software failures to Auto-start.
- · To delete entries from Start failure history, press □ [Function] ► Select "Clear All".

Abnormal exit history

Display a log of abnormal termination of the i-appli standby screen.

 To delete entries from Abnormal exit history, press [Function] ♦ Select "Clear All".

Security error history

Display a log of errors of software terminated due to a security error.

 To delete entries from Security error history, press [Function] ♦ Select "Clear All".

Trace Output

Display the trace information of the software.

- To delete entries from Trace Output, press
- [Function] ♦ Select "Clear All".

Note

Sort by

- · If you sort by name, the names will be reordered in the order of symbols \rightarrow numeric (0 \rightarrow 9) \rightarrow alphabetic (A \rightarrow Z \rightarrow a \rightarrow z) \rightarrow hiragana \rightarrow katakana (full-pitch → half-pitch) → kanji (the order of Shift-JIS) → katakana (half-pitch).
 - When full-pitch and half-pitch characters are mixed up, half-pitch characters take precedence excluding katakana.
 - Symbols are sorted in the order of ASCII → Shift-JIS character codes.

Abnormal exit history

When an i-appli stand-by screen ends normally, it is not recorded in the Abnormal exit history.

Trace Output

Trace information does not appear if it does not exist.

Deleting i-appli

- Software list screen (P212) Select software <a>[Function] "Delete"
 - Perform the following operations

Delete One

You can delete the selected software.

▶ ▲ [Yes]

Default

Delete Several

You can select and delete multiple software programs.

♦ Checkmark to software to delete ♦ A [OK] ♦ A
[Yes]

Delete All

You can delete all the software saved.

Enter the Security Code F 上 [Yes]

Note

- If the folder for a mail-linked i-appli contains protected messages, only the software will be deleted.

Displaying i-appli Site from i-appli

You can connect to a site and use FOMA function while i-appli is active.

- You have to download related i-appli in advance.
- For some i-appli, operations may be different or disabled.

Displaying Site i-appli from Site

Select URL during i-appli start

Software exits and site appears.

Using the Camera from an i-appli


You can use the Camera from a running i-appli.

- Captured images will be saved in the "i-mode/Other" folder in "My Pictures" of the "Databox".
- · Captured images can be used by the i-appli software.

Start the camera when the i-appli is running

The still image capture screen opens.

Using the Camera →P145



A still image is captured.

Using Barcode Reader from i-appli

You can use the Barcode reader from a running i-appli.

- The scanned results can be used or saved by the software.
- When scanning JAN codes or QR codes, align the Macro Mode Switch to ♥ and keep the Camera approximately 10 cm away from the target code.
 →P149

Start the barcode reader when the i-appli is running

The Start Scan screen opens.

- Using the Barcode Reader →P151
- 🕨 Check JAN code/QR code 🕨 💿

Scan the code.

i-Channel

What is i-Channel?	222
Using i-Channel	223
Setting i-Channel <i-channel setting=""></i-channel>	223

What is i-Channel?

This is a service provided by DoCoMo or IP (Information Service Provider) to deliver news and/or weather information as graphical information to handsets compatible with i-Channel. Note that i-Channel information is displayed in Japanese only. Information is periodically received and latest information is displayed as Telop on the Wallpaper screen; in addition, it can also be displayed in a channel list by pressing .

Moreover, rich detail information can be acquired by selecting favorite channels from a channel list.

- Display method of Channel list →P223
- For precautions and details of using i-Channel, refer to "Mobile Phone User's Guide [i-mode] ".

Before subscribing to the service



After the service subscription procedures have been completed



1 When you have not subscribed to i-Channel

- 2 After you have subscribed to i-Channel, Telop appears on the Wallpaper screen at a timing information is received or channel list is displayed.
- 3 A channel list is displayed by pressing <u>L</u>. You can view in list format information, etc. given in telop of each channel.
- 4 You can view detail information screen of each channel by selecting it.
- * Screens shown are images. They differ from actual ones.


There are 2 types of channels: "Basic Channel" and "Favorite Channel".

"Basic Channel" is channel provided by DoCoMo. Because it is registered by default, it is immediately available upon subscription to i-Channel. Packet communication charges applying to automatic update of information delivered for "Basic Channel" is included in i-Channel service fee.

"Favorite Channel" is provided by IP (Information Service Provider) other than DoCoMo and available when you register a favorite one. Packet communication charges applying to automatic update of information delivered for "Favorite Channel" is not included in i-Channel service fee.

Information that can be displayed as telop on the Wallpaper screen is only that of "Basic Channel".

IP (Information Provider)



- i-Channel is a fee-based service requiring a separate subscription (i-mode contract is necessary for subscription).
- Operations →P223
- Applicable models: Available on the i-Channel compatible handset. For details, refer to "Mobile Phone User's Guide [i-mode] ".

Note

- Some "おこのみチャネル (Favorite Channel)" may require information fee for using.
- Some "おこのみチャネル (Favorite Channel)" may require separate subscription to IP (Information Service Provider) that provides information for use.
- Both "ベーシックチャネル (Basic Channel)" and "お このみチャネル (Favorite Channel)" require packet communication charges for viewing detail information from a channel list besides i-Channel service fee.

Trial Service


When you use an i-Channel compatible handset and have subscribed to i-mode, but not to i-Channel for the subscriber line using the i-Channel compatible handset, you can use "Basic Channel" for a predetermined period of time without service charges. Note that you will be charged packet communication charges apply for viewing detail information from a channel list. Trial service will be started automatically in principle when a predetermined period of time has elapsed after inserting UIM and starting to use i-Channel compatible handset. When it is not started automatically, press 4 to start it. Trial service can be used only once for 1 subscriber line. Trial service will be terminated automatically when a predetermined period of time has elapsed after the start. For the procedure to terminate it halfway, refer to "Mobile Phone User's Guide [i-mode] ".

· For precautions and details of using the trial service, refer to "Mobile Phone User's Guide [i-mode] ".

Using i-Channel

When you have subscribed to i-Channel, information automatically appears as telop on the Wallpaper screen upon reception of information.

- · To automatically display telop, see "Telop display" to "ON". →P223
- · When Public Mode (Drive Mode) is set, the telop will not be displayed.



Select a channel item **b** (•)

The site is connected and detail information appears.

• (•): The channel list screen reappears.

Note

- · Even when information is received, no ring alert or vibrator operates. Also, the Call Indicator does not light/blink.
- · Information may not be received when the handset power is turned off, while out of the service area, or when the signal reception is weak. Press 4 to receive information. The telop on the Wallpaper screen will show the information automatically. Also, information may not be received using the default settings. In this case, press [-+] to receive information. The telop on the Wallpaper screen will show the information automatically.
- Depending on the operating conditions, information may be received at the timing a channel list is displayed.

- If you change the connection destination in "Host setting" of "i-mode setting", the connection destination of i-Channel is also changed. (Normally, you do not need to change the settings).
- · The telop will not appear after i-Channel is cancelled.
- Setting "Stand-by" to "On" when the Telop is being displayed hides the Telop. To display the Telop, set "Telop display" to "ON" again.
- A message to the effect of failure of channel information acquisition may appear in the following cases:
 - When i-Channel connection destination has been changed
 - When the "Master Clear" has been performed
 - When UIM has been replaced

i-Channel Setting

Setting i-Channel

Default	Telop display: ON Telop speed: Usually Telop setting: Font color (Green)/ Background color (Black)
---------	---

You can set whether to display telop on the Wallpaper screen or set the telop display style.

Channel list screen (P223) 🕨 🖅 [Function] Perform the following operations

Telop display

Set whether to display channel information in the telop style on the Wallpaper screen.

"ON"/"OFF"

Telop speed

Set the telop moving rate.

"Low speed"/"Usually"/"High speed"

Telop setting

Font color :	Set the font color of the telop. ♦ Select a font color ♦
Background color :	Set the background color of the telop. Select a background color Select]

SWAP

Call up another function such as phonebook, datebook. →P258

Note

Telop display

 If you cancel the i-mode service before canceling i-Channel, the "Telop display" setting remains, however, the telop eventually will not be displayed automatically.

Telop setting

• When the Font color or Background color is set to "default", they are displayed in the default color.

Data Display, Edit, Management/Music Playback

Databox	226
Editing Still Images <edit images="" still=""></edit>	227 230 232
· ····································	233 236
Managing Still Images and Video Clips/i-motion Using Albun Using Albums <picture albums="" i-motion=""></picture>	ns 237
	239 239
······································	240 244
	245 248
Inserting/Removing a microSD Memory Card Using a microSD Memory Card Folder Structure on the microSD Memory Card Reading from and Writing to a micro SD Memory Card with the FOMA Handset Playing Music Data Created with an External Device on the FOMA Handse	249 249 250 251 251 251 t 252
Exchanging Data One Piece at a Time <ir data="" irda="" link=""> Exchanging All Data <send all="" receive=""></send></ir>	ON 252 254 255 256

Databox

The Databox contains the items and folders shown in the following table. Data obtained from sites or i-mode mail are saved in folders according to their respective types.

My Pictures	
540	A.U
Pictures (All)	All still images saved in My Pictures
Camera	Still images captured by the Camera
i-mode/Other	Still images obtained from sites, via mail or data communications
Pre-installed	Still images provided by default
Picture Albums	Most Viewed
	User-created picture albums
i-motion	
i-motion (All)	All videos/i-motion movies saved in the i-motion folder
Camera	Videos captured by the Video Camera
i-mode/Other	Videos/i-motion movies obtained from sites, via mail or data communications
Pre-installed	Videos provided by default
i-motion Albums	Most Viewed
	User-created i-motion albums
🞝 Melody	
Melody (All)	All melodies saved in Melody
i-mode/Other	Melodies obtained from sites, via mail or data communications
Pre-installed	Melodies provided by default
Playlists	Most Played
	User-created playlists
5 Chara-den	•
Chara-den (All)	All Chara-den saved in Chara-den
i-mode/Other	Chara-den obtained from sites
Pre-installed	Pre-installed Chara-den
Animations	•
Animations (All)	All Flash images saved in Animation
i-mode/Other	Flash movies, etc. obtained from sites

Pre-installed	There are no pre-installed Flash movies	
Voice Notes		
Voice Notes (All)	All Voice Notes saved in Voice Notes	
My Notes	User-created categories	

Note

- To manage files by title or category, use Picture Albums, i-motion Albums, Playlists or My Notes. In other pre-installed folders, folders cannot be created, or files cannot be moved to another folder.
- Chaku-Uta songs downloaded from a site, or via mail or data communication, as well as i-motion movies with sound only, are saved in "i-mode/Other" in the "Melody" folder.
- The pre-installed files cannot be deleted.
- Up to 1000 files excluding the pre-registered files can be displayed on the Databox.
- Up to 1000 files downloaded from web sites can be saved. If 1000 downloaded files have already been saved, delete some downloaded files before downloading.
- When you move/copy a file in "My pictures"/ "i-motion" to the handset or microSD memory card, it will be saved in "i-mode"/"i-motion" folder.
- Files saved in the Databox are labeled with saved year, month, day and time automatically. Also, up to 29 characters can be registered in the file name. Example: Saved at 10:10 on November 1, 2006 "01-11-06_1010"*
 - *: File naming convention varies depending on the date format set by "Date Format" of "Time and Date".

Notice

The stored content may be lost due to the handset failure or repair. DoCoMo is not responsible for lost data. It is recommended that you keep saved content from the handset on a microSD memory card. You can connect the handset to a PC using Data Link Software and a FOMA USB Cable (optional) and save data to the PC.

Function Menu on the Databox

● ♦ ∰ (Databox) ♦ [Function] ♦ Perform the following operations

Now Playing

Show the Playback screen for the melody played in background. \rightarrow P243

Rename microSD

Specify a name to the microSD memory card.

Enter a file name

Format microSD Format the microSD memory card.

```
♦ ि [Yes]
```

Free Space

Display the free space on the handset or the microSD memory card.

Hide

Display the main menu while a melody is being played in background. →P243

Picture Viewer


Displaying Images

You can display still images you have captured. or obtained from sites or i-mode mail.

Available file formats

File Format*	JPEG, GIF		
Pixels	JPEG : Up to 1200 x 1600 dot GIF : Up to 640 x 480 dot		
File Extension	jpg, gif		


*: Even if a file is in a compatible file format, it may not display, depending on the file.

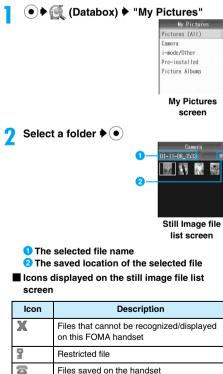

Files saved on the microSD memory card

No saved files

Select a file ()



File name

2 Sequence number/number of saved files Show the serial number of the current file and the total number of saved files in the folder.

Control Kev

Show available Multi-function keys.

4 Bar

Show the serial number on a bar.

Key operations on the still image display screen

Key	Description	
\odot	Display the previous/next file	
**************************************	Displaying a full image, hiding the Soft keys*/returning to the original display size	
\odot	Display a slide show of files in the folder	
٥	Send the displayed image via Infrared or Bluetooth. →P184, P254, P273	

*: The image is displayed in the direction set in "Full Screen" of "Pictures Setup".

Note

- · When this icon is not displayed on the screen, you can display it by pressing \bigotimes .
- · The file name or Control key displayed on the Still image display screen may not be viewed clearly in places such as outdoors where the lights are strong.

Function Menu on the My Pictures Screen

My Pictures screen (P227) [Function] Perform the following operations

Now Playing

Show the Playback screen for the melody played in background. →P243

Create New

Start the Camera.

- Using the Camera →P145
- "Picture"

Pictures Setup

Set the playing method of a slide show and the orientation to display a full image. →P229

Hide

Display the main menu while a melody is being played in background. ${\rightarrow}\mathsf{P243}$

Function Menu on the Still Image File List Screen

Now Playing

Show the Playback screen for the melody played in background. \rightarrow P243

View

Display the selected file.

Add To Album

Save the selected file to an Album.

Select an album

• Enter an album name if you select "[Create New Album]".

Edit

Edit the selected file. →P230

Create New

Start the Camera.

- Using the Camera →P145
- "Pictures"

Filter by

List files specifying a storage location

"Storage location"

All	: Display all files saved on the FOMA handset/microSD memory card.
Phone Memory	: Display only files saved on the FOMA handset.
microSD	: Display only files saved on the microSD memory card.
Send	
(Create an i-mode mail with a file attached. Go to Step 2 in "Creating and Sending -mode Mail" (P184).
to IrDA : S	Send 1 file using Infrared communication.
	Send via Bluetooth. Go to Step 2 in Registering and Connecting a Bluetooth Device" (P273).

Apply As

 Set the selected file as Wallpaper screen or Screen Saver.

 Wallpaper
 : Set as Wallpaper screen.

 Phonebook Entry:
 : Set to a Contact. Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97).

 Screen Saver
 : Set as Screen Saver. Only JPEG format files can be set.

 Camera Off Image:
 Set the file as the alternate image for

video calls.

Manage

Manage				
Rename : Change the name of the selected file.				
Delete	Delete : Delete the selected file.			
Move	Move the selected file to the FOMA handset or the microSD memory card.			
Сору	: Copy the selected file to the FOMA handset or the microSD memory card.			
Select I	Multiple to			
	 Album : Select multiple files and save to an Album. ♦ Checkmark to files to be saved in the album ♦ (is) [Complete] ♦ Select an album ♦ (is) • Enter an album name if you select "[Create New Album]". 			
Delete	 Select multiple files and delete them. Checkmark to files to delete Image: Image: Im			
Move	 Select multiple files and move to the FOMA handset/microSD memory card. Checkmark to files to move [im] [Complete] "microSD"/"Phone" 			
Сору	: Select multiple files and copy to the			

FOMA handset/microSD memory card. Checkmark to files to copy (inc [Complete] "microSD"/"Phone"

Details

Display the file name, size and type, etc. of the selected file. \rightarrow P229

Pictures Setup

Set the playing method of a slide show and the orientation to display a full image. \rightarrow P229

Hide

Display the main menu while a melody is being played in background. ${\rightarrow}\mathsf{P243}$

Function Menu on the Still Image Display Screen

Still image display screen (P227) ♦ [Function] ♦ Perform the following operations

Now Playing

Show the Playback screen for a melody played in background. \rightarrow P243

View Full Screen

Display the entire image, hiding Soft keys, etc. The image is displayed in the direction set in "Full Screen" of "Pictures Setup".

- Core : Restore the full image to the previous display.
- Display the next/previous image.

Edit

Edit the displayed file. →P230

Create New

Start the Camera.

٠	Using	the	Camera	→P145
---	-------	-----	--------	-------

"Picture"

Send

in Email	:	Create i-mode mail with the file attached. Go to Step 2 in "Creating and Sending i-mode Mail" (P184).
to IrDA	:	Send 1 file using Infrared communication.
to Bluetooth	:	Send via Bluetooth. Go to Step 2 in "Registering and Connecting a Bluetooth Device" (P273).

Apply As

Set the displayed file as Wallpaper s	screen or Screen Saver.
---------------------------------------	-------------------------

- Wallpaper : Set as Wallpaper screen. Phonebook Entry : Set to a Contact. Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97) Screen Saver : Set as Screen Saver. Only JPEG format files can be set.
- Camera Off Image: Set the file as the alternate image for video calls

Manage

- Delete : Delete the displayed file.
- Move : Move the displayed file to the FOMA handset or the

microSD memory card.

Copy : Copy the displayed file to the FOMA handset or the microSD memory card.

Zoom

Fit to Screen : Display a full image.

Original Size : The saved file is displayed in the saved actual size. Use 🚯 to move up, down, left and right.

Details

Display the file name, size and type, etc. of the displayed file. →P229

Pictures Setup

Set the playing method of a slide show and the orientation to display a full image. →P229

Hide

Display the main menu while a melody is being played in background. →P243

Note

Manage

If you move/copy a file to Phone or microSD memory card, the file will be saved in "i-mode/Other" folder.

Viewing Image Information

Still image file list screen (P227)/Still image display screen (P227)/Flash movie file list screen (P232)/Flash movie playback screen (P232) 🕨 📥 [Function] "Details"
"File Details"

Information displayed on the File detail screen

If there is no information, "Unknown" is displayed.

Item	Description
File name	Display the file name
Size	Display the file size
Type*	Display the file format
Resolution*	Display the file resolution
Date Stored	Display the saved date and time
Forwarding Possible*	Display whether the image can be sent to another device
Apply Possible	Display whether the image can be set as Wallpaper screen or Screen Saver
File Restriction	Display whether the file is restricted

*: Not displayed for a Flash file.

Setting the Play Back Method of a Still Image

Auto Repeat: Off Default Slide Interval: 4 Full-Screen: Left (90 CCW)

Set the playing method of a slide show and the orientation to a full image.

Still image file list screen (P227) Select a file/Still image display screen (P227)

[Function] "Pictures Setup"



Perform the following operations

Auto Repeat

Set whether to automatically repeat a slide show.

- Off : Play all files in the folder once as a slide show.
- On : Play all files in the folder once as a slide show repeatedly.

Slide Interval

Set the interval for a slide show from 1 to 999 seconds.

Enter the number of seconds

Full Screen

Set the angle of the image to be displayed when displaying a full image.

"Left (90 CCW)"/"Right (90 CW)"

Restricting Files

You can restrict files. A restricted file attached to mail cannot be sent or forwarded from the recipient FOMA handset.

- Select a file to restrict IFunction
- "Details"/"File Details"

The File detail screen opens.

[Function] ▶ "Restrict File"/ "Remove Restriction"

Edit Still Images

Editing Still Images

You can edit still images. The edited still image is saved in the same folder as the source file.

- · The pre-installed files cannot be edited.
- Only JPEG files can be edited. However, some files may not be edited.
- Editing a still image repeatedly may reduce the image quality or increase the file size.

Still image file list screen (P227)/Still image display screen (P227) Select a file - [Function] - "Edit"



Still image edit screen (Example: Edit brightness)

Use () to select from the following editing items:

Brightness

Set the brightness of an image.

♦Use ↔ to select the Brightness

Contrast

Set contrast of the image.

Use 😔 to adjust the contrast

Blur/Sharpen

Set the sharpness of the image.

♦Use → to adjust the sharpness

Rotation

Set an angle to rotate an image.

▶ Use ↔ to select an orientation

Mirror

Set the direction for mirroring the image.

Use () to select "None Selected"/"Horizontal"/ "Vertical"

Borders

Add a frame to an image.

♦ Use ↔ to select a frame

Image Style

Set special effects for an image.

- ♦ Use ↔ to select the following items
- None Selected : No image effect is set.

Black&White	:	Change the image into black and white.
Negative	:	Change the image into negative.
Sepia	:	Change the image into sepia tone.
Solarize	:	Change the image into solarization tone.
Reddish	:	Emphasize red.
Greenish	:	Emphasize green.
Bluish	:	Emphasize blue.

i∝ [Apply] 7

- To restore the file before editing IFunction] ▶ Select "Undo".
- To end editing without saving the file IFunction] ▶ Select "Exit".
- To overwrite [Function] ♦ "Save" ♦ Press [♣] [Yes].
- (Isave As]
- "File Name" Enter a file name
- "Storage Location" "Phone"/ ĥ "microSD"
- [Complete]

Note

Boarders

- · Boarders cannot be added to a source image under 60 x 60 dots.
- Boarders downloaded from a web site or obtained via infrared communication or i-mode mail cannot be added.

Cropping an image

Still image edit screen (P230) [Function] "Crop"

2 Use 🕀 to move the black frame to the area to crop

- By pressing ____ [Function] to select the size displayed lower than "Switch Crop Mode", you can change the cropping size.
- ➡ [Function] ♦ Select "Resize" to change the size of the black border using .
- Go to Step 3 in "Editing Still Images" (P230).

Note

 Source images whose size is under 60 x 60 dots cannot be cropped.

Changing the Image Size

Depending on the source image size, the size to be changed to varies. The following table shows available sizes:

Source image file size*	Available image size
Wallpaper (240 x 320)	120 x 160, 60 x 80
VGA (480 x 640)	240 x 320, 120 x 160, 60 x 80
1.3M (1024 x 1280)	512 x 640, 256 x 320, 128 x 160, 64 x 80
2.0M (1200 x 1600)	600 x 800, 300 x 400, 150 x 200, 75 x 100
QCIF (176 x 144)	88 x 72
CIF (352 x 288)	176 x 144, 88 x 72

*: For resolutions of still images captured with this FOMA handset.

Still image edit screen (P230) [Function] "Resize"

🔈 Select a new size 🕨 🖅 [Select]

• Go to Step 3 in "Editing Still Images" (P230).

Note

- You cannot resize an image to a larger size than the original image.
- The ratio of the source image cannot be changed.
- A source image under 120 x 120 dots cannot be resized.

Adding Graphics

Still image edit screen (P230) ♦ ▲ [Function] ♦ "Add Graphic"

2 Use ↔ to select a graphic → Use ↔ to specify the location to add the graphic

■ To change the graphic size ↓ [Function] ◆ "Resize" ◆ Use ↔ to

change the graphic size.

To add another graphic

(Function) \bullet "Add Graphic" \bullet Use O to select a graphic \bullet Use O to select the location to add the graphic.

When there are multiple graphics, press .
 [Function] Select the graphic name to switch focus.

To delete an added graphic

[Function] ► Select "Cancel"/"Remove Graphic".

Save the still image

• Go to Step 3 in "Editing Still Images" (P230).

Note

- Graphics cannot be added to source images whose size is under 60 x 60 dots.
- Pre-installed Graphics →P327

Adding Text

- "Text" + Enter the text to add
- Font Size" 🕨 Select the font size
- "Font Color" Select the font color
- 👍 [Complete]

Use 🕀 to specify a location to add the text

To change the text

[Function] ♦ Select "Edit Text" and perform from Step 2 to 6.

- - When there are multiple text strings,
 [Function] Select the text name to switch focus.

To delete added text

[Function] ♦ Select "Cancel"/"Remove Text".

Save the image

• Go to Step 3 in "Editing Still Images" (P231).

Note

• Text cannot be added to source images whose size is under 60 x 60 dots or over 640 x 480 dots.

Viewing Flash Movies

You can view Flash moves downloaded from a site, etc.

Available File Formats

File Format*	Flash
Pixels	240 x 196 dots or less
File Size	100 Kbytes
File Extension	swf

*: Even if a file is in a compatible file format, it may not play, depending on the file.

● ♦ 🔍 (Databox) ♦ "Animations"

Animations Animations (All) i-mode/Other Pre-installed

Animation screen

Animations (All)

Flash file list screen

-

-

-

a 00001-100KB


2 00002-50.1KB

@ 00003-50KB

Select a folder 🕨 🖲

 For screen components, see Step 2 in "Displaying Images" (P227).

Select a file 🕨 🖲



File name

Playback elapsed time/Maximum playback time

3 Control Key

Shows available Multi-function keys.

Playback progress bar

Shows the playback elapsed time.

Key operations on the Flash playback screen

Key	Description
$\odot \odot $	Pause/Play
\bigcirc	Stop
Θ	Play the previous/next file
•/•	Increase/decrease the volume

Function Menu on the Flash File List Screen

Flash file list screen (P232) ♦ Select a file ♦ _ [Function] ♦ Perform the following operations

Now Playing

Show the Playback screen for a melody played in background. \rightarrow P243

Play

Play the selected file.

Apply As

Set the selected file as a Screen Saver.

"Screen Saver"

Manage

Delete the selected file.

▶ "Delete " ▶ ▲ [Yes]

Select Multiple to

Select and delete multiple files.

▶ "Delete" ▶ Select files to delete ▶ (inc [Complete] ▶ Enter the Unlock Code ▶ (inc] Yes]

Details

Display the name and size, etc. of the selected file. →P229

Hide

Display the main menu while a melody is being played in background. \rightarrow P243

Function Menu on the Flash Playback Screen

Flash playback screen (P232) ♦ → [Function] ♦ Perform the following operations

Apply As

Set the file in playback as a Screen Saver.

"Screen Saver"

Manage

Delete the file in playback.

Delete <a>[Yes]

Properties

Display the name and size, etc. of the file in playback. \rightarrow P229

Video Quality

Set the quality of the file in playback.

Good : The lowest quality.

- Better : The standard quality.
- Best : The highest quality.

Replay

Play the file from the beginning.

Video/i-motion Player

Playing Videos/i-motion Movies

You can play video clips you have captured, or i-motion movies obtained from sites or i-mode mail.

Available file formats

File Format*1	MP4 (Mobile MP4)
Encoding Method	MP4 file Graphics: MPEG-4, H. 263 Audio: AMR, AAC
File Extension*2	mp4, 3gp, 3ga

- *1: Even if a file is in a compatible file format, it may not play, depending on the file.
- *2: A file with sound only is saved in "Melody" even if the file extension is mp4, 3gp, or 3ga.

🕨 🥰 (Databox) 🕈 "i-motion"



i-motion screen

Select a folder 🕨 🖲

 For screen components, see Step 2 in "Displaying Images" (P227).

i-motion (All)	
EI HELLOMOTO	
🖽 Media Street Sce…	=
🗊 Tech Move On Up	=
i-motion file I	ist

screen

Contraction of the second seco

File name

Select a file ()

- Playback elapsed time/Maximum playback time
- Control Key
 - Shows available Multi-function keys.
- Output: Out
- Key operations on the i-motion playback screen

Key	Description
$\bullet \bullet \bullet$	Pause/Play
\bigcirc	Stop playback
	Play the previous file
0	Play the next file
(Hold down)	Keep the movie/sound rewinding while pressed
(Hold down)	Keep the movie/sound fast forwarding while pressed
•/•	Adjust the volume

When the telop has highlighted text

After i-motion playback ends, a confirmation screen opens asking whether to use Phone To/AV Phone To/Web To/Mail To. Press 📥 [Yes].

If you want to use these functions during i-motion playback, press ●/(⑤)/• ◆ ●.

Note

 Removing the battery pack for an extended period of time may reset the date and time on the FOMA handset. In this case, an i-motion movie that has a limited valid period cannot be played.

Function Menu on the i-motion Screen

i-motion screen (P233) ▶ → [Function]

Perform the following operations

Show the Playback screen for the melody played in background. \rightarrow P243

Now Playing

Create New

Start the Video Camera.

- Using the Video Camera →P147
- "i-motion"

i-motion Setup

Set a playback method of videos/i-motion movies. →P235

Hide

Display the main menu while a melody is being played in background. \rightarrow P243

Function Menu on the i-motion File List Screen

i-motion file list screen (P233) ♦ Select a file ♦ ▲ [Function] ♦ Perform the following operations

Now Playing

Show the Playback screen for the melody played in background. \rightarrow P243

Play

Play the selected file.

Add To Album

Add the selected file to an Album.

Select an album

· Enter an album name if you select "[Create New Album]".

Edit

Edit the selected file. →P236

Create New

- Start the Video Camera.
- Using the Video Camera →P147
- "i-motion"

Filter by

List all files in the specified storage location.

"Storage location" All : Display all files saved on the FOMA

 handset/microSD memory card.

 Phone Memory :
 Display only files saved on the FOMA handset.

 microSD
 :
 Display only files saved on the microSD memory card.

Send

in Email	:	Create i-mode mail with the file attached. Go to Step 2 in "Creating and Sending i-mode Mail" (P184).
to IrDA	:	Send 1 file using Infrared communication.
to Bluetooth	:	Send via Bluetooth. Go to Step 2 in "Registering and Connecting a Bluetooth Device" (P273).

Apply As Set the selected file as a Screen Saver or ringtone.

		j
Phonebook Entry	:	Set to a Phonebook entry. Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97).
Voice Call Alert	:	Set as the voice call ringtone.
Video Call Alert	:	Set as the video call ringtone.
Mail Message Alert	:	Set as the Email or SMS ringtone.
Message R Alert	:	Set as the MessageR ringtone.
Message F Alert	:	Set as the MessageF ringtone.
Datebook Alarm Alert	:	Set as the Schedule event or Task alarm tone.
Screen Saver	:	Set as the Screen Saver.

Manage

Manage						
Rename :	Edit the name of the selected file. Enter a file name					
Delete :	: Delete the selected file. ▶[Yes]					
Move :	: Move the selected file to the handset or the microSD memory card.					
Copy : Copy the selected file to the FOMA handset or the microSD memory card.						
Select Mu	Itiple to					
Add To Alk	 Select multiple files and save to an Album Checkmark to files to be saved in the album Complete] Select an album Enter an album name if you select "[Create New Album]". 					
Delete	 Select and delete multiple files. Checkmark to a file to delete ▶ in [Complete] ▶ Enter the Unlock Code Im [Yes] 					
Move	 Select multiple files and move to the FOMA handset/microSD memory card. Checkmark to a file to move					
Сору	 Select multiple files and copy to the FOMA handset/microSD memory card. Checkmark to a file to copy Image: The second second					

Display the file name, size and type, etc. of the selected file. \rightarrow P236

i-motion Setup

Set a playback method of videos/i-motion movies. →P235

Hide

Display the main menu while a melody is being played in background. $\rightarrow P243$

Function Menu on the i-motion Playback Screen

i-motion playback screen (P233) [Function] Perform the following operations

Bluetooth/Handset

Switch the sound of the video/i-motion movie in playback to listen from a connected Bluetooth device/FOMA handset.

Edit

Edit the video/i-motion in playback. →P236

Create New

Start the Video Camera. Using the Video Camera →P147

"i-motion"

Send

in Email	:	Create i-mode mail with the file attached. Go to Step 2 in "Creating and Sending i-mode Mail" (P184).
to IrDA	:	Send 1 file using Infrared communication.
to Bluetooth	:	Send via Bluetooth. Go to Step 2 in "Registering and Connecting a Bluetooth Device" (P273).

Apply As

Set the file in playback as a Screen Saver or ringtone.

Phonebook Entry :	Set to a Phonebook entry. Go to Step 2 in "Saving Contacts to the Phonebook from Received Calls or Dialed Calls" (P97).
Voice Call Alert	Set as the voice call ringtone.
Video Call Alert	Set as the video call ringtone.
Mail Message Alert	Set as the Email or SMS ringtone.
Message R Alert	Set as a ringtone for MessageR.
Message F Alert	Set as a ringtone for MessageF.
Datebook Alarm Alert:	Set as the Schedule event or Task alarm tone.
Screen Saver	Set as the Screen Saver.

Manage

Rename	Change the name of the file. Enter a file name
Delete :	Delete the file in playback.
Move :	Move the file in playback to the handset or the microSD memory card.
Сору	Copy the file in playback to the FOMA handset or the microSD memory card.
Details	

Display the file name, size and type, etc. of the file in playback. →P236

i-motion Setup

Set a playback method of videos/i-motion movies. →P235

Zoom

Fit-to-screen : Display a video in full screen.

Original Size : The saved file is displayed in the saved actual size. Use 🚯 to move up, down, left and right.

Note

Apply As

- · The following videos/i-motion movies cannot be set as Chaku-motion or Incoming call screen:
 - Files that were sent to a PC or another FOMA handset via Infrared communication or Data Link Software and sent back to the FOMA handset.
 - Files that were copied or moved from the microSD memory card to the FOMA handset (including files that were copied or moved from the handset to the microSD memory card and copied or moved back to the handset.)

Manage

If you move/copy a file to Phone or microSD memory card, the file will be saved in "i-mode/Other" folder.

Setting a Playback Method of Videos/ i-motion Movies

Default Auto Repeat: Off Fit-to-screen: Off

i-motion screen (P233)/i-motion file list screen (P233)/i-motion playback screen (P233) Implies [Function] Implies "i-motion Setup"

i-motion Setu Auto Repeat: Off Fit-to-screen: Off



Perform the following operations

Auto Repeat

Set whether automatically repeat the playback of i-motion movies.

- Off : Playback is not automatically repeated.
- On : The same file is repeatedly played.

Fit-to-screen

Set whether to display movies in accordance with the screen size when i-motion movies are played.

"Off"/"On"

Note

Fit-to-screen

 When videos or i-motion movie containing text are played with Fit-to-screen, the text will not be displayed.

Viewing Video/i-motion Movie Information

i-motion file list screen (P233)/i-motion playback screen (P233) ♦ [Function] ♦ "Details" ♦ "File Details"

Information displayed on the File detail screen

• If there is no information, "Unknown" is displayed.

Item	Description
Title	Display the default title of the file
Filename*	Display the file name
Author	Display the creator
Date Stored*	Display the saved date and time
File Size	Display the file size
Copyright	Display copyright information
Description	Display the file explanation
Type*	Display the file format
Tone*	Display the sound format
Resolution*	Display the resolution
Ringtone Setting	Display whether the file can be set as a ringtone
Incoming Screen Setting	Display whether the file can be set as an Incoming call screen
File Restriction	Display whether the file is restricted

*: Not shown during i-motion playback.

Edit Videos/i-motion Movies

Editing Videos/i-motion Movies

You can edit videos/i-motion movies. The edited video/i-motion movie is saved in the same folder as the source file.

- The pre-installed files cannot be edited.
- Some files may not be edited.
- The Telop displayed on i-motion movies cannot be edited.

Extracting a Video

You can extract a part of a video/i-motion movie.

i-motion file list screen (P233)/i-motion playback screen (P233) ♦ [Function] ♦ "Edit"

Extract still
Compress
Delete trask
Record andlo
Video/i-motion

movie edit screen

9 "Extract clip"

Press () to play a video/i-motion movie.

3 Specify a start point for cropping ♦ ▲ [Pause] ♦ ▲ [Select] ♦ Perform the following operations

Extract new clip up to point

Crop and save the video up to the selected start point.

Extract new clip after point

Crop and save the video beyond the selected start point.

Select end point

Specify a start point for cropping.

Press ^(b) to play a video/i-motion movie → Specify an end point for cropping → ^(b) [Pause] → ^(b) [Select] → ^(b) [Yes]

Extract i-mode mail (small) after point Extract the video beyond the selected start point to 290 Kbytes or smaller and save it.

Extract i-mode mail (large) after point

Extract the video beyond the selected start point to 490 Kbytes or smaller and save it.

Save the edited file

- To overwrite "Replace existing file" ◆ Press → [Yes].
- **To save as another file** Select "Save as new file" and go to Step 5.
- 🗧 "File Name" 🕨 🗩 🗭 🕈 Enter a file name
- Storage Location"
 Phone"/
 "microSD"

Complete]

Edit Videos/i-motion Movies

Extracting a Frame of a Video as a Still Image

You can extract a still image from a video/ i-motion movie

An extracted image is saved in the "i-mode/ Other" folder in "My Pictures".

Video/i-motion movie edit screen (P236)

"Extract still"

Press () to play a video/i-motion movie.

Select an image to extract **b** [Pause]

ISelect

To cancel editing Press Icancel].

[Save] ♦ [Yes]

Save the edited file

· Go to Step 5 in "Extracting a Part of a Video as a Still Image" (P236).

Compressing Videos

Compress the video content in a file to the size that can be attached to i-mode mail.

· This option is not available for files of 290 Kbytes or smaller.

Video/i-motion movie edit screen (P236) "Compress"

i-mode mail (small) : Compress the file to 290 Kbytes or smaller.

i-mode mail (large) : Compress the file to 490 Kbytes or smaller.

Save the edited file

· Go to Step 4 in "Extracting a Part of a Video as a Still Image" (P236).

Deleting Sounds or Graphics from Videos

Video/i-motion movie edit screen (P236) "Delete track"

Video track : Delete only graphics. Audio track : Delete only sounds. Ticker track : Delete only the Telop.

Save the edited file

· Go to Step 4 in "Extracting a Part of a Video as a Still Image" (P236).

Note

 Video/i-motion movie files from which graphics are removed are saved in "i-mode/Other" in the "Melody" folder.

Recording Sounds of Videos

- Video/i-motion movie edit screen (P236)
 - "Record audio" > Perform the following operations

Record new track

Record new sound.

If the second to stop recording

Use existing audio file

Record a melody saved on the FOMA handset.

- Select a melody
- Isave As
- After dubbing, (:You can confirm by playing i-motion. →P233
- After dubbing, I (Cancel): Exit without saving.

Save the edited file

· Go to Step 4 in "Extracting a Part of a Video as a Still Image" (P236).


Picture Albums/i-motion Albums

Using Albums


You can save files in My Pictures or the i-motion folder to Albums to help manage them.

Creating an Album

My Picture screen (P227)/i-motion screen(P233)
 "Picture Albums"/ "i-motion Albums"



- The most viewed/played 20 files are displayed.
- 2 User-defined Albums
- The created Album name is displayed. Create New Album
- Create a new Album.

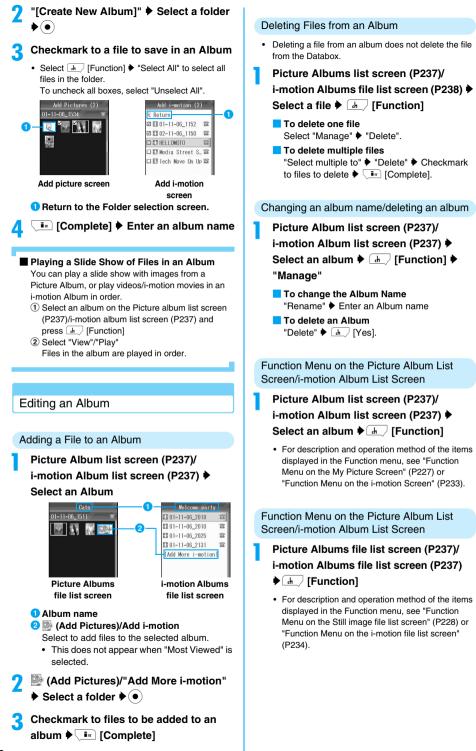

What is Chara-den?

Chara-den is an animation character that can be sent to the other party as an alternate image instead of your own image during a video call. You can move the character by pressing Dial Keys.

Chara-den registered by default





©BVIG

Pre-installed Chara-den

· Pre-installed Chara-den characters do not perform Partial action.

Key	DeeJ	Dimo
1.0	Happy!	Нарру
^ac2*	Angry	Sorry
er3	Cry	Bleah
4	Wow!	Love
	Thanks	Sleep
mino 6	Sorry	Drunk
7 ^B RORE	Вуе	Rapper
тич 8 ¢	Yes!	Sadness
wx729	No!!	Munch's Scream

Displaying Chara-den to Operate

● ♦ 🔍 (Databox) ♦ "Chara-den"





Select a folder (•)

· For icons displayed on the screen, see "Icons displayed on the still image file list screen" (P227).



Chara-den file list screen

Select Chara-den (•)



display screen

1 File name

2 Action modes

2: Full Action Mode

The character uses the whole body to express emotions.

E: Partial Action Mode

The character uses a part of the body to express emotions.

Control Kev

Show available Multi-function keys.

4 Bar

Show the sequence number of the file saved in the folder.

Key operations on the Chara-den display screen

Key	Description
\odot	Display the previous/next file
٢	Enlarge the image/Restore the original display size
$ \mathbf{O} $	Open the File detail screen \rightarrow P240

Operating a character

You can move the character by pressing Dial Keys. The character can move in the Full action mode or Partial action mode.

(P240)

Function Menu on the Chara-den File List Screen

Chara-den file list screen (P239) ♦ Select the following operations

Now Playing

Show the Playback screen for the melody played in background. →P243

Plav

Display the selected Chara-den.

Enter V-Phone No.

Make a video call using the selected Chara-den as the alternate image. →P85

Apply As

Set the selected Chara-den as the alternate image for the video call.

"Camera OFF Image"

Manage

Delete the selected Chara-den.

"Remove" <a>[Yes]

Select Multiple to

Select and delete multiple Chara-den.

"Delete" Checkmark to Chara-den to delete [Complete] Enter the Unlock Code . [Yes]

Details

Display the name, size and type, etc. of the selected Charaden. →P240

Hide

Display the main menu while a melody is being played in background. →P243

Function Menu on the Chara-den Display Screen

Chara-den display screen (P239) [Function] Perform the following operations

Enter V-Phone No.

Make a video call using the Chara-den in display as the alternate image. →P85

Set Chara-den

Set the displayed Chara-den as the alternate image for video calls.

Detail Info

Display the name, size and type, etc. of the displayed Chara-den. →P240

Delete

Delete the Chara-den in display.

▶ Image: Ima

Change Size

Change the display size of a Chara-den image.

- (): Zoom the image.
- (): Restore the previous display size.

Chara-den Function

Change Action :	Switch between Partial action mode and
	Full action mode.

Action List : List all character actions assigned to keys.

Displaying Information about the Chara-den

Chara-den file list screen (P239)/ Chara-den display screen (P239) [Function] Information"

"File Details"

Information displayed on the File detail screen

If there is no information, "Unknown" is displayed. •

Item	Description
Title	Display the default title of the file
Filename	Display the file name
Size	Display the file size
Туре	Display the "Chara-den"
Data Acquisition	Display the author
Resolution	Display the resolution
Date Stored	Display the saved date and time
Forwarding Possible	Display whether the file can be sent to another device
Apply Possible	Display whether the file can be set as the alternate image for video calls
File Restriction	Display whether the file is restricted

Melody Player

Playing Melodies

You can play pre-installed melodies or melodies downloaded from sites.

If a Flash movie with sound is played while another melody is already being played, the melody may not be played correctly.

Available File Formats

File Format*1	SMF, MFi, AAC
File Extension	mid, midi, mld, mp4*², 3gp*², 3ga*²

- *1: Even a file in a compatible file format may not play depending on the file.
- *2: If a file contains a video, it is saved in "i-motion".

● ◆ 💽 (Databox) ◆ "Melody"




Melody screen Select a folder 🕨 🗩 🗨

· For icons displayed on the screen, see Step 2 in "Icons displayed on the still image file list screen" (P227).

Melody (All)	
√301.Ambient	-
J⊒ 02.Nocturne	8
Ja 03.Flowers	8
J∂04.Soaring High	=
Ja 05.Solar	8
Ja 06.Beats	8
J≅ 07.Vapor	8
Melody file I	ist
screen	

screen

Select a file () Melodies in the selected folder will be played in order.



File name

- Playback elapsed time/Maximum playback time
- Control Key

Show available Multi-function keys.

4 Playback progress bar Show the playback elapsed time.

Key operations on the Melody playback screen

Кеу	Description
$\bullet \bullet \bullet$	Pause/Play
\bigcirc	Stop melody playback
	Play the previous file
() () () () () () () () () () () () () (Play the next file
(Hold down)	Keep the melody rewinding while pressed
(Hold down)	Keep the melody fast forwarding while pressed
•/•	Adjust the volume


Playing a melody with the FOMA handset closed

If you fold the FOMA handset during melody playback, the artist name and song title are displayed on the Sub-display. You can continue playing the music.

Operation with the FOMA handset closed

When you close the FOMA handset during melody playback, the Melody playback screen opens. To open the Song title list, press •

• The Song title list screen returns to the Melody playback screen after 5 seconds. However, if a melody is paused, the Melody playback screen will not return. To open the Melody playback screen, play a melody.



Artist name

If the artist name is not registered, "作者なし (No author name)" is displayed.

- 2 Song title/File name
- Output States and Annual St
- Key operation on the Melody playback screen

Кеу	Description
·	Open the Song title list
·/,	Adjust the volume

Key operation on the Song title list

Key	Description
·	Pause/Play
*/,	Play the previous/next file

Function Menu on the Melody Screen

Melody screen (P241) ♦ ♣ [Function]

Perform the following operations

Now Playing

Show the Playback screen for the melody played in background. →P243

Melody Setup

Set whether to play the melody in the folder repeatedly.

"Auto Repeat"

- Off : Play melodies in the folder once.
- On : Play melodies in the folder repeatedly.

Hide

Display the main menu while a melody is being played in background. →P243

Function Menu on the Melody File List Screen

Melody file list screen (P241) ♦ Select a file ♦ 👍 [Function] ♦ Perform the following operations

Now Playing

Show the Playback screen for the melody played in background. \rightarrow P243

Play

Play the selected melody.

Add To Playlist

Save the selected melody to a Playlist.

- Select a playlist
- · Enter a playlist name if you select "[Create New Playlist]".

Filter by

List all melodies in the specified storage location.

"Storage Location"

•	
All	: Display all melodies saved on the FOMA handset/microSD memory card.
Phone Memor	 Display only melodies saved on the FOMA handset.
microSD	: Display only melodies saved on the microSD memory card.
Send	
In Email :	Create i-mode mail with the melody attached. Go to Step 2 in "Creating and Sending i-mode Mail" (P184).
to IrDA :	Send 1 file using Infrared communication.
to Bluetooth :	Send via Bluetooth. Go to Step 2 in "Registering and Connecting a Bluetooth

Apply As

Set the selected melody as a ringtone, etc.

Device" (P273).

Voice Call Alert	Set as a ringtone for a voice call.
Video Call Alert	Set as the video call ringtone.
Mail Message Alert :	Set as the Email or SMS ringtone.
Message R Alert	Set as the Message R ringtone.
Message F Alert :	Set as the Message F ringtone.
Datebook Alarm Alert:	Set as the Schedule event or Task alarm tone.
	alami lone.

Manage

Rename	Edit the name of th Enter a file name	e selected melody.
Delete	Delete the selected ▶ _ ♣_[Yes]	l melody.
Move		melody to the FOMA roSD memory card.
Сору		melody to the FOMA roSD memory card.

Select Multiple to

Select Multiple	10
Add to Playlist	 Select multiple melodies and save to a Playlist. Checkmark to melodies to be saved in a playlist im [Complete] Select a playlist im [Complete] Select a playlist im the save is saved in the same if you select "[Create New Playlist]".
Delete	 Select and delete multiple melodies. Checkmark to melodies to delete
Move	 Select and move multiple melodies to the FOMA handset/microSD memory card. Checkmark to melodies to move in [Complete] imicroSD"/ "Phone"
Сору	 Select and copy multiple melodies to the FOMA handset/microSD memory card. Checkmark to melodies to copy i: [Complete] * "microSD"/ "Phone"
-	

Details

Display the name, size and type, etc. of the selected melody. \rightarrow P243

Melody Setup

Set whether to play the melody in the folder repeatedly.

"Auto Repeat"

- Off : Play melodies in the folder once.
- On : Play melodies in the folder repeatedly.

Hide

Display the main menu while a melody is being played in background. \rightarrow P243

Function Menu on the Melody Playback Screen

Melody playback screen (P241) [Function] Perform the following operations

Bluetooth/Handset

Switch the sound of the melody in playback to be heard from a connected Bluetooth device/FOMA handset.

Send

In Email	:	Create i-mode mail with the melody attached. Go to Step 2 in "Creating and Sending i-mode Mail" (P184).
to IrDA	:	Send 1 file using Infrared communication.
to Bluetooth	:	Send via Bluetooth. Go to Step 2 in "Registering and Connecting a Bluetooth Device" (P273).

Set the melody in playback as a ringtone.

Voice Call Alert	:	Set as the voice call ringtone.
Video Call Alert	:	Set as the video call ringtone.
Mail Message Alert	:	Set as the Email or SMS ringtone.
Message R Alert	:	Set as the MessageR ringtone.
Message F Alert	:	Set as the MessageF ringtone.
Datebook Alarm Alert	:	Set as the Schedule event or Task alarm tone.

Manage

Rename	 Edit the name of the melody in playback. Enter a file name
Delete	: Delete the melody in playback. ♦ ▲ [Yes]
Move	: Move the melody in playback to the FOMA handset or the microSD memory card.
Сору	: Copy the melody in playback to the FOMA handset or the microSD memory card.

Details

Display the name, size and type, etc. of the melody in playback. \rightarrow P243

Melody Setup

Set whether to play the melody in the folder repeatedly.

- "Auto Repeat"
- Off : Play melodies in the folder once.
- On : Play melodies in the folder repeatedly.

Hide Player

Display the main menu while a melody is being played in background. \rightarrow P243

Viewing Melody Information

Melody file list screen (P241)/Melody playback screen (P241) ♦ [Function] ♦ "Details" ♦ "File Details"

Information displayed on the File detail screen

- If there is no information, "Unknown" is displayed.
- The displayed information varies depending on the file format.
- Displayed information may differ on the Melody file list screen from the Melody playback screen.

Item	Description
Title	Display the default title of the file
Filename	Display the file name
Artist	Display the information about the author
Date Stored	Display the saved date and time
Length	Display the playback time
Size	Display the file size
Bit Rate	Display the bit rate

Item	Description
File Size	Display the file size
Copyright	Display the copyright information
Description	Display the file explanation
Туре	Display the file format
Tone	Display the sound format
Resolution	Display the resolution
Ringtone Setting	Display whether the file can be set as a ringtone
Incoming Screen Setting	Display whether the file can be set as an Incoming call screen
File Restriction	Display whether the file is restricted

Using Another Function While Playing a Melody

While a melody is played in the background, you can perform other operations on the FOMA handset.


 Data cannot be received via Bluetooth or Infrared while a melody is being played in the background.

Melody playback screen (P241) ♦ [Function] ♦ "Hide Player"

Switch the melody in playback to background and open the Main Menu.

Operating on melodies from the Wallpaper screen Press in [Exit] on the main menu screen, the Wallpaper screen opens, the title

of the melody in



playback and Control keys are displayed.

Song Title

Display the title of the melody in playback. 2 Control keys

: Play the previous/next file

🔈 Select a menu item 🕨 💿


Select a desired item from each menu.

When you perform the following operations while playing a melody in the background When a voice call/video call arrives

The ringtone sounds and the melody is stopped. When the call is finished, the melody will be played automatically.

When you start the Camera

The melody is played continuously. However, when you press the shutter, the shutter tone sounds. When capturing is finished, the melody will be played automatically.




The melody is stopped. If you terminate the video camera, the melody will be played automatically.


When you start an i-appli

The sound set for the i-appli takes precedence. When the sound of the i-appli is finished, the melody will be played automatically. However, when you have set the sound of i-appli not to sound in advance, the melody is played even while starting an i-appli.

When you play video/i-motion

The melody is stopped. If you terminate the video/ i-motion, the melody will be played automatically.

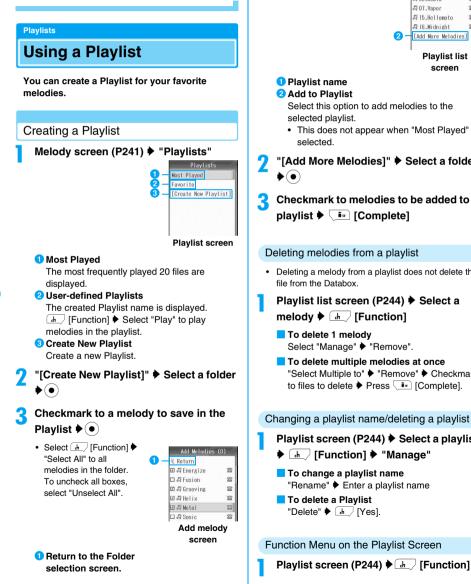

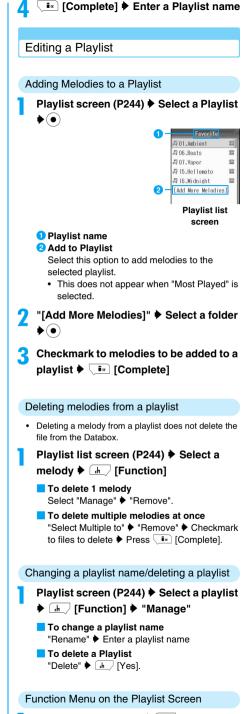

· For description and operation method of the items displayed in the Function menu, see "Function menu on the Melody file list" (P242).

Function Menu on the Playlist List Screen

Plavlist list screen (P244) > Select a melodv

· For description and operation method of the items displayed in the Function menu. see "Function menu on the Melody file list" (P242).

Voice Notes

Using Voice Notes

Recording Voice Notes

You can record your voice when Ready or during a voice call.



Start recording.

- [Pause/Resume]: Pause/resume the recording.
- Image: Cancel is Cancel the recording.

(•

Terminate the recording.

• (cire): Delete the recorded Voice Note and return to the Voice note ready screen.

 When "Auto Save" is set to "On", the recording is saved automatically. →P246



Voice Note recordina completion screen

 File name 2 Recording time

Istore]

To record a sound now

You can record a sound by holding a down with the FOMA handset open.

- · This is not available with the FOMA handset closed.
- 1 Record sounds while holding down a with the FOMA handset open.
- 2 Release to terminate the recording.
- ③ Press [Store] to save.

Note

- If the FOMA handset is closed or <a>
 is pressed while recording, the Voice Note will be saved up to that point and the Voice Note function will terminate.
- To delete a recorded Voice Note, press (and) on the Voice Note completion screen. A Voice Note will not be deleted by pressing voi to terminate the Voice Note function or closing the FOMA handset.
- · The voice note is automatically named with the year. month, date, hour and minute of the time of recording.

Example: Recorded at 10:10 on November 1, 2006 "01-11-06_1010"

Function Menu on the Voice Note Screen

Voice Note screen (P245) [Function] Perform the following operations

Now Playing

Show the Playback screen for the melody played in background. →P243

Create New

Record a Voice Note.

- "Voice Notes"
- · Go to Step 3 in "Recording Voice Notes" (P245).

Hide

Display the main menu while a melody is being played in background. →P243

Function Menu on the Voice Note Ready Screen

Default	Voice Recorder Setup (Record Length): MMS Voice Recorder Setup (Auto Save): Off Switch Storage Device: Phone

Voice Note ready screen (P245)

Function Perform the following operations

Go To Voice Notes

List all recorded Voice Notes.

Voice Recorder Setup

Record Length		Set the recording time.
		"MMS"/"Maximum"
Auto Save	:	Set whether to save the recorded Voice Notes automatically. "Off"/"On"

Switch Storage Device

Set the saving destination for Voice Notes.

"microSD"/"Phone"

Free Space

Display the free space on the handset or the microSD memory card.

Function Menu on the Voice Note Recording Completion Screen

Voice Note recording completion screen (P245) (Function) Perform the following operations

Discard

Delete recorded Voice Notes.

Preview

Play recorded Voice Notes.

Apply as Ringtone

Set the recorded Voice Note as the Ringtone for a voice call.

Playing Recorded Voice Notes

Voice Note screen (P245) Select "Voice Notes (All)"

 For screen components, see Step 2 in "Displaying Images" (P227).

Voice Notes (A	11)
Ø Vivid	3
Ø 01-11-06_2229	
@ 01-11-06_2234	=
🖗 Spice	
₽ 01-11-06_2226	
Ø 01-11-06_2233	
🕫 Pulse	
Voice Notes	(AII)
list scree	'n

Select a file 🕨 💿



File name

- Playback elapsed time/Maximum playback time
- Control Key
 - Show available Multi-function keys.
- Output Show the playback elapsed time.
- Key Operations on the Voice Note playback screen

Key	Description
	Pause/Play
\odot	Terminate the playback of a Voice note
	Play the previous file
	Play the next file
(Hold down)	Holding the key down will fast rewind the Voice note
(Hold down)	Keep the Voice Note fast forwarding while pressed
•/ .	Adjust the volume

Function Menu on the Voice Notes (All) List Screen

Voice Notes (All) list screen (P246) ♦ Select a file ♦ → [Function] ♦ Perform the following operations

Now Playing

Show the Playback screen for the melody played in background. \rightarrow P243

Play

Play the selected Voice Note.

Add to Category

Save the selected Voice Note to a category.

- Select a Category
- Enter a Category name if you select "[Create New Category]".

Create New

Record a Voice Note.

- "Voice Notes"
- Go to Step 3 in "Recording Voice Notes" (P245).

Filter by

List all Voice Notes in the specified storage location.

"Storage location"

All	•	Display all Voice notes saved on the FOMA handset/microSD memory card.
Phone Memory	:	Display only Voice notes saved on the FOMA handset.
microSD	÷	Display only Voice notes saved on the microSD memory card.

Apply As

Set the selected Voice Note as the alternate image or to a Contact.

Voice Call Alert	Set as the voice call ringtone.
Video Call Alert	Set as the video call ringtone.
Mail Message Alert :	Set as the Email or SMS ringtone.
Message R Alert	Set as a ringtone for Message R.
Message F Alert	Set as a ringtone for Message F.
Databook Alarm Alert:	Set as the Schedule event or Task alarm tone.

Manage

Rename	 Change the name of the selected Voice Note. ♦ Enter the Voice Note name
Delete	: Delete the selected Voice Note.
Move	: Move the selected Voice Note to the handset or the micro SD memory card.
Сору	: Copy the selected Voice Note to the FOMA handset or the microSD memory card.
Select N	Iultiple to
Add to C	 ategory : Select multiple Voice Notes and save to a category. ♦ Checkmark to Voice Notes to be saved in a Category ● IComplete] ● Select a Category ● ● Enter a Category name if you select "[Create New Category]".
Delete	 Select and delete multiple Voice Notes. Checkmark to a Voice Note to

Add to Category	 Select multiple voice Notes and save to a category. Checkmark to Voice Notes to be saved in a Category
Delete	 Select and delete multiple Voice Notes. Checkmark to a Voice Note to delete <pre> is: [Complete]</pre> [Yes]
Move	 Select and move multiple Voice Notes to the FOMA handset/microSD memory card. Checkmark to Voice Notes to move in [Complete]. "microSD"/ "Phone"
Сору	 Select and copy multiple Voice Notes to the FOMA handset/microSD memory card. Checkmark to Voice Notes to copy

Details

Display the name, size, and type, etc. of the selected Voice Note. ${\rightarrow} P247$

Hide

Display the main menu while a melody is being played in background. \rightarrow P243

Function Menu on the Voice Note Playback Screen

Voice Notes playback screen (P246)
[Function] Perform the
following operations

Bluetooth/Handset

Switch the voice note in playback to listen from a connected Bluetooth device/FOMA handset.

Create New

Record a Voice Note.

- "Voice Notes"
- · Go to Step 3 in "Recording Voice Notes" (P245).

Apply As

Set the Voice Note in playback as the voice call ringtone.

"Voice Call Alert"

Manage

Rename :	Edit the name of the Voice Note in playback. Finter a file name
Delete :	Delete the Voice Note in playback.

Details


Display the name, size, and type, etc. of the Voice Note in playback. ${\rightarrow}\mathsf{P247}$

Displaying Information about a Voice Note

Voice Notes (All) list screen (P246)/Voice Notes playback screen (P246) ▶ _h_[Function] ▶ "Details" ▶ "File Details"

Information displayed on the File detail screen
 If there is no information, "Unknown" is displayed.

Item	Description
Title	Display the default title of the file
Filename	Display the file name
Artist	Display the creator of the file
Date Stored	Display the saved date and time
Length	Display the maximum playback time
Size	Display the file size
Bit Rate	Display the bit rate
Туре	Display the file format
File Restriction	Display whether the file is restricted

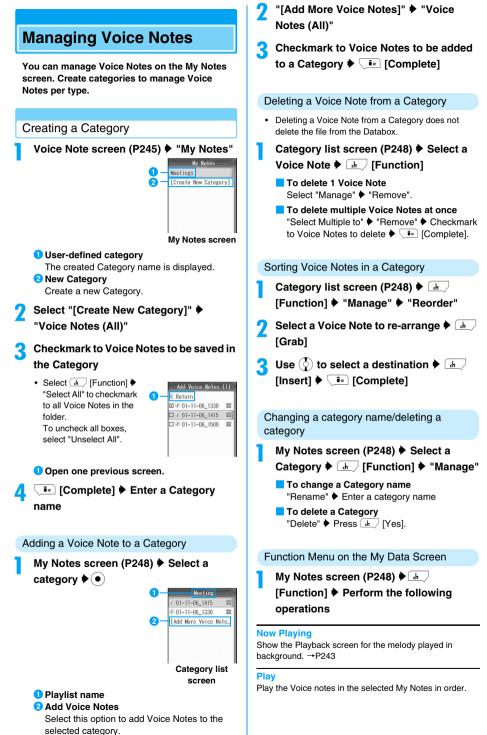

Create New

Voice Note :	Record a Voice Note. Go to Step 3 in "Recording Voice Notes" (P245).
Category :	Create a new category. Go to Step 2 (P248)
Manage	
	dit the name of the Category. Enter a Category name
	elete a selected Category.
	, t ==,

Hide

Display the main menu while a melody is being played in background. →P243

Function menu on the Category list

Category list screen (P248) > Select a Voice Note

[Function]

· For description and operation method of the items displayed in the Function menu, see "Function Menu on the Voice Notes (All) List Screen" (P246).

microSD Memory Cards

You can insert a microSD memory card into the handset and use it as external storage. A microSD memory card is a small size and lightweight, removable external storage media with a large capacity.

- The FOMA M702iG handset supports microSD memory cards of up to 1G bytes (commercially available) (as of November, 2006). The operation of microSD memory cards manufactured by SanDisk, Toshiba, and Kingmax have been verified. However, DoCoMo does not guarantee the proper operation of microSD memory cards of these companies.
- · You can purchase microSD memory cards and microSD memory card adapters from electric appliance stores, large department stores, etc.

Cautions on Using MicroSD Memory Cards

- microSD memory cards formatted by another device such as a PC may not be usable on the FOMA handset. Use microSD memory cards formatted by the FOMA M702iG handset. →P250
- microSD memory cards may lose data or deform due to an accident or failure of the handset. It is recommended that you make a copy of important data and keep it in a separate place. DoCoMo is not responsible for loss or alteration of data.
- It may take a while to communicate depending on the amount of data to transfer. And, the data may not be copied.
- Do not turn the handset power off while data is being read or written.

- Do not unplug the FOMA USB (optional) Cable while data is being read or written, or a microSD is being formatted. Unplugging the cable may result in data loss.
- Never remove the microSD memory card while the card is being accessed such as when data from the card is being displayed or the storage capacity of the card is being checked.
- · Do not put labels or stickers on microSD memory cards. Even the thickness of labels may cause contacts failure or data corruption.
- · Do not touch the contacts with your hand or metal object.
- Do not apply strong force, do not bend or drop, and do not let the card become wet.
- Do not leave a removed microSD memory card in the reach of small infants. They may swallow the card and iniurv mav result.
- · When inserting/removing the microSD memory card, do not place your face close to the card because the card may suddenly eject when you release your fingers. Also, do not let small children handle the card. Injury may result.
- Do not use or store the card in the following places: - In extremely high temperatures such as inside a very hot car or under scorching heat
 - In direct sunlight
 - In an environment with high humidity or corrosive substances
 - In a place where it can be affected by static electricity or electrical noise


Inserting/Removing a microSD Memory Card

 Turn the FOMA handset power off and remove the battery pack before inserting/removing the microSD memory card.

Insertina

Remove the Rear Cover and the battery pack first. →P42

Insert the microSD memory card with the right side up, carefully in the direction of the arrow 1 until it clicks.




 Insert the microSD memory card correctly. If the card is not inserted correctly, the card cannot be used.

Removing


Remove the Rear Cover and the battery pack first. \rightarrow P42

Lightly press the microSD memory card lightly in the direction of arrow **1**

The microSD memory card pushes out a little.



Pull the microSD memory card straight out in the direction of arrow 2



Note

Do not use excessive force to pull out the microSD memory card.

Using a microSD Memory Card

You can move or copy files saved in the Databox on the FOMA handset, such as still images, video clips or i-motion movies, to the microSD memory card, and you can view files saved from a PC to the microSD memory card on the FOMA handset.

 Phonebook entries, Datebook entries, and mail messages saved on the FOMA handset cannot be copied/moved to the microSD memory card. Also, Phonebook entries, Datebook entries, and mail messages saved on the microSD memory card from another FOMA handset cannot be displayed on this FOMA handset.

Formatting a microSD Memory Card

Format (initialize) a microSD memory card so that it can be used for the FOMA handset.

Databox screen (P226) 🕨 🖃 [Function]

"Format micro SD"

A warning indicating all data will be deleted appears. Select whether you want to continue to format.

2 🖃 [Yes]

Note

- In order to use a microSD memory card with this FOMA handset, use this handset to format the card.
- Formatting a microSD memory card deletes all saved files on the card. Do not lose important data by mistake.
- Voice/video calls cannot be received while formatting.

Viewing/Playing Files on the microSD Memory Card

You can view/play files on the memory card in the same way as ones on the FOMA handset using the "Databox".

- "Displaying Images" →P227
- "Playing Videos/i-motion Movies" →P233
- "Playing Melodies" →P240

Note

- If files on the microSD memory card cannot be viewed on the "Databox" list screen, select "Filter by" > "Storage Location" > "All"/"microSD" from Function menu.
- · Some files may not be viewed/played.

Copying/Moving Files between the FOMA Handset and a Memory Card

You can copy/move files from the memory card in the same way as ones from the FOMA handset using the "Databox".

- "Managing Files" using the "Function Menu on the Still Image File List Screen"/"Function Menu on the Still Image Display Screen" → P228, P229
- "Managing Files" using the "Function Menu on the i-motion File List Screen"/"Function Menu on the i-motion Playback Screen" →P232, P234
- "Managing Files" using the "Function Menu on the Melody File List Screen"/"Function Menu on the Melody File Playback Screen" →P242, P243

Using a microSD Memory Carc


Note

- · Some files may not be copied/moved.
- Flash or Chara-den saved in the this FOMA handset cannot be copied/moved to a microSD memory card.

Folder Structure on the microSD Memory Card

When you first move or copy files from the FOMA handset to the microSD memory card, or when you first save still images or video clips captured with the Camera directly to the microSD memory card, a folder compatible with the appropriate file type will be automatically created on the microSD memory card.

 When you are writing files to the microSD memory card from a PC, a file structure like the following is required:

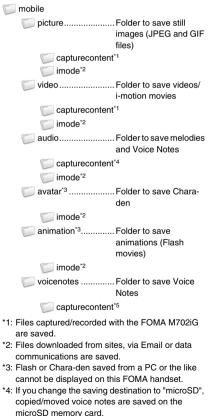

*5: The voice notes copied/moved from this FOMA handset to the microSD memory card are saved.

Number of items that can be saved on a microSD memory card

- The number of files that can be saved on the microSD memory card varies depending on the size of the microSD memory card.
- You can check the free space on the microSD memory card using "Free Space". →P227, P276

File Type	Folder	Savable Number of Files (64M byte)
Still images	picture	Up to
Video/i-motion Movie	video	approximately 640 files*
Melodies, Voice Notes	audio	including all
Chara-den	avatar	folders can be saved
Animations	animation	*: Number of
Voice Notes	voicenotes	files when you saved all 100 Kbyte-files

Note


 The microSD memory card used with this FOMA handset can be used with the FOMA M702iS.
 However, because the file structure is different from other FOMA handsets, this microSD memory card may not be usable with other FOMA handsets that has a microSD memory card slot.

Reading from and Writing to a micro SD Memory Card with the FOMA Handset

Connect the FOMA handset with a microSD memory card inserted to a PC and read data from/write data to the microSD memory card.

- To use a memory card, you need an optional memory card.
- Only a PC with Windows XP or Windows 2000 (Japanese versions) can be used to read/write to a microSD memory card. Operation under another OS is not guaranteed.
- In order to use the FOMA handset as a means of reading from/writing to the microSD memory card, you need to set up the USB mode. Disconnect the FOMA USB cable (optional) before setting the USB mode.

● ◆ 🐏 (Connection) ♦ 🐼 (USB Mode Setting) ♦ "Default Connection"

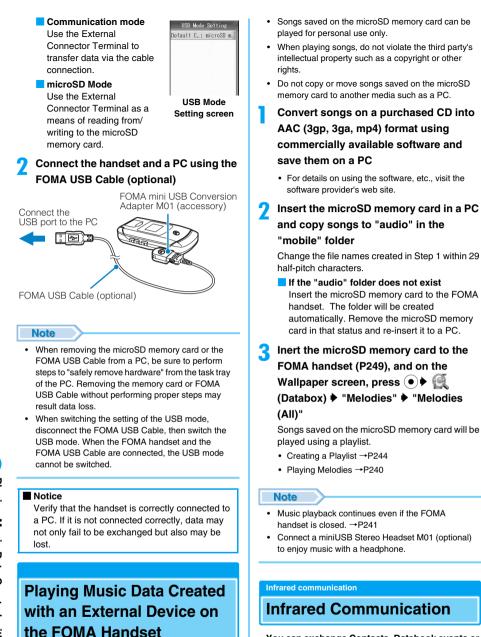

You can save purchased songs on a CD to the

To use a memory card, you need an option memory card. You can purchase microSD memory cards from an electric appliance store,

on the FOMA handset.

microSD memory card using a PC and play them

You can exchange Contacts, Datebook events or Bookmarks with a device equipped with infrared communication capabilities.

etc.

Available Data for Data Transfer

Data type	Available to receive		Available to send		Number of items	
	One	All	One	All	to be stored	
Phonebook entries (Personal data)	0	0	0	0	See P92	
Schedule events*1	0	×	0	×	Up to 350*3	
Tasks*2	0	×	0	×	Up to 350*3	
Received mail	0	0	0	0	Up to 500	
Sent mail	0	0	0	0	Up to 300	
Unsent mail	0	0	0	0	0010300	
Image files*4	0	×	0	×	Unlimited*5	
Video clips*4	0	×	0	×	Unlimited*5	
Melodies*4	0	×	0	×	Unlimited*5	
Bookmarks	0	0	0	0	Up to 200	

*1: Schedule events that have expired cannot be sent.

*2: When you receive a task that an alarm is set, the alarm setting is not registered and "Reminder" is set to "Off". If you want to set an alarm, set the Reminder with this FOMA handset.

- *3: The total saved number of schedule events and tasks.
- *4: Up to 300 Kbytes of data per file can be sent or received.
- *5: There is no limit for the number of pieces of data available to be sent or received. This varies depending on the free space on the FOMA handset.

Saving destination of data received via Infrared

Data type	Storage Location	Saved Data Arranged by
Phonebook	Phonebook	Kana \rightarrow alphabetic \rightarrow number order of Name
Schedule events	Schedule events	Schedule start date
Tasks	Tasks	Task start date
Received mail	"Main folder" in "Inbox"	Received date and time
Sent mail	Main folder	Sent date and time
Unsent mail	Main folder	Saved date and time

Data type	Storage Location	Saved Data Arranged by
Still images	"i-mode/Other" folder in "My Pictures" in "Databox"	File name (number → alphabetic → kana order)
Videos	"i-mode/Other" folder in "i-motion" in "Databox"	File name (number → alphabetic → kana order)
Melodies	"i-mode/Other" folder in "Melody" in "Databox"	File title (number → alphabetic → kana order)*
Bookmarks	Main folder	At the top

*: If the melody does not have a title, it is saved in the order of name (numeric → alphabetic → kana order).


Notice

The stored content may be lost due to the handset failure or repair. DoCoMo is not responsible for lost data. It is recommended that you keep saved content from the handset on a microSD memory card. You can connect the handset to a PC using Data Link Software and a FOMA USB Cable (optional) and save data to the PC.

Infrared communication

Performing Infrared Communication

- When performing infrared communication, open the FOMA handset 90 degrees as the following figure.
- Use the devices of approximately 20 cm.
- Do not move the FOMA handset until data exchange completes.
- If you hold the FOMA handset in your hand, secure the terminal so that it is not shaky.



Cautions on Data Transfer

 Data may not be transferred depending on the other party's FOMA handset conditions. Depending on the other party's handset model, the filter setting of received mail or Bookmarks, or category setting of Phonebook entries may not be reflected, or the content of Deco-mail may not be saved correctly.

- By the communication between this FOMA handset and an infrared communication device other than FOMA M702iG, data may not be received correctly, or data may not be displayed correctly on the receiver.
- Communication may take a while depending on the amount of data to be transferred. Also, the data may not be received correctly.
- Communications may not be performed successfully under direct sunlight, directly under a florescent light, or near another infrared device, due to possible interference.
- If an i-mode mail message has attached data, the data will not be quoted.
- Attachments to i-mode mail are also forwarded. However, some types of attachments may not be forwarded.
- When a message text contains pictographs (E-Moji) or symbols, they may not be displayed correctly on a recipient handset or PC that is not capable of displaying them.
- Infrared communication is not available when Phone Lock, Lock Application or Self Mode is activated.
- When another function is running, Infrared communication is not available.

Ir data/IrDA link

Exchanging Data One Piece at a Time

Sending Data 1 Piece at a Time

- Set the device on the receiving side to infrared receiving mode before sending data.

"Infrared"/"to IrDA"

Start infrared communication.

Note

 A message appears if the destination cannot be found. Verify the distance and angle with the other side.

Receiving Data One Piece at a Time

● ◆ 📲 (Connection) ◆ 🕤 (Infrared Link) ◆ 🖟 [Start]

- Perform the infrared transmission operation on the sending side device.
- [Stop]: Terminate the infrared communication mode.

🖃 🕞 [Accept]

Start the infrared communication.

Save data

- When Mail or a Bookmark is received The received data is saved automatically.
- When a Phonebook entry is received
- When an image is received ↓ Store] ♥ "Save" ♥ Enter a file name.

After saving data 🕨 🖅 [Stop]

The Infrared communication mode is terminated.

Note

- A Phonebook entry of up to 65 Kbytes can be received. If a Phonebook entry over 65 Kbytes is received, a message indicating that the entry is too large is displayed, and the entry cannot be saved.
- When a mail is received from other mobile phones than FOMA M702iG via Infrared, the destination icons of the two mail details creen.

Registration Menu on the Received Image Preview Screen

Received image display screen (P254) ♦ <u>i</u> [Store] ♦ Perform the following operations

Send in Email

Create i-mode mail with the received image attached. Go to Step 2 in "Creating and Sending i-mode Mail" (P184).

Store Only

Save the image.

Enter a file name

Apply as Wallpaper Set as Wallpaper screen.

Apply as Screen Saver Set as the Screen Saver.

Apply as "Camera Off" Image

Set the file as the alternate image for video calls. Only JPEG format files can be set.

Function Menu on the Received Image Display Screen

Discard

Delete the received image.

► [Yes]

Details

Display the file name, size and type, etc. of the received image. →P229

View Free Space

Display the free space on the handset or the microSD memory card.

Function Menu on the Received Video/ i-motion Playback Screen

Received video playback screen (P254) IFunction following operations

Plav

Play the received video.

Save

Save the received video.

[Yes] "microSD"/"Phone Memory"

File Details

Display the file name, size and type, etc. of the received file. →P236

Exit

Exit the Video playback screen and save the video.

[Yes] * "microSD"/"Phone Memory"

Function Menu on the Received Melody Playback Screen

Received melody playback screen (P254) • [Function] • Perform the following operations

Play

Play the received melody.

Save

Save the received melody.

[Yes] "microSD"/"Phone Memory"

File Details

Display the name, size and type, etc. of the received melody. →P243

Exit

End the audio menu and save the melody.

IYes] * "microSD"/"Phone Memory"

Send All/Receive All

Exchanging All Data

You can exchange all data at once with a PC or another FOMA handset.

 To exchange all data, a password is used to identify the sender and receiver correctly. The password is any 1- to 25-digit number and should be entered both in the sending and receiving devices before sending/receiving data.

Sending All Data

- Set the device on the receiving side to the infrared receiving mode before sending data.
- From a list screen showing data to be sent
 Function
 Send all entries" "Infrared"

Enter the Security Code Enter the Session Key

Start the infrared communication.

Note

- A message appears if the destination cannot be found. Verify the distance and angle with the other side.
- When a mail is received from other mobile phones. than FOMA M702iG via Infrared, the destination icons of To Tee Tee may not be displayed correctly on the received mail detail screen.

Receiving All Data

- · Receiving all data overwrites the data on the FOMA handset and deletes all saved data including protected mail. Check whether important data has been saved elsewhere before sending or receiving all data.
- Link) 🕨 🖅 [Start]

- (●) ♥ (Connection) ♥ (Infrared
- Enter the Security Code Enter the Session Key
- [Accept]

Start the infrared communication.

[H] [Yes]

After saving data

Terminate the infrared communication mode.

Note

 When a mail is received from other mobile phones than FOMA M702iG via Infrared, the destination icons of 10 cm may not be displayed correctly on the received mail detail screen.

Using the Infrared Remote Control Function


You can use the FOMA handset as a remote controller for infrared remote controlled devices. An i-appli can send remote control signals using the infrared port.

- In order to use the handset as a remote control for a device, you need to download software that is specifically designed for the device. Key operations for remote control vary depending on the software.
- · Some devices may not be controlled.
- Depending on the controlled device or ambient brightness, communications may not be possible.
- When Self-mode is set, the infrared remote controller cannot be used.

Infrared Remote Control Operations

Hold the Handset within 4 meters of, and with the Infrared Port pointed directly at the remote control sensor of a TV, etc. to operate. Depending on the controlled device and ambient brightness, remote control may not be possible.

Infrared reception part



Other Convenient Functions

Multiaccess <multiaccess></multiaccess>	258
Multitask <multitask></multitask>	258
Emitting Alarm at Specified Time < Alarm Clock>	259
Managing Schedule/Task	261
Registering Your Name and/or Image < My Personal Info>	265
Checking Call Duration/Cost	266
Setting Credit Limit <credit limit=""></credit>	267
Setting Unit of Credit Limit <currency setup=""></currency>	268
Using a Calculator <calculator></calculator>	269
Using World Clock <world clock=""></world>	269
Using Electronic Dictionary <electronic dictionary=""></electronic>	270
Calling with the Stereo Headset	271
Answering a Call Automatically with Stereo Headset	272
Using Bluetooth <bluetooth link=""></bluetooth>	272
Confirming Memory Usage <storage devices=""></storage>	276
Initializing Various Function Settings < Master Reset>	277
Deleting All Data Registered < Master Clear>	277

Multiaccess

Multiaccess is a function that allows to use 3 lines (voice call, packet communication and SMS) at the same time.

Voice call	1 line
Packet communication (i-mode, i-appli, i-mode mail, PC connections)	1 line
SMS	1 line

Note

- Combination of Multiaccess functions →P338
- During Multiaccess, communication charges apply for each of connected lines.
- During Video Call or 64K data communication, Multiaccess is disabled except for SMS reception.

Making Voice Calls during Packet Communication

Voice Call can be made during packet communication such as i-mode.

< Example: Making Voice Call during i-mode operation>

i-mode screen (P160) . [Function]

"SWAP" "New Call"

Phone number entry screen opens.

Enter a phone number $\Rightarrow (\bullet)$

Note

To return to i-mode screen, press 💷 [Swap] on the Voice Call screen (P52) and select "Active i-mode".

Receiving Voice Calls during Packet Communication

Voice Call can be received during packet communication such as i-mode.

< Example: Receiving Voice Call during i-mode operation>

There is an incoming call.

Incoming call screen opens.



- Note
- To return to i-mode screen, press [Swap] on the Voice Call screen (P52) and select "Active i-mode".

Using Other Communication during Voice Call

During a Voice call, you can perform operations such as sending/receiving mail or connecting to i-mode.

Sending Mail

- Voice Call screen (P52) Voice Call screen (P52) "Mail"
 "Compose message"/
 - "Compose SMS message"
- Create and send a mail

Note

Creating and sending mail →P184, P206

Receiving Mail

An icon to notify of incoming mail appears at the top of the screen (P32).



Connecting to i-mode

Voice Call screen (P52) Voice Call screen (P52) "i-mode"

Note

 To return to the Voice Call screen, select "SWAP" "Active Voice Call" on i-mode menu screen (P160) or press ____ [Function] on i-mode screen (P160) and select "SWAP" ▶ "Active Voice Call".

Multitask

Multitask

This FOMA handset provides Multitask function that allows to start and operate two functions concurrently. To use Multitask function, call up

Multiaccess

Applications screen from a current screen and select a function to be started.

- You can open the Task menu screen from the following screens:
 - Voice Call screen
- Video call screen
- i-mode screen
- Channel list screen - Mail Menu screen
- i-mode menu screen

Display Applications screen during each functions use

- Displaying from the Voice Call screen (P52) Press . [Swap].
- Displaying from the Video call screen (P81)/ i-mode screen (P160)/ Channel list screen (P223) Press I [Function] and select "SWAP".



Applications screen (Example: **Display from Mail** Menu screen)

Displaying from the i-mode menu screen (P160)/Mail Menu screen (P184) Select "SWAP".

Perform the following operations

 Items displayed vary depending on the active application or operation.

New Call

Opens the Phone number entry screen.

Active Voice Call*/Active Video Call

Open the Voice Call screen/Video call screen.

Phonebook

Open the Phonebook list screen.

Mail/Active Mail*

Open the Mail Menu screen.

i-Channel/Active i-Channel* Open the Channel list screen.

i-mode/Active i-mode* Open the i-mode menu screen/i-mode screen.

Datebook

Open the schedule calendar.

*: Already running applications.

Note

- Combination of Multitask functions →P339
- If you switch to an application that is not associated with an application screen, you can no longer switch to another application.

 "Active i-Channel" appears on the Applications screen when the Channel list screen is displayed, and "Running i-mode" appears on the Applications screen when connected to a site by selecting a channel item from the Channel list.

Terminating an Application

Close the active application screen and open the previous application screen.

While using an application \$ 30 / in [Exit]/ Image: [Return]

- · Open the screen of the application you want to terminate before terminating it.
- · Repeat for any other applications you want to terminate.

Alarm Clock

Emitting Alarm at Specified Time

FOMA handset can be used as an alarm clock. Up to 5 alarms can be registered.



screen

Perform the following operations

Name

Up to 24 full-pitch/half-pitch characters can be entered.

Enter a name

Time

Use to select "Hour", "Minute", or "Display Format" field > Use ()/Dial Keys to enter the time

Alert

Change alarm sound/vibration pattern emitted when alarm is activated

io doll'aloui	
i-motion :	Select from videos/i-motion movies saved in the "i-motion" folder. ♦ Select the folder ♦ ● ♦ Select a video/i-motion movie ♦ ●
Melody :	Select from melodies saved in the "Melodies" folder. ♦ Select a folder ♦ ● ♦ Select a melody ♦ ●
Voice Notes :	Select from voice notes saved in the "Voice Notes" folder.
Vibration Pattern :	Select from 5 types of vibration patterns. →P116 ♦ Select a vibration pattern ♦ [Select]
Volume	

Volume

Volume can be adjusted in 8 levels: 0 to 7.

Adjust volume with ()/Dial Keys A [OK]

[Complete]

Note Name

If nothing is entered, the set time is displayed on the Notification screen.

Alert

The following file formats can be set (depending on the file, some files such as restricted files containing a movie or voice may not be set): SMF, Mfi, MP4 (Mobile MP4), and AMR.

Function Menu on Alarm Clock Screen

Alarm Clock screen (P259) 🕨 📕 [Function] Perform the following operations

Enable · Disable

Enable/disable the selected alarm. When enabled, 1 appears on the alarm screen and the alarm sounds at the set time.

New

Go to Step 3 (P259) of "Emitting Alarm at Specified Time".

Edit

Edit the registered alarm. Go to Step 3 (P259) of "Emitting Alarm at Specified Time".

Delete

Delete a selected alarm.

Delete All

Delete all alarms.

Note

Enable/Disable

The screen when the alarm is enabled.

Edit

· An edited alarm will not be enabled automatically. To enable the alarm, press 4 [Function] on the Alarm Clock screen and select "Enable" to display ΰ.

When specified time comes

The Notification screen opens and the alarm tone sounds. If you changed "Alert" and "Volume", the handset acts in accord with the new settings.

- · The alarm may not start depending on the settings of "Profile", Manner Mode, etc.
- · If another alarm starts when an alarm is set with snooze, press []/[Snooze]/[]. [Disable] to start the alarm with snooze and a notification screen opens. Press [IN] to cancel the first alarm.
- · If a mail arrives at an alarm time, the mail ringtone takes precedence.
- · During a voice/video call, the Alarm Clock starts after the call is terminated

Operations available from notification screen

•/,

- : Stop Alarm and set Snooze.
- IDisable]
 - : Disable alarm and close notification screen.
- [Snooze]/Closing the FOMA handset : Set Snooze.
- · When no operations are performed in 3 minutes after the alarm has started, Snooze is set automatically.
- When Snooze is set, ^(C) at the top of the screen blinks. Alarm sound is emitted at approximately every 8 minutes after notification screen appears.
- To cancel snooze, on the Alarm Clock screen (P259) select the alarm with snooze, press [Function], and select "Disable".

When the set time comes while the FOMA handset is OFF

When "Power On Events" (P265) is "On", the FOMA handset is automatically turned ON and alarm sound is emitted, then notification screen appears. When turning the power OFF, press [Ignore]. To leave the power ON, press [Function], select "On" and I [Yes].

Alarm Clock

Managing Schedule/Task

Create New Event

Registering Schedule

You can save a schedule event such as a meeting or appointment. Set a Reminder to notify yourself of the Schedule event with an alarm tone and a notification screen before the scheduled time. Up to 500 schedule events (including pre-set holidays) can be saved.

● ▶ 🌇 (Accessories) 🕨 "Datebook"

Select the registered day ♦ ● ♦ "Create New Event"

Sub	jeo	:t:	
Loc	al	ion:	
Eve	nt	Type:	None
ALL	Da	ay Ever	nt: No
Sta	rt	Time:	7:00
End	T	ime: 1	8:00
Sta	rt	Date:	1 - NOV - OE

screen

Perform the following operations

Subject

Up to 128 full-pitch/half-pitch characters can be entered.

Enter a subject

Location

Enter information, if any, such as a location. Up to 64 fullpitch/half-pitch characters can be entered.

Enter a location

Event Type

Select a type of schedule such as private or holiday.

Select a type < _ [Select]</p>

All Day Event

Set whether to make schedule for a full day.

"Yes"/"No"

Start Time

Enter schedule start time.

♦ Use to select "Hour", "Minute", or "Display Format" field Use Dial Keys to enter the time

End Time

Enter schedule end time.

♦ Use ↔ to select "Hour", "Minute", or "Display Format" field ♦ Use ()/Dial Keys to enter the time

Start Date

Enter schedule start date.

- ♦ Use ↔ to select the "Day", "Month", or "Year" field
- Use ()/Dial Keys to enter the date

End Date

Enter schedule end date.

- ▶ Use ↔ to select the "Day", "Month", or "Year" field
- Use ()/Dial Keys to enter the date

Notes

Up to 128 full-pitch/half-pitch characters can be entered.

Enter a memo

Reminder

Set whether to sound the alarm tone before the set start time.

- Select Reminder activation time . [Select]
- When "Custom" is selected, enter time with ()/Dial Keys.
- When "Off" is selected, Reminder does not start.

Alarm

Change the alarm tone/vibration pattern of the Reminder.

i-motion	ir •	h th S	ect from videos/i-motion movies saved le "i-motion" folder. elect the folder $\blacktriangleright \odot \checkmark$ Select a video/ vition movie $\blacktriangleright \odot$
Melody	fc ♦	olde	elect a folder • • • Select a melody
Voice Notes	"\ •	Voi ∙ "∖	ect from Voice Notes saved in the ce Notes" folder. /oice Notes (All)"/"My Notes" • Select oice Note • •
Vibration Pat	tter	n	
			ect from 5 types of vibration patterns. 116
	٠	• S	elect a vibration pattern 🕨 📕 [Select]
Silent			Alarm will not sound/vibrate at the set ninder time.
None	: Ir	n a	ccord with the "Profile".
Repeat			
None		:	Set to start schedule only once with no repetition.
Daily		:	Repeat Schedule everyday.
Weekly		:	Repeat Schedule on the same day of every week.
Monthly on o	lay	:	Repeat Schedule on the same day of same week every month.
Monthly on o	late	:	Repeat Schedule on the same day of every month.
Yearly on Da	y	:	Repeat Schedule on the same day of same week every year.
Yearly on Da	te	:	Repeat Schedule on the same day of every year.

Secret

Set to hide data as secret and with "Secret Data" set to "Hide".

"Yes"/"No"

🔄 🖅 [Complete]

Datebook

Note

- Schedule with repetition set are counted as 1 item.
- If a Schedule event with the same date and time has already been saved, performing Step 4 opens a registering confirmation screen. Select .
 [Edit] to change, or .
 [Yes] to save it unchanged.
- If a call arrives while saving, the data being registered will not be saved if:
 - The call is answered
 - The call is placed on response hold
 - Record Message started

Alert

 The following file formats can be set (but some files such as restricted files or files including only movies or sounds may not be set): SMF, MFi, MP4 (Mobile MP4), and AMR

Secret

 If "Secret Data" is set to "Hide", the field of "Secret" does not appear.

Create New Task

Registering Task

You can save a task to perform, etc. Set a Reminder to notify yourself of the task with an alarm tone and a notification screen before the due date. Up to 400 tasks can be registered.

● ▶ 🌆 (Accessories) ♦ "Datebook"

Select the day to register ♦ ● ♦ "Create New Task"

Greate Task
Task:
Status: <u>Schedule</u>
Type: None
Priority: <u>Normal</u>
Start Date: 1-NOV-06
Due Date: <u>1 - NOV - O6</u>
Completed Date:
Create Task
oreate ruok

screen



Task

Enter a Task name. Up to 128 full-pitch/half-pitch characters can be entered.

Enter a name

Status

Select an item status from "Schedule", "Complete", "Accepted", "Requested", "Tentative", "Confirmed", "Declined" or "Delegated".

```
Select a status . [Select]
```

Туре

Select a type of item such as business or conference.

```
Select a type - [Select]
```

Priority

Select an item priority from "High", "Normal" or "Low".

Select a priority . [Select]

Start Date

Enter an item start date.

- ♦ Use to select the "Day", "Month", or "Year" field
- Use ()/Dial Keys to enter the date

Due Date

Enter an item deadline.

- ▶ Use 😔 to select the "Day", "Month", or "Year" field
- Use ()/Dial Keys to enter the date

Completed Date

Enter an item end date.

- Use ()/Dial Keys to enter the date

Notes

- Up to 128 full-pitch/half-pitch characters can be entered.
- Enter a memo

Reminder

Set whether to sound an alarm tone on the due day.

```
"On"/"Off"
```

Reminder Time

Set what time Reminder is activated on the due day.

• Use \bigcirc to select "Hour", "Minute", or "Display Format" field • Use \bigcirc /Dial Keys to enter the time

Alarm

Change the	alarm tone/vibration pattern of the Reminder.
i-motion	 : Select from videos/i-motion movies saved in the "i-motion" folder. ♦ Select the folder ● ● ● Select a video/ i-motion movie ● ●
Melody	 : Select from melodies saved in the "Melody" folder. ◆ Select a folder ◆ ● ◆ Select a melody
	 ✓ Select a folder ✓ ✓ ✓ Select a filled
Voice Note	s : Select from Voice Notes saved in the "Voice Notes" folder.
	"Voice Notes (All)"/"My Notes" Select a Voice Note •
Vibration P	attern
	: Select from 5 types of vibration patterns. →P116
	Select a vibration pattern
Silent	: The Alarm will not sound/vibrate at the set Reminder time.
None	: In accord with the settings in "Profile".

Set to hide data set as Secret and with "Secret Data" se "Hide".

Yes"/"No"

🚺 🖅 [Complete]

Note

- · If a call arrives while saving, the data being registered will not be saved if:
 - The call is answered
 - The call is placed on answer hold
 - Record Message started

Status

· If the task is set to "Complete", the Reminder does not work even if "Reminder" is set to "On".

Priority

When "High" is selected, 4 appears and when "Low" is selected, I appears on the Day View screen. However, this is not displayed when "Status" is set to "Complete".

Alert

The following file formats can be set (but some files such as restricted files or files including only movies or sounds may not be set): SMF. MFi. MP4 (Mobile MP4), and AMR

Secret

 When "Secret Data" is set to "Hide", the field of "Secret" does not appear.

When the set date/time comes

The Notification screen opens and the alarm tone sounds once. If you changed "Alert", the handset acts in accord with the new settings.

- If you keep the Notification screen open, the alarm tone sounds once every 5 minutes. After the set time in "Reminder Time-Out" (P265) elapses, the screen closes automatically.
- The alarm may not start depending on the settings of "Profile", Manner Mode, etc.
- · During a voice/video call or data exchange connected to a PC. the Schedule alarm does not sound.

Operations from notification screen

- •/• : Stop the Schedule alarm.
- 💽 [Exit]

: Close notification screen.

[View]

: Open detail screen.

• While the FOMA handset is closed, press |• | to display detail information. Press 1/, to scroll the scroon

When the set the Reminder date/time comes. with power OFF

When "Power On Events" (P265) is set to "On", automatically the handset is powered on, the Notification screen opens, and the alarm tone sounds


• To turn the power OFF, press [Ignore], to display detail screen, press [J] [View]. To turn the power OFF from a notification screen, press Ignore]. To leave the power ON, press [Function], select "On" and press] [Yes].

· Selecting "More" from the Function menu on the detail screen scrolls the screen. Selecting "Copy All Text" copies the text on the screen.

Checking Schedule/Task

The confirmation for Schedule or Task. or register schedule or items. Calendar appears on a Month View or Week View screen.

- · Calendar is displayed on Month View screen by default
- Calendar can be displayed from January 2, 2006 to December 31, 2030.



- *: / *: Switch to the previous/next month or week.
- · On the monthly view, the day of the week of the current day and the current date are highlighted. On the weekly view, the column of the current day and the time slot that has an event scheduled are highlighted (the highlight colors vary depending on the setting of "Skin").
- · On the monthly view, for the day when an event is scheduled, // is displayed at the lower right corner of the cell.
- · On the weekly view, for the day when an event is scheduled, () is displayed below the day of the week.

Select the day to open **b**

• * / #: Switch to the previous/next day.



Day View screen

Icons on the Day View screen

lcon	Description
Q	Schedule event/Task with Reminder activated
\odot	All day event
0	Task with "High" Priority
Ŷ	Task with "Low" Priority
1	Task with "Status" set to "Complete"

Datebook

Continued on the next page ••• 263

$\mathbf{2}$ Select the Schedule/Task to open $ig \odot$

Task Detail

Presentation

Status: Complete

Type: Rusiness

Priority: High Start: 25-001-06

Due Date: 3-NOV-06

Task Detail

screen

Event Detail Cinema Location: O×theater Event Type: Appointment Start: 19:00, 3 -NUV - 06 End: 21:00, 3 -NUV - 06

Schedule Detail screen

Note

- · Holidays appear in red.
- National Holidays are based on "国民の祝日に関する 法律及び老人福祉の一部を改正する法律(平成13年 法律第59号) (law related to national holidays and old-age persons' welfare law amended (Law No. 59, 2001))". Spring Equinox Day and Autumnal Equinox Day are released in an official gazette on February 1 and may not be exact (as of November, 2006).
- The monthly view/weekly view does not have an icon indicating whether there is a saved task.
- If you set "Auto Update" under "Time and Date" to "ON (Time and time zone)", when the time is updated, the set times for saved schedule events or tasks are automatically adjusted.

Day View screen

 If Schedule events and tasks are set for the same date, Schedule events (in ascending order of starting time) then tasks (in ascending order of Shift JIS of the entered name in the "Task") are displayed.

Notice

- It is recommended that you take notes of the contents stored in the Schedule/Task. If you have a personal computer, you can save them also to the personal computer by using the Data Link Software and the FOMA USB Cable (optional).
- Note that a service counter such as DoCoMo shop may not be able to copy data from your existing FOMA handset to the new one, depending on the specifications.
- Be advised that DoCoMo is not responsible for the loss of data stored in your FOMA handset due to a malfunction, repair, or other mishandling of the FOMA handset.

Function Menu on Month View/Week View/ Day View/Detail Screen

Week View/Month View

Switch Calendar to Week/Month View.

Create New Event

Go to Step 3 (P261) of "Registering Schedule".

Create New Task

Go to Step 3 (P262) of "Registering Task".

Go to Today

Move the cursor to the current day. Or, open the screen of the current day.

Edit

Modify the selected/displayed Schedule/Task. Go to Step 3 (P261) of "Registering Schedule"/Step 3 (P262) of "Registering Task".

Delete

Delete the selected/displayed Schedule/Task.

Сору

Copy the selected/displayed Schedule/Task.

- ★ [Yes] ★ Use ↔ to select the "Day", "Month", or "Year" field ★ Use ∯/Dial Keys to enter the date
- Hereafter, go to Step 3 (P261) of "Registering Schedule"/ Step 3 (P262) of "Registering Task".

Print

Print Schedule/Task with a printer compatible with Bluetooth. \rightarrow P275

Send

- Infrared : Send the currently selected Datebook event/ task via infrared. →P254
- Bluetooth : Send the currently selected Datebook event/ task via Bluetooth. →P273

Store

Register Schedule/Task received via Bluetooth/Infrared to Calendar.

Copy All Text

Copy all character information on detail screen.

Setup

Set details of Schedule. →P265

Note

Delete

 For Schedule with repetition set, a screen for selecting deletion type opens. Select "This Event Only" to delete only a selected schedule. Select "Repeating Event" to delete all repeating schedules selected.

Setting Details of Schedule

Default	Default View: Month View Daily Begin: 7:00 Reminder Time-Out: Off Delete Past Items: 2 weeks Power On Events: Off
	Power On Events: Off

You can set Schedule in details such as Calendar display, start time of display on new registration screen, Reminder display time, etc.

Month View screen (P263)/Week View screen (P263)/Day View screen (P263)/ Detail screen (P263) 🕨 🖅 [Function] 🕨 "Setup"

Perform the following operations

Default View

Switch the Calendar to the Month View/Week View screen.

"Month View"/"Week View"

Daily Begin

Set start time to display Calendar on new registration screen in advance.

Use to select "Hour", "Minute", or "Display Format[®] field **b** Use ()/Dial Keys to enter the time

Reminder Time-Out

Set the display time for the notification screen displayed after the Reminder is activated.

- Select display time
- · If this is set to "Off", the Notification screen remains open until you close the screen.

Delete Past Items

Set to delete registration contents automatically when certain period of time passed from the set date/time or deadline.

Select a period

· The contents are not automatically deleted when this is "Never".

Power On Events

Set whether to turn the power ON automatically and display a notification screen when the set date/time comes while the power is OFF.

"On"/"Off"

My Personal Info

Registering Your Name and/ or Image

You can store your personal information on the FOMA handset. Contents that can be stored are the name, reading, nick name, phone number (up to 6 phone numbers) and type, mail address (up to 3 mail addresses) and type, URL (up to 2

URLs), address (up to 2 addresses) and type, images, date of birth and memos.

🦹 (Settings) 🕨 "Phone Status" 🕨 "My Personal Info"



My Personal Info screen

Enter the Security Code

My	Personal	Info
Mobile	Phone 1:	
E 0903	XXXXXXXX	
Mv F	Persona	al Info
	tail scr	
ae	tan SCI	een

[Function] ♦ "Edit Contact"

Register information ♦ 💷 [Complete]

· For registration operation, see Step 2 "Saving in the FOMA Handset (Phone) Contacts" (P93).

Note

· If you change an Email address in i-mode, the address saved to this function will not be updated automatically.

• Open the My Personal Info screen, press [Function], and select "Copy" to copy all text on the My Personal Info screen.

Operations from My Personal Info detail screen When a registered phone number, mail address or

URL is selected and (•) is pressed, you can perform various operations by selecting from the following items.

Send SMS

- : Make Voice Call to the selected phone number.
- Video Call : Make Video Call to the selected phone number.

: Create and send SMS with the phone number of the currently selected phone number as an address. →P206

Send Message : Compose i-mode mail to send to the selected phone number/ mail address set as a destination mail address. →P184

Connect

: Connect to the site of the selected URL.

Add to Bookmarks : Register the selected URL to a bookmark.

- Selecting a registered phone number and pressing ⓐ // ﷺ also opens the phone number entry screen with the phone number entered.
- Selecting a mail address and pressing $\fbox{0}$ also creates and sends mail.
- Selecting a URL and pressing
 also connects to a site.

Function Menu on My Personal Info Detail Screen

My Personal Info detail screen (P265) Mathematical Info detail Info d

Send Message

- Mail : Create and send i-mode mail with the currently selected number/mail address entered in the Receiver. →P184
- SMS : Create and send SMS with the currently selected phone number entered in the Receiver. →P206

Caller ID

Make a call setting send/hide Caller ID. →P56

Multi Number

Make a call selecting a dial number. →P287

Browse URL

Connect to the currently selected URL.

Edit Contact

Edit the registered personal data. Go to Step 4 (P265) of "Registering Your Name and/or Image".

Insert in Message

- Mail : Create and send i-mode mail with the currently selected number/Email address entered in the message text. →P184
- SMS : Create and send SMS with the name and the currently selected phone number/Email address entered in the message text. →P206

Send Contact

- Infrared : Send personal information via infrared. \rightarrow P254
- Bluetooth : Send personal information via Bluetooth. →P273

Delete Number/Delete Email/Delete URL/Delete Postal Address

Delete the currently selected phone number/Email address/URL/Postal address.

Edit Before Call

Open the Phone number entry screen with a selected phone number entered. ${\rightarrow} \text{P52}$

Secret Code

Save the secret code. →P181

Enter the Unlock Code Enter the secret code
[Save]

Reset

Delete all registered information of personal data.

♦ 🖅 [Yes]

Send Tones

Send a saved phone number being selected with push signal (DTMF).

Note

Secret Code

 If you select a phone number or mail address saved with secret code and display the function menu, "★" appears next to the item name of the "Secret code".

Send Tones

 This option is available only when you select saved phone number before pressing (Function) and then, select "My Personal Info" during a call.

Checking Call Duration/Cost

You can confirm the last and accumulated call duration and charge for voice calls, video calls and the like.

- Call costs are stored in UIM. When a different UIM is used, the stored call costs appear (storing started in December 2004).
- * FOMA handset released before 901i Series cannot display call costs stored in UIM (though stored in UIM).
- Displayed call duration and call cost can be reset.
- Call duration and cost displayed are approximate values and may be different from actual ones. Note that call cost does not include consumption tax.

Note

 The duration/charge for i-mode transmission and packet transmission is not counted. For how to check i-mode bill, refer to "Mobile Phone User's Guide [i-mode] " which is supplied on your i-mode contract.

Call Times

Checking Call Duration

You can check the duration of the previous or total duration of all voice or video calls.

 The displayed call duration shows the approximate duration of the call including the voice call duration and digital communication duration (video call plus 64K data communications). The duration for both incoming and outgoing calls is shown.

(●) ♦ The content of the content Calls" Call Times" Perform the following operations

Last Call

Display duration of the previous call.

Dialed Calls

Display total duration of outgoing calls.

Received Calls

Display total duration of incoming calls.

All Calls

Display the sum of the call durations of "Dialed Calls" and "Received Calls" from the last reset to now.

Lifetime

Display the total call time from the default.

Note

- After "Last Call" and "Lifetime" exceeds 99 hours 59 minutes 59 seconds, they reset to 0 (zero) seconds and start counting again.
- · The duration for ringing and calling is not counted as call duration.
- Call time does not include time for i-mode and packet communications.
- Resetting "Dialed Calls", "Received Calls" or "All Calls"

Select each item, press 上 [Select], 上 [Reset] and I [Yes].

· "Reset" does not appear when call duration is "0".

Call Cost

Checking Call Cost

Call cost includes both incoming and outgoing calls.

(●) ♦ The content of the content Calls" ▶"Call Cost" ▶ Perform the following operations

Credit Available

Display the difference between the cost set for "Credit Limit" and "All Costs" if the limit is set in "Credit Limit".

Last Call

Display cost of the previous call.

Dialed Calls Display total cost of outgoing calls.

Received Calls

Display total cost of incoming calls.

All Calls

Display the total call cost from the time when "Reset All Costs" is performed till now.

Note

Selecting "Call Cost Setup" by pressing [Function] on the Call cost screen displayed when selecting "Call Cost" opens the Call cost setup screen (P267).


Resetting "Dialed Calls", "Received Calls" or "All Calls"

Select each item, press 4 [Select] and 4 [Reset] and enter the UIM PIN2.

"Reset" does not appear when call cost is "0".

Resetting All Costs

● 🛉 🙀 (Settings) 🕨 "In-Call Setup" 🕨 "Call Cost Setup"



Credit Limit

Setting Credit Limit

Default Off

Save the value to be the maximum of accumulated call charges to prevent further expenditure.

👬 (Settings) 🕈 "In-Call Setup" 🕨 "Call Cost Setup" "Credit Limit" Enter the UIM PIN2

Credit Limit	
0.00 YEN	Î
✔ Off	
Credit Limit	
Credit Linnit	

screen

267

"0.00 YEN" Enter the value of the credit limit

- Enter a call cost in the range of 1 to 9999999.00.
- · If you select "Off", the Credit limit is canceled.

Note

- · You can set a unit in "Currency Setup".
- · The effective maximum value of the Credit limit will be changed by changing the "Per Unit" in "Currency Setup".
- If "0.99" or smaller number is entered, the value is set to "0.00", and the Credit limit becomes null in the same way as "Off". On the Wallpaper screen, "0.00 (unit)" is displayed, however, calls can be made.
- The following operations are available by pressing [Function] on the Value entry screen:
 - Select "Editing Function" "Delete" to delete the entered values.
 - Select "Cancel Entry" to cancel saving.

After setting the Credit Limit

At the location that the date is displayed on the Wallpaper screen, the value that is a difference subtracting All Calls cost from the set Credit Limit is displayed. On the Voice Call screen, the remaining value is counted continuously. When the value comes near the limit, you will be notified with a warning message and an audible alert.

- · The remaining value also appears after terminating a voice/video call.
- · During a video call, the remaining value is counted continuously, however, it is not displayed on the Video call screen.

If the limit is exceeded

When you attempt to make a call, a message indicating that the call cannot be connected because the Credit Limit has been exceeded appears and you cannot make the call.

 If the limit is exceeded during a call, the call can be continued so that the set Credit Limit may be exceeded.

Checking the remaining call cost

Check the remaining call cost to the maximum call cost set in "Credit Limit".

· Checking is available only when a "Credit Limit" is specified.


If the second "Credit Available"

Currency Setup

Setting Unit of Credit Limit

Default Currency: YEN Per Unit: 1.000

You can store the unit of the value entered in the "Maximum Call Cost" and a cost for each unit.





screen

"Currency" "YEN"

The Currency type screen opens.

· If you select "Off", the currency is not displayed. Go to Step 6.

Enter the unit

 Up to 3 half-pitch characters (alphanumeric characters or symbols) can be entered.

"Per Unit" Δ

A screen of cost for each currency opens.

- Enter the unit value of the changed currency
 - Enter from 0.001 to 9990000000.000. For example, enter 0.01 for US Dollar (US1 = 100).

IComplete h

Note


- · The following operations are available by pressing [H] [Function] on the screen of cost for each currency:
 - entered value.
 - Select "Cancel Entry" to cancel saving.

Currency

When this is set to "Off", the unit is displayed as "Unit".

Using a Calculator

You can use Calculator function to perform arithmetic operations, memory calculations, percentage calculations and other operations.



Note

 When the calculation result contains more than 8 digits such as "123456780000000", it is indicated as an exponential value like "1.2345678e+14".

1 ·0% ·0% ·0 1 · ·0% ··5° •

Function Menu on Calculator Screen

Calculator screen (P269) ♦ [Function] ♦ Perform the following operations

+/-

Switch sign (+/-) of an entered number.

MS

Save an entered number/calculation result in memory.

MC

Delete the value saved in memory.

MR

Call up the value saved in memory.

%

Perform percentage operation on an entered number/ calculation result.

Convert Currency

Convert an entered number using the exchange rate set in "Currency Setup".

Currency Setup Set the Convert Currency. →P269



MS

- Image appears when the value is saved in memory.
- The value saved in memory is retained after the power is turned off.

Setting Currency Conversion Default FROM: Dollar \$ TO: Yen ¥ Exchange Rate: 110

You can specify currency to be converted and set an exchange rate.

Calculator screen (P269) [Function] Perform the following operations

From

Select currency type applied to an entered number.

Select currency type to be converted from [Select]

То

Select currency type applied to a converted number.

Select currency type to be converted to [Select]

Exchange Rate

Open Exchange Rate screen and set an exchange rate.

Enter an exchange rate

Convert Currency

When a numeric value has been entered, convert it with the set exchange rate.

Note

Calculato

- The following operations can be performed by pressing <u>b</u> [Function] on the Exchange rate screen:

 - Select "Cancel Entry" to cancel the entry.

World Clock

Using World Clock

Default Tokyo, London, and New York (from the top)

You can check the current date and time of 3 cities using the World Clock. Set 3 cities to your current location, next destination and Japan so that you can easily check the time difference.



- 🖌 : The city is set as "Time Zone" for "Time and Date".
- When the displayed city is at night (5:30 pm to 5:29 am), the clock becomes gray.

World Clock		
Ó	Tokyo 1 - NOV - O6	
\bigcirc	London 1 - NOV - 06	
\bigcirc	New York 31–OCT–O6	
Wo	rld Clock	
	screen	

Note

 When "Auto Update" (P49) in "Time and Date" is set to "On (Time and time zone)", after using the FOMA handset at an overseas location, the city with ✓ attached is displayed as the current city automatically.

Function Menu on World Clock Screen

World Clock screen (P270) ♦ [Function] ♦ Perform the following operations

Change City

Delete a selected city. →P270

View Details

Display the detail screen of the city and time zone for the selected city to view date/time and time zone.

Time and Date

Set the date and time of the city marked with \checkmark . Go to Step 2 (P48) of "Setting Time and Date".

Digital Clock/Analog Clock

Switch the clock on the World Clock screen to digital/ analog clocks.

Map View/Clock View

Switch the World Clock display to the Clock View/the Map View.

Note

Map View

- Use (1) to select a city. You can move the cursor to see a different time zone on the map.
- A gray shaded clock indicates night time.

Changing the City

Select a city and time zone [Select]

Note

- A time zone is one of the world standard regional time bands. Standard time is expressed as the difference between the current time zone and Greenwich mean time (GMT). Standard time in Japan is expressed as "GMT+9: 0" because it is 9 hours earlier than GMT. →P49
- Select a city without ✓ attached, press ●, and press ▲ [Yes] to change "Time Zone" in "Time and Date" to the selected city and time zone. However, when "Auto Update" in "Time and Date" is set to "On (Time and time zone)" or "On (Time only)", press to display a confirmation screen whether to set "Auto Update" to "Off". To change the setting, press ▲ [Yes] and select "Off", then start over again.

Electronic Dictionary

Using Electronic Dictionary

You can use English-Japanese dictionary, Japanese-English dictionary and Japanese language dictionary installed in the FOMA handset.

● ◆ 🏠 (Accessories) ◆ "Electronic Dictionary"

Electronic Dictionary English-Japanese Japanese-English Japanese-Language Recent Entries Electronic

Dictionary screen

"English-Japanese"/"Japanese-English"/"Japanese-Language" Enter a word to be looked up

- Enter full-pitch/half-pitch alphanumeric characters to the English-Japanese dictionary, and kanji, hiragana, and full-pitch/half-pitch katakana to the Japanese-English or Japanese-Language dictionary.
- Up to 50 full-pitch/half-pitch characters can be entered.
- After confirming the entered characters, go to Step 3. If you press (A) [Function] without confirming the characters, the Function menu of the Character entry screen opens.
- To correct confirmed characters Press (a) [Function] and "Edit" to correct characters.

Electronic Dictionary

IFunction] ♦ "Search"

	English-Japanese
	fish-eye lens
	fish farm
	fishing
	fishmonger
	fishnet
	[名]①魚つり,魚とり;漁業
	Search Result
	screen
Select the target lemma	► [Select]
	English-Japanese fishing

포

Detail screen

[名]①魚つり,魚とり;漁

Note

- - Select "More" to move to the next page if the detail screen has more than 1 page.
 - Select "Return to Menu" to return the Electronic dictionary screen.
 - Select "Copy All Text" to copy all text data on the detail screen.

Using Recent Entries

8 items looked up in electronic dictionaries are recorded in history, allowing to reconfirm meanings of words later.

- When more than 8 items have been looked up, they are deleted sequentially from the oldest ones.
 - Electronic Dictionary screen (P270) "Recent Entries"



Icons on the Recent Entries Screen

lcon	Description
E+J	Recent entries in English-Japanese dictionary
J•E	Recent entries in Japanese-English dictionary
JP	Recent entries in Japanese-Language dictionary

Note

- The following operations can be performed by pressing + [Function] on the Search log screen:
 - Select "Search" to find a word in a log again.
 - Select "Delete" and press 🖌 [Yes] to delete the selected log entry.
 - Select "Delete All" and press 👍 [Yes] to delete all log entries.

Calling with the Stereo Headset

You can connect miniUSB Stereo Headset M01 (optional) to FOMA handset to make and receive calls.

Making a Call Using Switch

You can redial the last phone number recorded in Dialed Calls by pressing the switch of the miniUSB Stereo Headset M01.

- Press the miniUSB Stereo Headset switch 3 times
- Press the switch of the miniUSB Stereo Headset (for 1+ seconds) to terminate the call
 - You can also terminate the call by pressing (.

Receiving a Call Using Switch

A call arrives Press the switch of miniUSB stereo headset Answer the call.

- When a video call arrives, the camera image is sent to the other party.
- You can also answer a voice call by pressing ♥//♥/.
 Inswer] or a video call by pressing ♥//♥.

Press the switch of miniUSB stereo headset (for 1+ seconds) to terminate the call

Receiving Another Incoming Call during a Call

If Call Waiting service is subscribed and is activated when another voice call arrives during a voice call, you can answer the second call by pressing the switch of the miniUSB Stereo Headset M01.

A call arrives Press the switch of miniUSB Stereo Headset

The active voice call is placed on hold and you can answer the incoming call.

- You can also answer a voice call by pressing
 /ie [Answer] or a video call by pressing
- [Switch]: Switch between callers.

Press the switch of miniUSB Stereo Headset (optional) (for 1+ seconds) to terminate the call

Note

 However, when using the miniUSB Stereo Headset M01, a call will not be terminated when the handset is closed during the call.

Auto Answer

Answering a Call Automatically with Stereo Headset

Default Off

You can set so that an incoming call is answered automatically, if a miniUSB Stereo Headset M01 is connected, after a set ringing time has elapsed.

(Settings) ▶ "Headset" ▶ "Auto Answer" ▶ Select ringing time ▶ d. [Select]

· Select "Off" to cancel Auto Answer.

Note

 If the Auto Answer ringing time is set to the same or shorter duration as in the Voicemail or Call Forwarding service, or in Record Message, this option takes precedence.

Bluetooth Link

Using Bluetooth

You can connect Bluetooth compatible PC, headset and/or handsfree compatible devices to FOMA handset and perform data communications, handsfree talking and other operations.

• Also read the instruction manual of the Bluetooth device you use.

Terms related to Bluetooth

Passkey

Password containing 1 to 16 digits set for individual Bluetooth devices to prevent unauthorized connections to such devices from other persons.

Pairing

Procedure to be executed when devices are connected for the first time via Bluetooth. To make paring, the entry of the passkey set in the other party's device is required.

Profile

Communication protocol predetermined depending on the devices connected by Bluetooth and types of data to be sent/received.

Search

Searching for other Bluetooth compatible devices placed in communicable range.

Functions Available with Bluetooth

Handsfree call

You can talk over a call without holding FOMA handset with your hands by connecting Bluetooth compatible headset and/or handsfree compatible devices. \rightarrow P62


Play Audio

You can play with high-quality stereo sound by connecting Bluetooth compatible stereo headset, etc.

- Sending/receiving Phonebook/Schedule/Task You can exchange Phonebook and Schedule/ Task to/from Bluetooth compatible devices.
- Sending/receiving image/video/music files You can exchange files saved in FOMA handset with Bluetooth compatible devices.
- Sending/Receiving received, sent and Unsent mails

You can exchange a mail or all mails saved in Inbox, Outbox and Unsentbox to/from Bluetooth compatible devices.

Sending/Receiving bookmarks You can exchange and send bookmarks registered in FOMA handset with Bluetooth compatible devices.

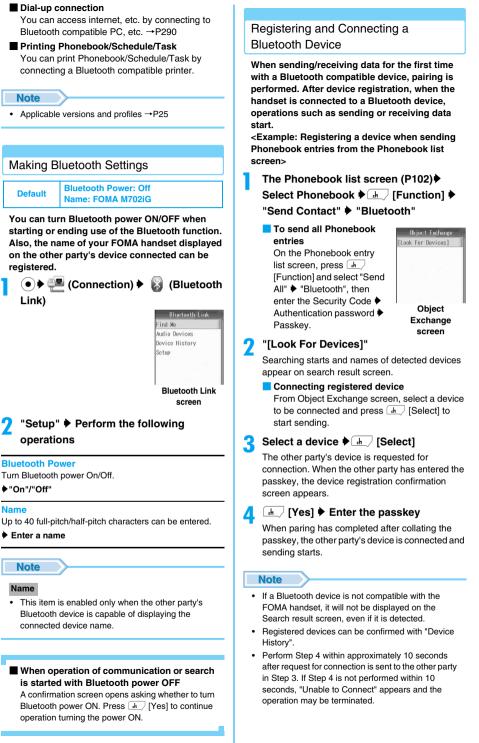

Bluetooth Link

Continued on the next page •••

- Performing Step 1 after selecting a Schedule event with repetition set, a screen to specify the sending method appears. Select "Single Occurrence" to send only the selected Schedule event, or select "All Occurrence" to send all Schedule events with repetition set.
- When SMS saved in the Outbox or Unsentbox is sent, the destination information will not be sent.
- Depending on the device to be connected, the passkey may not be required.

Registering and Connecting an Audio Devices

When connecting Bluetooth compatible headset or handsfree compatible device for the first time, paring is performed.

 Make the device ready to connect in advance. For details, read the instruction manual for respective Bluetooth device.

Bluetooth Link screen (P273) "Audio Devices"



"[Look For Devices]"

Searching starts and names of detected devices appear on search result screen.

Connecting registered device

Select a device to be connected from Audio Devices screen and press \boxed{h} [Select] to connect to other party's device. When passkey is required, go to Step 4.

Select a device 🕨 🖅 [Select]

The device registration confirmation screen opens.

 When a device requiring no passkey is detected, registration completes.

🚹 🖅 [Yes] 🕨 Enter the passkey

When paring has completed after collating the passkey, the other party's device is connected.

Receiving Data from Another Device

When receiving data from another Bluetooth device, Bluetooth function of FOMA handset must be set to stand-by mode in advance.

 When "Receive All" of data is performed, data saved in FOMA handset of the same type as the received data is overwritten.

<Example: Receiving one piece of data>

Bluetooth Link screen (P273) ♦ "Find Me"

Stand-by time appears and
blinks at the top of the screen.

· Receive data within the searchable time.

Data is sent from the other party's device

A screen opens notifying reception of a connection request.

When there is a connection request from a device not registered

When the passkey is entered from the other party's device, paring confirmation screen opens on FOMA handset.

When you press (h) [Yes] and enter the passkey, screen notifying reception of connection request appears.

3 Ⅰ [Grant]

Data is received.

• 🚯 lights while receiving data and it starts blinking when reception has completed.

When receiving all data

Press → [Grant] and enter the Security Code → Authentication Password → Passkey in order, then press → [Accept] → → [Yes].

Note

- When SMS saved in the Outbox or Unsentbox is sent, the destination information will not be sent.
- Depending on a device to be connected, the passkey may not be required. Also, the operation required for receiving may differ.
- If you failed receiving data, end operations and try again from the Wallpaper screen.

When data reception of 1 item has completed Phonebook

Preview screen opens.

 Press h [Store] to open the store contact screen, and press is [Complete] to save to the Phonebook.

Schedule/Task

- Schedule Detail screen/Task Detail screen opens.
- Press 上 [Function] and select "Save" to save data in Schedule.
- Press 上 [Function] and select "Copy All" to copy all character information on detail screen.

- The status is "Complete" and the Due Date is past.
- The status is "Complete" and the Completed Date is not entered.

Other

The Display/playback screen opens.

- When an image is received, press on the Display screen to save it in the Databox.
- When a video/i-motion movie or melody is received, press .
 [Function] on the Playback screen and select "Save". A message "Quit Melody player?" appears. Press .
 [Yes] to save a file in the Databox.
- Depending on the device to be connected, the Display/playback screen may not open, and the received data may be saved in its respective location automatically.

Printing with Bluetooth Compatible Printer

Using Bluetooth compatible printer, you can print registered contents of phonebook/ Schedule/Task in wireless mode.

<Example: Printing 1 phonebook from the Phonebook list screen>

The Phonebook list screen (P103) ♦ Select phonebook ♦ ↔ [Function] ♦

"Print"



Print Options screen

P "Template" ► Select a style ► [View]

Display print preview of a selected style.

• 😔: Switch between size and print preview.

Iselect]

Return to print Options screen.

[Print]"

Printer screen opens.

"[Look for Devices]"

Searching starts and names of detected devices appear on search result screen.

Connecting registered device

Select a device . [Select]



• On the Print Options screen, in the "Paper Size" field, the paper size set under "Template" is displayed and cannot be changed.

Managing Registered Devices

You can confirm registered devices, change device names, change connection types and delete all registered devices.

Bluetooth Link screen (P273) ♦ "Device History"

Bluetooth device screen opens showing registered devices.

- Jet Switch to display of device types. Each pressing changes the type.
- Deleting registered device Select a registered device, press . [Function] and select "Delete".
- Select a registered device •



Perform the following operations

Name

Modify name of a registered device. Up to 20 full-pitch/ half-pitch characters can be entered.

Enter a name

Access

Set a reaction to a connection request from the device registered.

Always Ask	:	Check whether to receive data for each connection.
Automatic	:	Always allow connection.
Never	:	Reject connection.
Just Once	:	Allow only the first connection checking receive data and automatically set the used service to "Reject" thereafter.
Custom	:	Operate in the same way as when "Access Settings" is selected.

Access Settings

Select a reaction for each service to a connection request from "Always Ask", "Automatic", "Never" or "Just Once".

Handsfree Voice Gateway

:	Set a reaction for headset/ handsfree service. ♦ Select an item ♦ Select a reaction ♦ (h) [Select].
OBEX Object Push :	Set a reaction for Object Push/ Basic Imaging Service. For operations, see "Handsfree".
OBEX File Transfer :	Set a reaction for File Transfer Service. For operations, see "Handsfree".

Dial up Networking Gateway

:	Set a reaction for Dial-up
	Networking Service. For
	operations, see "Handsfree

Audio Source : Set a reaction for Audio Service. For operations, see "Handsfree".

Audio Video Remote Control Target

: Set a reaction for Audio/Video Control service. For operations, see "Handsfree".

[Complete]

Note

• The device type is displayed under "Type" on the Device detail screen. You cannot edit the type.

Storage Devices

Confirming Memory Usage

You can confirm occupied and empty capacities of FOMA handset memory. If a microSD memory card is inserted, you can also check the usage of the microSD memory card.

- The space used in the FOMA handset includes the files/data for the following functions:
 - Mail Message R/F
 - Phonebook*2
 - Alarm Clock^{*2}

i-appli

- Record Message
- Downloaded Dictionaries
- Deco-mail templates
- Data in Databox*1 (Images, videos/i-motion movies, melodies, Chara-den, animations and Voice Notes)

- Datebook*2

- *1: The pre-installed files/data are not included.
- *2: Because there is some exclusive secure memory space, files/data may be saved even if the available space appears to be full.

● ♦ 🙀 (Settings) ♦ "Phone Status" ♦ "Storage Devices"



Phone"/"microSD"

Detail screen opens.

Note

- On detail screen, press (Function) and select "Copy All" to copy all character information in detail screen.
- When the available memory space on the FOMA handset becomes very small, or the maximum number of files or data has been saved, read (red) appears at the top of the screen and no more files or data can be saved. In this case, it is recommended that files or data be saved on a microSD memory card or unnecessary files or data be deleted.

Function Menu on Storage Devices Screen

- The Function menu is available only when "microSD" is selected.
- Storage Devices screen (P276) ♦ → [Function] ♦ Perform the following operations

Rename

When a microSD memory card is inserted, save the name that follows "microSD". Up to 11 half-pitch alphanumeric characters or symbols can be entered.

Enter a name

Format

Delete all data stored on the microSD memory card, and also delete the name registered under "Rename".

- ♦ H [Yes] ♦ H [Yes]/ in [No]

Initializing Various Function Settings

You can initialize the settings of various functions to the default settings.

- For functions initialized to the default settings, see "Menu List" (P318).
 - 🗩 📲 (Settings) 🕈 "General Settings"
 "Master Reset"
 Enter the

Security Code . [Yes]

Upon completion of Master Reset, the FOMA handset is restarted.

Note

- · When Self Mode is set to "On", this option cannot be performed.
- The following functions also restore to their defaults in addition to the functions listed on the menu list:
 - i-Channel - Video Call
 - Earpiece Volume
 - Original Manner Mode Details - Manner Mode
 - Text Entry
 - Public Mode (Drive Mode)
- · Performing this option deletes the following:
 - Last dialed number
 - Call time (except "Lifetime")
 - Call cost (except "All Calls")
 - Greetings
 - IDD Prefix Settings
- · Performing this function may delete some holidays (before the current day) pre-registered in the datebook.

Master Clear

Deleting All Data Registered

You can initialize settings of various functions changed to default settings and delete data you have registered.

● I General (Settings) (General

Settings"
 "Master Clear"
 Enter the Security Code . [Yes]

Upon completion of Master Clear, FOMA handset is restarted

Note

- · When Self Mode is set to "On", this option cannot be performed.
- The following data and registration contents will be deleted using this function:

- Go to location

- Bookmark*1
- Screen Memo - Last URL

- MessageR
- Host settings

_

- Certificate Center Host settings
 - i-appli*1 - Inbox - Unsentbox
 - Outbox
- -Setting member of ChatMail
- Deco-mail template*1 Edit quotation mark
- Signatures
- SMS Center Speed Dial
- Categories in Phonebook entries on the FOMA handset (Phone)
- Data in the Databox*1 - Alarms
- Datebook
- Record Message
- Recorded response message for Record Message
- _ Memory of the Calculator
- Barcode Reader -
- Search log entries of Electronic Dictionaries . - Received Calls
- Dialed Calls

-

- Last dialed number
- Call Time*2 - Additional Messages

- MessageF

- Register sending group

- Phonebook entries

- Call Cost*2 - Additional Service Bluetooth name
- Multi Number
- Bluetooth device list - New Word Dictionary
- Greetings
- -Download Dictionaries
- Edit Common Phrase*1 Learned Data
- Recorded data of voice call response hold areetina
- IDD Prefix Settings*1
- Country Code list*1 -
- My Network List*1
- Start failure history entries of i-appli Settings -
- Abnormal exit history entries of i-appli Settings
- Security error history entries of i-appli Settings
- Trace Output i-appli Settings
- My Personal Info
- User-created folders for each function
- *1: The pre-installed data will not be deleted.
- *2: Accumulated call time and accumulated call cost will not be deleted.
- Protected data is also deleted.
- Data saved in UIM or microSD memory card is not deleted.
- · Before performing Master Clear, confirm that the battery level is sufficient.
- During Master Clear, functions/communications are disabled.
- After this function is performed, the telop will no longer be displayed. Press [+] [i-Channel] to display the channel list, then the latest information is downloaded and the telop will be turned on.

Master Reset

Network Services

Network Services Available	280
Voicemail Service <voicemail></voicemail>	280
Call Waiting Service <call waiting=""></call>	281
Call Forwarding Service	282
Nuisance Call Barring Service <nuisance barring="" call=""></nuisance>	283
Caller ID Request Service	284
Dual Network Service <dual network=""></dual>	284
English Announcement Service <guidance language=""></guidance>	284
Service Dial <service dial=""></service>	285
Selecting Reaction to Incoming Call during a Call < Incoming Call Mgmt>	285
Setting Remote Control <remote control=""></remote>	285
Multi Number <multi number=""></multi>	286
Registering and Using Service < Additional Services (USSD registration) >	287

This manual describes the outline of network services from the aspect of the operation procedures using Menu on the FOMA handset. For details, refer to "Mobile Phone User's Guide [Network services] ".

Network Services Available

The following DoCoMo network services are available on the FOMA handset: For descriptions and usage of each service, see the pages listed in the table below.

- You cannot use network services while out of the service area or where there are no signals received.
- For details, refer to "Mobile Phone User's Guide [Network services] ".
- For subscription or inquiry, contact the "DoCoMo Information Center" listed on the back of this manual.

Service names	Subscription	Monthly charge	Reference
Voicemail service	Required	Charged	P280
Call Waiting service	Required	Charged	P281
Call Forwarding service	Required	Free	P282
Nuisance Call Barring service	Required	Free	P283
Caller ID Notification service	Not required	Free	P49
Caller ID Request service	Not required	Free	P284
Dual Network service	Required	Charged	P284
English Announcement service	Not required	Free	P284
Multi Number	Required	Charged	P286
Public Mode (Drive Mode)	Not required	Free	P70
Public Mode (Power OFF)	Not required	Free	P72

For services requiring subscription, contact "DoCoMo Information Center" on the back of this manual.

Note

- "Deactivate" does not mean canceling the contract of a service such as Voicemail or Call Forwarding service.
- This manual describes overview of network services through operations of FOMA handset menus. For details, refer to "Mobile Phone User's Guide [Network services] ".
- Network service is also available overseas. →P316
- When a new network service is provided from DoCoMo, it can be registered to the menu. →P287

Voicemail Service

When your handset is out of the service area or switched off, or you cannot answer a call, this service automatically responds to incoming voice/video calls and records messages.

- Up to 3 minutes can be recorded per voice message, and messages can be recorded for up to 20 voice calls and 20 video calls. Messages are retained at the center for up to 72 hours.
- When a message is recorded, a ppears at the top of the screen. However, a video message is recorded, a preserved of the screen but Incoming mail information(SMS) notifies you of the messages.
- When Record Message (P73) is activated concurrently, to use the Voicemail service first, set the ringing time of the Voicemail service shorter than the Response Time of Record Message.
- If you do not answer an incoming voice or video call when the Voicemail service is activated, the call is recorded as a "Missed Call" in Received Calls and the Missed call notification screen opens.

Basic Flow of Voicemail Service

Step 1: Set to activate the service Step 2: An incoming call is received* Step 3: Caller records a message Step 4: Replays message

*: When you are in a hurry, you may want to record a message without Response Greeting of Voicemail service. In such a case, you can immediately start message recording mode by pressing <u>start</u>.

Note

- When you are in the service area or FOMA handset is ON in Step 2, a ring tone sounds until Ringing Time set elapses. When an incoming call is not answered while a ring tone is sounding, it is connected to Voicemail service center. The ring time can be changed.
- When a message is recorded in Step 3, T appears at the top of the screen and missed call history is stored in Received Calls.
- Even with the Voicemail service set to deactivate, an incoming voice call can be connected the Voicemail Center manually from the Function menu. →P64
- To change the setting to connect video calls to the Voicemail service, make a voice call to "1412".
- When Chara-den is connected to the Voicemail service, push tone signals (DTMF) cannot be sent. Select "DTMF On" from the Function menu before sending push tone signals.→P82

Using Voicemail Service

● ▶ 🔏 (Network Services) ▶

"Voicemail" Perform the following operations

Play Messages

Make a call to Voicemail service center and replay a message.

IYes] Operate according to a voice guidance

Activate

Enter from 0 to 120 seconds for the Ringing Time.

- ♦ Image: Ima
- To start without changing settings, press INO].
- Enter Ringing Time by ()/Dial Keys

Deactivate

▶ ▲ [Yes]

Set Ringing Time

Set time before connecting to Voicemail service center after receiving a call. Enter a time from 0 to 120 seconds.

Enter Ringing Time by ()/Dial Keys

Voicemail Status

Confirm the current settings.

Voicemail Settings

Make a call to Voicemail service center and change the settings according to a voice guidance.

IYes] Operate according to a voice guidance

Check Messages

Check whether a new voice message is recorded.

Voicemail Intl

Operate the Voicemail service overseas. →P316

Note

Set Ringing Time

- When there is an incoming call with this time set to 0 second, it is connected to Voicemail service center with no ringing operation carried out and nothing recorded in Received Calls.
- When this time is shorter than that set for "Ring Delay", the call is connected to Voicemail service center with no ringing operation carried out.
- When this time is shorter than a response time set for "Record Message", this service operates by priority.

Voicemail Status

 You can activate or deactivate the Voicemail service, and set the ringing time from the Function menu.

Check Messages

 You may not be able to check voice messages recorded after checking the service even if you check the service again.

Incoming Call Information

Incoming call information is a service that notifies you with SMS of Received Call of an incoming call arrived while 醫外 is displayed or FOMA handset power is off. When you return to a network area or FOMA handset is turned on with Incoming Alert set to activate, SMS will be sent.

- This cannot be operated from a menu.
- For details, refer to "Mobile Phone User's Guide [Network services] ".

Enter "*2001" 🕨 💿

Subsequently, operate following the voice guidance.

Note

- Up to 5 received calls are provided by 1 incoming call information.
- Even when you set to "SMS—括拒否 (Reject All SMS)", incoming call information will be received.
- Charges do not apply for setting or receiving incoming call information (receiving of SMS).

Call Waiting

Call Waiting Service

When a call arrives during another call, a call termination during a call sounds. You can place the active call on hold and answer the other call. Or, you can place the active call on hold to make another call.

- To use the Call Waiting service, set "Incoming Call Mgmt" (P285) to "Answer Call" in advance. If this option is set otherwise, a voice call that arrives during another voice call cannot be answered even if Call Waiting service is activated.
- The caller continues to be charged call fee during call hold.
- · The Call Waiting service is not available if:
 - Dialing a number or ringing the other party
 - A voice call arrives during a video call
 - A video call arrives during a voice call

Call Waiting

Using Call Waiting

● ▶ 🔏 (Network Services) ▶ "Call Waiting" ▶ Perform the following operations

Activate

♦ 🖅 [Yes]

Deactivate

♦ 📕 [Yes]

Status Request

Confirm the current settings.

Answering Incoming Call Putting Current Call on Hold

When there is an incoming call during current Voice Call, you hear a call termination tone during a call from the Earpiece and incoming call screen opens.

Incoming call 🕨 🧾 [Answer] / 📀

The active voice call is placed on hold and you can answer the incoming call.

- To disconnect a call put on hold, activate it with the above procedure and press ().

Note

Making a Call Putting Current Call on Hold

You can make a new Voice Call, putting a current Voice Call on hold.

Voice Call screen (P52) 🕨 📥

"Function" ♦ "New Call" ♦ Enter a phone number ♦ 💿

The current Voice Call is put on hold.

- To disconnect a call put on hold, activate it with the above procedure and press (3).

Answering Incoming Call Terminating Current Call

Answer an incoming Voice Call, terminating the current Voice Call. You can answer the call even when using Call Waiting service.

Incoming call • [Function] • "End Active Call & Answer"

A Voice Call termination screen opens and then the Voice Call screen for the incoming call opens.

To answer another call after terminating the held call in case another call arrives when Call Waiting is activated

Press (Include) [Function] and select "End Held Call & Answer".

• The held call is terminated, and you can talk to the caller of the incoming call.

Call Forwarding

Call Forwarding Service

When your handset is out of the service area or switched off, or a call was not answered within the set ringing time, this service forwards the voice/video call.

- Forwarded to only a video-phone conforming to 3G-324M if a video call comes in.
- The subscriber to Call Forwarding service is changed the call cost for forwarding a call to a forwarding destination.
- This service is not available with some billing plans.
- When Record Message(P73) is activated concurrently, to use the Call Forwarding service first, set the ringing time of the Call Forwarding service shorter than the Response Time of Record Message.
- If an incoming voice or video call was not answered when the Call Forwarding service is activated, the call is recorded as a "Missed Call" in Received Calls and the Missed call notification screen appears.

Basic Flow of Call Forwarding Service

- Step 1: Register a phone number of forwarding destination
- Step 2: Set to activate the service
- Step 3: Incoming call arrives

Step 4: Forward call to forwarding destination

Note

- When you are in the service area or FOMA handset is on in Step 3, a ring tone sounds until Ringing Time set elapses. When an incoming call is not answered while a ring tone is sounding, it is forwarded to a forwarding destination. The ring time can be changed.
- When the call is forwarded in Step 4, it is recorded as a missed call in Received Calls.
- Even with the Call Forwarding service set to deactivate, an incoming call can be forwarded to a forwarding destination manually from the Function menu. →P64, P84
- You cannot answer a call when you do not subscribe to the Call Waiting service even if you hear a call termination tone during a call.

Call Forwarding

• When a forwarded call arrives, only the caller's phone number or name is displayed. The forwarding party's information will not be displayed.

Using Call Forwarding Service

● ► X (Network Services) ► "Call Forwarding" ► Perform the following operations

Activate

Enter from 0 to 120 seconds for the Ringing Time.

- "Number" Enter a phone number of forwarding destination
- To set to activate without changing settings of a forwarding destination phone number already registered, press <u>J</u> [Start] and press <u>J</u> [Yes].
- ▶ "Ringing Time" ▶ Use ()/Dial Keys to enter Ringing Time ▶ ▲ [OK] ▶ ▲ [Activate]

Deactivate

♦ 🖅 [Yes]

Register Forwarding Number

Enter forwarding destination phone number "Register Number Only" / "Register and Activate"

Fwd Party Busy Setting

Set whether to connect to Voicemail service center when the forwarding destination is busy.

▶ 🖅 [Yes]

Status Request

Confirm the current settings.

Call Forwarding Intl

Operate the Call Forwarding service overseas. →P316

Note

- The following operations can be performed by pressing h
 [Function] on the forwarding number entry screen:
 - Select in order of "Browse"
 "Phonebook"/

 "Received Calls"/"Dialed Calls" to select a phone
 number from a call log or Contact to enter the
 phone number.
 - Select "Cancel" to cancel saving.

 - Select "Editing Function" to edit the characters.
 →P298
 - Select "Cancel Entry" to cancel saving.

Ringing Time

 When there is an incoming call with this time set to 0 second, it is forwarded with no ringing operation performed and nothing recorded in Received Calls.

- When this time is shorter than that set for "Ring Delay", the call is forwarded with no ringing operation performed.
- When this time is shorter than a response time set for "Record Message", this service operates by priority.

Status Request

 You can activate or deactivate the Call Forwarding service, and configure the Forwarding Party Busy Setting from the Function menu.

Setting to Enable/Disable Forwarding Guidance

- This cannot be operated from a menu.
- For details, refer to "Mobile Phone User's Guide [Network services] ".
- Enter "1429" 🕈 💽

Subsequently, operate following the voice guidance.

Nuisance Call Barring

Nuisance Call Barring Service

This service rejects incoming nuisance calls. After a phone number is registered to be rejected, all incoming calls from that number will be automatically rejected, and a voice guidance is played to the caller.

Nuisance Call Barring

- Up to 30 phone numbers can be registered.
- Even when a call arrives from the phone number to be rejected, the ringtone does not sound. Also, the call is not recorded in Received Calls.

(●) ► 🛣 (Network Services) ► "Nuisance Call Barring" ► Perform the following operations

Register Caller

Set to reject the phone number of the last incoming call received and you talked over.

IOK]

Delete Last Entry

The last saved phone number is deleted. Repeat the same steps to delete one phone number from last saved one at a time.

▶ ▲ [Yes]

Delete All Entries

Delete all registered phone numbers.

🕨 🖅 [Yes]

Note

Register Caller

 When 30 phone numbers have already been registered, a confirmation screen opens asking whether to delete the oldest phone number for new registration. Press A [Yes] to register.

Specifying a Phone Number to Be Rejected

- · This cannot be operated from a menu.
- For details, refer to "Mobile Phone User's Guide [Network services] ".

Enter "144" 🕈 💿

Subsequently, operate following the voice guidance.

Caller ID Request

Caller ID Request Service

This service responds a voice/video call without Caller ID, plays a voice guidance requesting to send Caller ID, and terminates the call automatically.

 Calls that were not answered due to the Caller ID Request service are not recorded in Received Calls, and the Missed Call notification screen does not appear.

● ▶ 🔏 (Network Services) ▶ "Caller ID Request" ▶ Perform the following operations

Activate

🔶 🖃 [Yes]

Deactivate

♦ 🖅 [Yes]

Status Request

Confirm the current settings.

Note

• This service is applicable only to calls with "Private Calling" set as a reason for hiding caller ID.

Dual Network

Dual Network Service

This service allows you to use the mova service with your FOMA handset phone number. You

can switch between FOMA and mova depending on the service area.

- You cannot use the FOMA service and mova service concurrently.
- Switch networks using the Dual Network service when the handset is not accessing network services.
- ▶ 🔏 (Network Services) ▶ "Dual Network" ▶ Perform the following operations

Switch Network

Switch mova to FOMA to make FOMA handset available.

[Yes] Enter the Network Security Code

Status Request

Confirm the current settings.

Note

• When switching from FOMA to mova, operate from a mova handset.

Switch Network

• Switching the network during communication forcibly terminates it.

Guidance Language

English Announcement Service

The voice guidance played when a network service such as Voicemail service is activated or when the handset is out of the service area can be played in English.

Incoming calls (Guidance to the caller)

Language	Description
Japanese	Voice guidance is played in Japanese.
Japanese+ English	Voice guidance is played in Japanese and then in English.
English+ Japanese	Voice guidance is played in English and then in Japanese.

Outgoing calls (Guidance to yourself)

Language	Description
Japanese	Voice guidance is played in Japanese.
English	Voice guidance is played in English.

 When the caller is using this service at the same time, the caller's settings for making calls have precedence over the receiver's settings for receiving calls.

● ▶ 🔏 (Network Services) ▶ "Guidance Language" ▶ Perform the following operations

Incoming+Outgoing

Set voice guidance collectively for incoming and outgoing calls.

♦ Select language for incoming calls ♦ ▲ [Select] ♦ Select language for outgoing calls ♦ ▲ [Select]

Incoming Only

Select language for incoming calls

Outgoing Only

Select language for outgoing calls

Status Request

Confirm the current settings.

Service Dial

Service Dial

You can make a call to DoCoMo Information Center and contacts for inquiries concerning malfunctions.

- Depending on your UIM, the items displayed may differ or some items may not be displayed.
- • X (Network Services) "Service Dial" • Perform the following operations

ドコモ故障問合せ (Failure Inquiry)

Make a call to contacts for inquiries concerning malfunctions.

Select an item and press Implies [Call] or (•) to make a call.

ドコモ総合案内・受付 (Information Center)

Make a call to DoCoMo Information Center. • Select an item and press \square [Call] or (•) to make a call.

Incoming Call Mgmt

Selecting Reaction to Incoming Call during a Call

Default Answer Call

You can set how to respond to an incoming voice call/video call or 64K Data communication during a call when you subscribe to the Voicemail, Call Waiting, and Call Forwarding services.

- You cannot respond to an incoming call during a call if you do not subscribe to the Voicemail, Call Waiting, and Call Forwarding services.
- Activate "Incoming Call Setting" to use incoming call setting options.



Answer Call

Make incoming call actions. When Voicemail, Call Waiting and/or Call Forwarding services are set to activate, their settings are used for operation.

Send to Voicemail

Connect an incoming call arriving during a call/ communication to Voicemail service center.

Forward Call

Forward an incoming call arriving during a call/ communication to a forwarding destination.

Reject Call

Reject an incoming call arriving during a call/ communication.

Incoming Call Setting

You can set to activate/deactivate a reaction selected from "In-call Arrival Act".

Activate

♦ 🖅 [Yes]

Deactivate

🕈 🖃 [Yes]

Status Request Confirm the current settings.

Remote Control

Setting Remote Control

You can set a landline phone or pay phone with push system, or DoCoMo handset to operate the Voicemail or Call Forwarding service.

- To use the Voicemail or Call Forwarding services overseas, remote operation must be activated in advance.
 - ▶ 🜋 (Network Services) ▶

"Remote Control" > Perform the following operations

Activate

Deactivate

▶ ▲ [Yes]

Continued on the next page ••• 285

Multi Number

Multi Number

This service allows you to use up to 2 extra phone numbers, additional number 1 and additional number 2, as your FOMA handset phone number in addition to the basic subscription number.

- On the Dialing/Incoming screen, icons corresponding to Multi Number(基本契約番号(Basic subscription number)/付加番号1(Additional Number 1)/付加番号 2(Additional Number 2)) appear.
- When dialing from Dialed Calls or Received Calls, the Multi Number dialed from/received to is displayed, and this number is used to dial.

Registering Additional Number(s)

You can register or set name, number/ring tone for additional numbers.

(Network Services) "Multi Number"

		Multi Number 基本契約番号 付加番号1 付加番号2 Status Request
		Multi Number screen
2	Select a registration numb [Function] • "Edit"	er 🕨 🕞
		(封加番号) Name: 付加番号) Phone Number: Ringer ID: <u>None</u>
		Edit screen (Example: Additional Number 1)
3	Perform the following oper	rations
	When "Basic Number" is selected be registered.	d, only a name can
20 h	ne er a name of an additional number. U nalf-pitch characters can be entered. Inter a name	p to 10 full-pitch or

Enter a name

Phone Number

Register an additional number. Up to 26 digits can be entered.

Enter a number

Ringer ID

Set a ring tone/vibration pattern to be emitted when there is an incoming call to a registered additional number.

i-motion	 Select from videos/i-motion movies saved in the "i-motion" folder. ♦ Select the folder ♦ ● ♦ Select a video/ i-motion movie ♦ ● 			
Melody	 Select from melodies saved in the "Melody" folder. ♦ Select a folder ♦ ● ♦ Select a melody ● 			
Voice Notes	 Select from Voice Notes saved in the "Voice Notes" folder. "Voice Notes (AII)"/"My Notes" Select a Voice Note (AII)"/"My Notes" 			
Vibration Pa	Vibration Pattern			
	: Select from 5 types of vibration patterns. →P116			
	Select a vibration pattern			
Silent	: Set the handset to not sound the ringtone/ to not vibrate.			
None	: In accord with the settings in "Profile".			

Isave] Isave]

Note

- · The following operations can be performed by pressing I [Function] on the Multi Number screen:
 - Select "View" to check the content of the selected number.
 - Select "Edit" to modify the selected number.
 - Select "Set Default" to set the selected number as the number to be used normally.

Ringer ID

· The file formats that can be set are as follows (Some files that setting is restricted or that include only sound or image may not be set). SMF, MFi, MP4 (Mobile MP4), AMR

Setting Default

You can set a registered additional number as a phone number used for making ordinary calls.


Multi Number screen (P286) Select a number **•** (•) **•** Image [Yes]

Confirming Primary Number Settings

Multi Number screen (P286) "Multi Number" "Status Request"

Setting Dial Number for Each Call

Enter a phone number



२ ७∕।⊙

Making Video Call Press

Note

 When a dial number is selected, the phone number is succeeded by "*590# (Basic Number)"/"*591# (Additional Number 1)"/"*592# (Additional Number 2)".

Additional Services (USSD registration)

Registering and Using Service

When DoCoMo adds a new network service, you can add the service into the menu. Up to 10 new Network services can be registered.

Adding Service

Register a service name and "Special number"/ "Service number (USSD)" informed from DoCoMo.

- Special number is a number used to connect to Service Center.
- Service number (USSD) is a code used to notify to Service Center.
- ► X (Network Services) ► "Additional Service"



Services screen

2 "New Service" > Perform the following operations

Service Name

Enter a service name. Up to 10 full-pitch or 20 half-pitch characters can be entered.

Enter a service name

USSD Code

Register Special number/Service number (USSD). Up to 20 digits can be entered.

Enter Special number/Service number (USSD)

김 🖅 [Complete]

Note

USSD Code

- - Select in order of "Browse"

 "Phonebook"/

 "Received Calls"/"Dialed Calls" to select a phone
 number from a call log or Contact to enter the
 phone number.
 - Select "Cancel" to cancel saving.
 - Select "Insert" ▶ "Pause", "Wait", or "n" to enter "p", "w" or "n" in the order after the entered phone number. →P57
 - Select "Editing Function" to edit the characters.
 →P298

Function Menu on Additional Services Screen

- The Function menu is available only when an additional service is selected.

New

Go to Step 2 (P287) of "Adding Service".

Edit

Modify a selected service. Go to Step 2 (P287) of "Adding Service".

Delete

Delete a selected service.

🕨 🖅 [Yes]

Delete All

Delete all services added.

▶ Ⅰ_ [Yes]

Performing Added Service

Additional Services screen (P287) ♦ Select a service ♦ ● ♦ ♠ [Yes] Connect to Service Center.

Registering Additional Message

You can register up to 10 answer messages for code (USSD) returned from Service Center when an added service makes a connection to Service Center with service code (USSD).

● ▶ X (Network Services) ▶ "Additional Msg"

To check the added Answer Message Select an Answer Message and press •. The detail screen opens. You can check the message and the service code (USSD).



screen

2 "[New Message]" Perform the following operations

Message

Up to 10 full-pitch or 20 half-pitch characters can be entered.

Enter an answering message

USSD String

Register service code (USSD). Up to 20 digits can be entered.

Enter service code (USSD)

[Complete]

Note

USSD String

- The following operations can be performed by pressing]
 [Function] on the USSD entry screen:

 - Select "Cancel" to cancel saving.
 - Select "Insert"

 "Pause"/"Wait"/or "n" to enter "p"/"w"/"n" in the order after the entered phone number. →P57
 - Select "Editing Function" to edit the characters.
 →P298

Function Menu on Answering Message Setup/Detailed Screen

• The Function menu is available only when an additional message is selected.

Additional message screen (P288)/ Detailed screen ♦ → [Function] ♦ Perform the following operations

New

Go to Step 2 (P288) of "Registering Additional Message".

Edit

Modify a selected/displayed answer message. Go to Step 2 (P288) of "Registering Additional Message".

Delete

Delete a selected/displayed Additional Message.

Leite All

Delete all additional messages.

♦ 📕 [Yes]

Network Services

Data Communication

Data Communication	290
Before Using	291
Preparing for Data Communication	292
AT Command	293

For details of data communication, refer to "Manual for Data Communication" (PDF format) in included CD-ROM.

To view "Manual for Data Communication" (PDF format), you must have Adobe Reader (Version 6.0 or up recommended).

When Adobe Reader is not installed in your PC, you can download it of the latest version from Adobe Systems' web site (communication charges apply). For details, visit Adobe Systems' web site.

Data Communication

When FOMA handset is connected to a PC, data communication is enabled in 3 modes: packet communication, 64K data communication and data transfer (OBEX).

Data Communications Enabled from FOMA Handset

Packet communication

Communication mode charged by the size of data sent and received. It allows data communication at the maximum rate of 384 Kbps for reception and 64 Kbps for sending.

To use packet communication, you must connect FOMA handset to a PC with FOMA USB Cable (optional) or Bluetooth and use an access point of DoCoMo internet connection service "mopera U" or "mopera" compatible with FOMA packet communication.

 Communication charges may become high when you send or receive large amounts of data using packet communication.

64K data communication

Communication mode charged based on time of connection to network. It allows data communication at the rate of 64 Kbps. To use 64K data communication, you must connect FOMA handset to a PC with FOMA USB Cable or Bluetooth and use an access point of DoCoMo internet connection service "mopera U" or "mopera" compatible with FOMA 64K data communication or an access point compatible with ISDN synchronous 64K.

 Communication charges may become high when connected to a network for a long time using 64K data communication.

Data transfer (OBEX)

Communication mode for sending or receiving data using FOMA USB Cable (optional), infrared function or Bluetooth.

To transfer data between FOMA handsets and a PC connected to each other with FOMA USB Cable or Bluetooth, you must install the Data Link Software (P340) to the PC. To transfer data with infrared or Bluetooth function, that function must be installed in a PC or other devices used for communication.

Connecting FOMA Handset to PC, etc.

For data communication, FOMA handset can be connected to a PC, etc. in the following ways:

- Using FOMA USB Cable (USB connection) FOMA handset connected to a device such as a PC with FOMA USB Cable is available for all communication modes (packet communication, 64K data communication and data transfer (OBEX)).
 - When using FOMA USB Cable for connection, a communication setup file (driver) must be installed.
 For details on connection and each operation, refer to "データ通信マニュアル (Data Communication Manual)" (PDF format).
 - When using FOMA USB cable, set "USB mode Setting" to "Communication mode".

Using Bluetooth (Bluetooth connection) Use of Bluetooth makes all communication modes (packet communication, 64K data communication and data transfer (OBEX)) available.

 When using Bluetooth for connection, use a standard Bluetooth modem or a Bluetooth modem provided by Bluetooth device manufacturers. For installation and settings, contact manufacturers of your PC or Bluetooth device.

Using Infrared

Use of infrared function makes data transfer (OBEX) available.

Data can be sent and received to/from a device such as a PC with infrared function installed.

Communicating →P252

Precautions for Use

Usage fee of internet service provider When using internet, you will be charged for usage fee from internet service provider (hereinafter, referred to as provider) connected. This usage fee is to be paid directly to the provider, independently of FOMA service usage fee. For details of the usage fee, contact the provider.

DoCoMo internet connection service "moperaU" or "mopera" is available. "mopera U" is a charged service requiring subscription. "mopera" is a service free of charge requiring no subscription.

Setting access point (provider, etc.) Packet communication and 64K data communication use different access points. Packet communication requires to use an access point compatible with packet communication and 64K data communication requires one compatible with FOMA 64K data communication or ISDN synchronous 64K.

- · DoPa access points are not available.
- PHS64K/32K data communication access points for PIAFS, etc. are not available.

User authentication for network access

Some access points may require user authentication (ID and password) for connection. In that case, enter ID and password for connection using communication software (dialup network). ID and password are provided from the provider or network administrator of the access point. For details, contact the provider or network administrator of the access point.

Access authentication for using browser With Access authentication for using browser to use FirstPass sites, visit the web site of the following URL, download the FirstPass PC software, install it and make settings. http://www.nttdocomo.co.jp/support/download/ index.html

Conditions for packet communication or 64K data communication

Communication using FOMA handset requires the conditions given below.

(Even with these conditions arranged, communication may be disabled due to congestion in the base station or under some radio wave reception levels conditions.)

- FOMA USB Cable (optional) must be available on the PC.
- For Bluetooth connection, a PC or another device must be compatible with Dial-Up Networking Profile of Bluetooth standard Ver.1.2.
- FOMA handset must be in FOMA service area, or the handset must be in the service area of the affiliated international carrier.
- For packet communication, the access point must be compatible with FOMA packet communication.
- For 64K data communication, the access pint must be compatible with FOMA 64K data communication or ISDN synchronous 64K.

Terms of data communication APN (Access Point Name)

Identification of access point for packet communication (provider or LAN). Internet connection service "mopera U" of DoCoMo is represented as "mopera.net" in APN.

cid (Context Identifier)

Registration No. for registering access point (APN) for packet communication to FOMA handset. FOMA handset allows to register 10 APNs using cid 1 to 10.

DNS (Domain Name System)

System for converting understandable domain names such as "nttdocomo.co.jp" to numeric addresses managed by computers.

OBEX (Object Exchange)

Communication protocol for file transfer defined by IrDA (Infrared Data Association). Data such as phonebook, schedule contents, images can be sent or received to/from devices compatible with OBEX protocol.

QoS (Quality of Service)

Represents network service quality. FOMA handset allows to specify data communication rate condition (the actual rate varies depending on

communication conditions, etc.).

W-TCP

TCP parameter used for packet communication through FOMA network to make the most of TCP/IP transmission capability. To make the most of FOMA handset communication performance, TCP parameter optimization is necessary.

PC administrative right

Right allowed to access all of Windows XP and Windows 2000 systems. Users without administrative right is not allowed to install or uninstall communication setup file (driver) or FOMA PC setup software.

Before Using

Operating Environment

PC's operating environmental conditions required for data communication are given below.

Items	Requirements
PC	 PC-AT compatible machine enabled to use CD-ROM drive USB port (Universal Serial Bus Specification Rev1.1/2.0) Display with resolution 800 x 600 dots, High Color (65,536 colors) or higher recommended When performing communication via Bluetooth connection Dial-up Networking Profile compatible device that complies with Bluetooth Standard Version 1.2.
OS*1	 Windows XP, Windows 2000 (Japanese version)
Memory	 Windows XP: 128M bytes or more*2 Windows 2000: 64M bytes or more*2
Hard disk	Empty space of 5M bytes or more*2

*1: DoCoMo does not guarantee proper operation if you upgrade your OS.

*2: Equipments for memory/hard disk may vary depending on PC system configuration.

Note

- Data communication may be unavailable for some operating environmental conditions. DoCoMo will not accept inquires about or not guarantee operations under operating environmental conditions not mentioned in "Operating Environment".
- FOMA handset is not compatible with Remote Wakeup.
- FOMA handset does not support FAX communications.
- Because this communication configuration file (driver) does not acquire the "Designed for Windows" logo, a message indicating that this file has not pass the Windows logo test may appear when you install the file to a PC. In this case, click "続行(Continue)" to install the file.

Required Devices

To use data communications, the following are required in addition to the FOMA handset and a PC:


- FOMA USB Cable (optional)*
- CD-ROM for FOMA M702iG (accessory)
- FOMA miniUSB Conversion Adapter M01 (accessory)
- *: The FOMA USB Cable and the FOMA miniUSB Conversion Adapter M01 are not required for a Bluetooth connection.

Note

 For a USB connection, purchase the exclusive FOMA USB Cable. Commercially available USB cables have the wrong shape connectors and cannot be used.

Preparing for Data Communication

Flow for preparing for packet or 64K data communication is as shown below. For details, refer to "Manual for Data Communication (PDF format)".

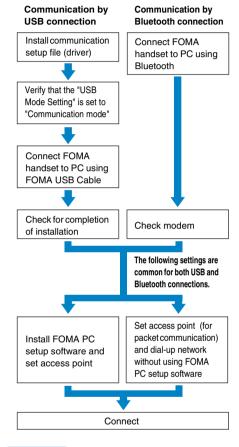

Note

 You can also download "M702iG Communication Setup File (Drivers)" or "FOMA PC Setup Software" that is contained on the "CD-ROM for FOMA M702iG" from DoCoMo's web site. http://www.nttdocomo.co.jp/support/download/

Data Communication Software included in "FOMA M702iG用 CD-ROM (CD-ROM for FOMA M702iG)"

M702iG Communication Setup File (driver)

This file is to be installed on a PC so that communication or file exchange can be performed after the FOMA handset and the PC are connected using the FOMA USB Cable (optional).

FOMA PC Setup Software

This software is to be installed on a PC to quickly configure settings of dial-up connection, etc. that is required to perform data communication.

AT Command

AT command is used to make and confirm function settings for FOMA handset from a PC. For details, refer to "Manual for Data Communication" (PDF format) in included CD-ROM.

Character Entry


Character Entry	296
Entering Characters	297
Making Character Entry Settings <entry setup=""></entry>	299
Modifying/Registering Common Phrase <edit common="" phrase=""></edit>	300
Copying/Cutting and Pasting Characters	301
Using Kuten Code for Entry <kuten code=""></kuten>	302
Registering Frequently Used Words <new dictionary="" word=""></new>	302
Initializing Learned Data <reset data="" learned=""></reset>	303
Using Downloaded Dictionaries <download dictionary=""></download>	303

Character Entry

Character entry is required for various operations such as registering phonebook or creating mail. Learn about character entry to take advantage of FOMA handset.

Character Entry Screen

Character entry screen displays the following information:



- Eng: Alphabetic entry mode
- 123 : Numeric entry mode
- Image: Kuten Code entry mode
- 3 Available number of characters to be entered/Available bytes to be entered The number is reduced as you enter and fix

characters. **4 Pitch Mode**

- 1 Full-pitch
- 1/2: Half-pitch

6 Cursor

Indicates a position to enter a character. Blinks in entry waiting state.

6 Conversion option

Conversion option displayed are words or phrases predicted from characters entered or those predicted to succeed entered characters.

 This is displayed when "Japanese matching" and "Japanese next word" in "Japanese Prediction" (P299) are set to "On" in hiragana entry mode, or when "English Matching" and "English Next Word" in "English Settings" (P300) are set to "On" in English entry mode.

Note

 On this FOMA handset, only the kana entry method (multiple characters are assigned to a Dial key, and each press of the Dial key switches the character) is available.

Available number of characters to be entered/ Available bytes to be entered

 For the character entry screen that has a fixed number of available characters regardless of fullpitch/half-pitch characters, the available number of characters reduces by one after 1 character is entered and fixed. For the character entry screen that has a fixed number of bytes, the available bytes reduces by 2 when a full-pitch character is entered and reduces by 1 when a half-pitch character is entered.

Switch Entry Mode

To change entry mode, press 🗼 [Function], select "Entry Mode" and select an entry mode to be used.

Entry modes and characters available are listed below.

Entry modes	Characters that can be entered
Hiragana	Hiragana characters (enabled to be converted to Kanji, Pictograph (E-Moji), emoticon, numeric, full-pitch Katakana, or symbol)
Pictograph	Pictograph (E-Moji)
Emoticon	Emoticon
Number	Full-pitch/half-pitch numeric characters (enabled to enter some symbol)
Alphabet	Full-pitch/half-pitch alphabetic characters (enabled to enter some symbol)
Katakana	Full-pitch/half-pitch Katakana (enabled to enter some symbol)
Symbol	Full-pitch/half-pitch symbol
Kuten Code	Hiragana, Kanji, full-pitch Katakana, full- pitch numeric, full-pitch alphabetic, symbol, etc.

Switching full-pitch/half-pitch setting

Press (for 1+ seconds).

- This is available when the entry mode is Katakana/Alphabet/Number.
- Unavailable before characters are fixed.

Switching upper/lower case setting

Upper/lower case mode is toggled each time spressed after entering a character, such as an alphabetic character or """, which is available in 2 modes.

· Unavailable after characters are fixed.

Main operations using other than the Dial kevs

- Each press of this key switches the entry mode in the order of "hiragana \rightarrow katakana \rightarrow Roman letters → numbers". Press this key when entered characters are not fixed to convert to katakana and alphanumeric.
- Each pressing changes the list screen in the order of Pictograph (E-Moji) → Emoticon → Symbol.
- \bigcirc : Insert linefeed. Each press of this key when entered characters are not fixed returns to the character displayed before the last key press.
- (for 1+ seconds) : Enter a full-pitch/half-pitch space (conforming to current Pitch Mode).
- : When the entry mode is in Hiragana/Katakana and entered characters are not fixed, toggle voiced sound and semivoiced sound by pressing the key to add/enter them. When an unconfirmed hiragana character can only take a voiced sound symbol, the voiced sound symbol will be added.

(for 1+ seconds)

- : Copy characters. →P301
- (for 1+ seconds): Paste characters.

Entering Characters

After entering some characters, you can select a target word or phrase from conversion option using prediction function. By repeating this procedure, you can quickly enter text.

· For characters that can be entered with the Dial keys, see "Dial Keys Assignments to Characters" (P328).

Entering Kanji/Hiragana/Katakana (Full-Pitch)

<Example: Entering "定例会議" as a schedule subject>

Create Event screen (P261)
 "Subject" Character entry screen opens.

Enter "ていれいかいぎ" in Hiragana entry mode

- "て": Press 45 4 times
- "し)": Press 1 twice
- "ບາ": Press 💽 twice
- "か": Press [**2*] once
- "し)": Press 1 twice
- "ぎ": Press ∞2^{*} twice ♦ Press 🐜 once

- · Words and/or phrases predicted from entered characters appear as conversion option.
- · Up to 20 characters can be converted at a time.
- When using the same key to enter the next character, press () to move the cursor then enter the next character.
- Pressing

 fixes the characters without

 converting them.
- · When the target character appears as a conversion option while entering characters, go to Step 3 at this point.
- Use (b) to move the cursor to the conversion option
 Use
 to select

"定例会議" ▶ 🖅 [Confirm]/●

Selected characters are fixed.

To enter characters from the conversion option subsequently

Use 🚯 to select the characters and press Image: Confirm]/(●).

To enter characters by canceling the conversion options

You can start entering characters pressing Dial keys, or press [Cancel]/ (IRG).

When the conversion has completed Icancel

The conversion options disappear.

When the entry has completed (•)

Note

- · Even with "J Matching" or "J Next Word" set to "On", no conversion function may not appear when there are no prediction option.
- Conversion option displayed may be different depending on learned data (P303) and/or dictionaries used.
- · A complicated Kanji character may appear with its parts deformed or omitted.

Changing conversion range

If you enter a long text string and the target character does not appear as a conversion option, press ___[Convert] to specify the range to convert. Use () to specify the range Use () to select characters to convert • [Confirm]. To convert more characters. repeat these steps. Converting while "J

Matching" is "OFF"

[Confirm].



Character Entry **Characters**

Continued on the next page •••

Enter characters, then press 1 [Convert]/

Press () to select a target text Press

Press () to open the conversion option list screen

Converting characters being entered to Katakana/alphabetic/numeric characters Enter characters and press in [Kana-ei-su] Use () to select characters to convert Press () Confirm].

Modifying Characters

When incorrect characters are entered, they can be deleted by pressing $\overline{\text{care}}$.

Move cursor by \bigotimes to the left of

character to be deleted **b**

The character positioned at the right of the cursor is deleted.

 (for 1+ seconds): Delete all characters after the cursor displays at the right.

Deleting all characters entered Move cursor to the right of the last character and press (ifor 1+ seconds).

Note

 To restore the characters deleted by the preceding operation, press in [Function] and select "Undo".

Function Menu on Character Entry Screen

 Displayed items vary depending on the options or entered characters on the character entry screen.

Character entry screen (P296) ♦ → [Function] ♦ Perform the following operations

Copy Text

Copy characters. →P301

Cut Text

Character Entry

Entering Characters

Cut characters. →P301

Copy All Text

Copy all characters entered. →P301

Cut All Text

Cut characters entered. →P301

Paste

Paste copied/cut characters. →P302

Undo

Restore characters cut or pasted or those deleted by pressing $\langle \widetilde{ase} \rangle$.

Import

- Phonebook : A phone number saved in the Phonebook will be quoted and entered.
 - Select a Phonebook entry $\bullet \bullet$
 - If multiple phone numbers is saved, use to display the phone number to quote and press •.

My Personal Info: Your mobile phone number will be guoted and entered.

♦ Image: A part and a construction of the construction of the

Common Phrase

Enter a common phrase. →P298

Entry Mode

Switch the entry mode. →P296

Entry Setup

Make various settings related to character entry. →P299

English Functions

Set collectively "English Settings" of "Entry Setup" ON/ OFF.

"Turn On"/"Turn Off"

Barcode Reader

Start the barcode reader, scan the code, and paste the scanned code information to the character entry screen.

- Display the code on the screen
- When the barcode reader is running, press ____ [Light On]/____ [Light Off] to turn on/off the Photo Light.

Note

- The function menu on the message entry screen →P185
- In the numeric entry screen, pressing

 [Function] and selecting "Edit function" may use the
 function menu of the character entry screen. Also,
 when "Clear" appears on the function items, you can
 delete 1 line by selecting this.

Barcode Reader

 Align the Macro Mode Switch to , keep the Camera 10 cm away from the target code, then scan the code.

Entering Common Phrase

You can use common phrases saved in FOMA handset for entry. There are 8 common phrase folders, each containing 8 common phrases.

- Templates are not saved in "User Folder 1" or "User Folder 2" as default.
- Character entry screen (P296) 🕨 👍

[Function] • "Common Phrase"

Select Common Phrase folder list screen appears.



Select a folder Select] Select] Select a common phrase [Select]

Entry confirmation screen opens.

[Select]

Enter a common phrase.

Note

- · Common phrases can be modified/registered. →P300
- List of Common Phrases →P333

Entering a Symbol

You can select and enter a symbol from a list screen. The list of full-pitch symbols is totally 7 pages and the list screen of half-pitch symbols is totally 1 page.

Character entry screen (P296) 🕈 🖃 [Function] Function "Entry Mode" Function "Symbol"

Symbol list screen opens.

· The list of full-pitch symbols opens when full-pitch characters are to be entered, and the list screen of half-pitch symbols opens when half-pitch characters are to be entered.

Select a symbol **b** [Confirm] Symbol is entered.

Note

- You can also display Symbol list screen by pressing 3 times on character entry screen.
- Symbol/Special character list →P329

Entering Pictograph/Emoticon

You can select and enter a Pictograph (E-Moji)/ Emoticon from a list screen. Pictograph (E-Moji) list screen has 3 pages of E-Moji 1 and 2 pages of E-Moii 2.

Character entry screen (P296) [Function] "Entry Mode"

"Pictograph"/"Emoticon"

Pictograph (E-Moji) list screen/Emoticon list screen opens.

Select a Pictograph (E-Moji)/Emoticon 🕨 [Confirm]

Pictograph (E-Moji) or Emoticon is entered.

Note

- · You can also display Pictograph (E-Moji) or Emoticon list screen by pressing 🖾 once or twice on character entry screen.
- Pictograph (E-Moji)/Emoticon list →P331

Entry Setup

Default

Making Character Entry Settings

Make various settings related to character entry.

Setting Japanese Prediction Function

J Matching: On J Next Word: On

You can set whether to use word completion function and/or next word prediction function for Japanese entry.

- Character entry screen (P296)
 - [Function] "Entry Setup"

Japane	se Prediction
Englis	h Settings
	Timeout
Pitch	Mode: <u>Half</u>
	t: English

Entry Setup screen

[Japanese Prediction] • Perform the following operations

J Matching

Set whether to display words and/or phrases predicted from entered characters as conversion option.

"On"/"Off"

J Next Word

When "J Matching" is set to "On", set whether to display words and/or phrases predicted to succeed fixed characters as conversion option.

"On"/"Off"

Setting English Entry and Prediction Function

Default	Auto SPC Insert: On Auto Cap: On E Matching: On E Next Word: On
Default	Auto Cap: On E Matching: On E Next Word: On

You can make various settings, e.g., inserting a space after fixing alphabetic characters or converting a heading alphabetic character to an upper case. Also, you can also set whether to use word completion function and/or next word prediction function for English entry.

Entry Setup screen (P299) • "English Settings" • Perform the following operations

Auto SPC Insert

When "E Matching" is set to "On", set whether to automatically insert a space when entered alphabetic characters are fixed.

"On"/"Off"

Auto Cap

Set whether to automatically convert the alphabetic character entered and/or the first alphabetic character entered after a period to an upper case.

"On"/"Off"

E Matching

You can set whether to display words and/or phrases predicted from entered characters as conversion option.

"On"/"Off"

E Next Word

When "E Matching" is set to "ON", set whether to display words and/or phrases predicted to succeed fixed alphabetic characters appear as conversion option.

"On"/"Off"

Setting to Fix Characters Automatically

Default Hira/Kata: Off English: Middle

You can set so that characters entered in Hiragana, Katakana or Alphabetic entry mode are automatically fixed.

Entry Setup screen (P299) • "Cursor Timeout" • "Hira/Kata"/"English" • Perform the following operations

Off

Do not automatically fix characters.

Short

Fix characters in approximately 1 second after entry.

Middle

Fix characters in approximately 1.5 seconds after entry.

Long

Fix characters in approximately 2 seconds after entry.

Setting Full-pitch/Half-pitch

Default Half

Toggle between full-pitch and half-pitch when the entry mode is Katakana, Alphabetic or Numeric entry mode.

Entry Setup screen (P299) ♦ "Pitch Mode" ♦ "Half"/"Full"

Note

• You can also switch full-pitch/half-pitch by pressing and holding (for 1+ seconds) on character entry screen.

Setting Character Entry Mode

Default English

You can set entry mode used when displaying character entry screen by selecting from Hiragana, Alphabet or Katakana.

Entry Setup screen (P299) ♦ "Default" ♦ "Hiragana"/"English"/"Katakana"

Note

- This setting is enabled only when the Character entry screen in which the Hiragana entry mode is available.
- When this option is set on one text entry screen, it also is set on all other text entry screens of each application. For example, if this setting is changed on the message text entry screen, the change is also made on the character entry screen opened from the mail application.

Edit Common Phrase

Modifying/Registering Common Phrase

When frequently used greetings and/or phrases are registered as common phrases, they can be quickly called up and entered when entering characters.

Registering Common Phrase

New common phrases registered can be saved to "User Folder 1"/"User Folder 2". Each folder can save up to 8 common phrases.

● ► 🔐 (Settings) ► "General Settings" ► "Text Entry" ► "Edit

Common Phrase"



screen

2 "User Folder 1"/"User Folder 2" "[New Entry]"



Phrase screen

Enter a common phrase

The common phrase is registered.

• Up to 64 full-pitch/half-pitch characters can be entered.

Modifying Pre-installed Common Phrases

If you have registered common phrases to user folders, you can also modify them.

 ● ↓ ↓ (Settings) ● "General Settings" ● "Text Entry" ● "Edit Common Phrase" ● Select a folder ●
 ▲ [Select]

	Greeting
ありがる	とう
ごめん	b
おはよう	5
おやする	74
よろし・	<
元気?	
お疲れれ	康
"G	areeting"
com	mon phrase
lis	st screen

🕨 Select a common phrase 🕨 💽

Common phrase edit screen opens with the selected common phrase entered.

2 Modify the common phrase

The common phrase is registered.

• Up to 64 full-pitch/half-pitch characters can be entered.

Common Phrase List Screen

Edit

Modify a common phrase currently selected. Go to Step 3 (P301) in "Modifying Pre-installed Common Phrase".

Delete

Delete a registered common phrase.

🕈 🖅 [Yes]

Reset to Default

Initialize common phrases to the default settings.

🕈 🖃 [Yes]

New

Register a common phrase. Go to Step 3 (P301) in "Registering Common Phrase".

Copying/Cutting and Pasting Characters

You can copy/cut characters and paste them to other locations and/or screens. Copied/cut characters can be pasted any number of times until FOMA handset is turned OFF or new characters are copied/cut.

Copying/Cutting Characters

You can select a range of entered characters and copy/cut them. Also, all characters entered can be copied/cut.

• Up to 10000 full-pitch/half-pitch characters can be copied/cut.

Character entry screen (P296) 🕨 🔙

[Function] • "Copy Text"/"Cut Text"

Copying/cutting all characters entered Select "Copy All Text"/"Cut All Text". All entered characters in the screen are copied or cut and operation ends.

Characters in the selected range are saved.

• When cut is carried out, characters in the selected range disappear.

Note

- You can also carry out copy by pressing and holding
 (for 1+ seconds) in the text entry screen.
 Specify the start and end points of text to copy, in the same manner as in Step 2 and 3.
- To undo character cut, press I [Function] and select "Undo".

Pasting Characters

Paste copied/cut characters.

Character entry screen (P296) ♦ Move cursor to pasting location by ↔

Note

- You can also carry out paste by pressing and holding in the text entry screen.
- To undo character paste, press <u>—</u> [Function] and select "Undo".
- Copied or cut text string containing characters unavailable to enter cannot be pasted.
- If you have entered more characters than the maximum number of characters, only the number of characters allowed to be entered will be pasted.

Kuten Code

Using Kuten Code for Entry

You can enter 4-digit Kuten Code to enter Hiragana, Kanji, full-pitch Katakana, full-pitch numeric, full-pitch alphabetic, symbol, etc.

• For 4-digit Kuten Code, see "Kuten Code List" (P334).

Character entry screen (P296) ♦ [Function] ♦ "Entry Mode" ♦ "Kuten Code"



Kuten Code entry screen

Entering Kuten code

Related characters are entered.

• Repeat Step 1 to 2 to continue entering Kuten Codes.

New Word Dictionary

Registering Frequently Used Words

When frequently used words are registered in New Word Dictionary, they appear as conversion option when converting characters, allowing quick entry. New Word Dictionary allows to register up to 200 words.

● ► ₩₩ (Settings) ► "General Settings" ► "Text Entry" ► "New Word Dictionary"

■ To confirm selected word Select one of registered words and press ●, then New Word Dictionary detail screen opens and you can confirm registered contents.



screen

[New Entry]

Enter a word

 Up to 16 full-pitch/half-pitch characters can be entered.

Enter readings (Hiragana)

The word is registered.

• Up to 16 full-pitch characters can be entered.

Note

 Spaces entered in a word or reading will be automatically deleted when registered. Function Menu on New Word Dictionary Screen/ New Word Dictionary Detail Screen

New Word Dictionary screen (P302)/New Word Dictionary detail screen ♦ [Function] ♥ Perform the following operations

New Entry

Go to Step 3 (P302) in "Registering Frequently Used Words".

Edit

Modify a registered word. Go to Step 3 (P302) in "Registering Frequently Used Words".

Delete

[Yes]

Delete All

♦ 👍 [Yes]

Reset Learned Data

Initializing Learned Data

Reset the learned data saved on the FOMA handset and restore the default.

● ► 🔐 (Settings) ► "General Settings" ► "Text Entry" ► "Reset Learned Data" ► 🖃 [Yes] / 🗔 [No]

Learned Data

Download Dictionary

Using Downloaded Dictionaries

You can enable downloaded dictionaries from i-mode sites, etc. and set them usable for character conversion. Up to 5 dictionaries can be enabled.

- Up to 10 dictionaries can be stored in the FOMA handset.
- When multiple dictionaries are enabled, you can prioritize them used for conversion. →P303

● ◆ ↓ (Settings) ◆ "General Settings" ◆ "Text Entry" ◆ "Download Dictionary"

Download Dictionary] 略語一般辞書 □約市実田田語辞書 一学生用語辞書 ロビジネス用語辞書 □全国チェーン店名辞書 <empty> <empty> Download Dictionary screen Checkmark to a dictionary to enable The dictionary is enabled. To disable the dictionary Select a valid dictionary and press (•). Downloading dictionaries You can download dictionaries from the following site: http://motomobile.jp/

Function Menu on Downloaded Dictionary Screen

Rename

Modify name of a dictionary. Up to 10 full-pitch/half-pitch characters can be entered.

Modify a title

Details

Confirm detail information of the dictionary.

Priority

Set the priority for the dictionaries when you enable 2 or more dictionaries.

Select a dictionary → ▲ [Grab] → Move dictionary by () → ▲ [Insert] → [™] [Complete]

Delete

Delete a selected dictionary.

🕈 🖃 [Yes]

Delete All

Delete all dictionaries.

♦ 🖅 [Yes]

Overseas Use

Overview of International Roaming (WORLD WING)	306
Services Available Overseas	306
Checking before Using Overseas	307
Making Calls Overseas	309
Receiving Calls Overseas	312
Setting Network Searching/Setting Type <network setup=""></network>	313
Setting Telecommunication Carrier to be Connected by Priority	
	314
Emitting Notification Tone when Placed in Network Area <service tone=""></service>	315
Starting Roaming Guidance <roaming guidance=""></roaming>	315
Setting to Accept No Incoming Calls during Roaming	
	315
Using Network Services During Roaming	316

Overview of International Roaming (WORLD WING)

International roaming (WORLD WING) is a service that allows to talk or make communications over an affiliated overseas carrier's network using the same phone number as that used domestically.

For details of the services available during international roaming, refer to "DoCoMo WORLD SERVICE User's Guide". Also, in DoCoMo's "International service web site", you can see the latest information on international services and download the latest issue of "DoCoMo WORLD SERVICE User's Guide".

URL of DoCoMo's "international service web site" http://www.nttdocomo.co.jp/service/world/

Subscribing to WORLD WING

- If you subscribed to the FOMA service after September 1, 2005, a separate subscription is not required. However, if you did not subscribe at the time of your FOMA service subscription or have canceled this service, a separate subscription is required again.
- If you initially subscribed to the FOMA service before August 31, 2005 and have not subscribed to "WORLD WING", a separate subscription is required.

Services Available Overseas

Communication services available vary depending on overseas carriers and/or network used. For details of communication services available in international roaming, refer to "DoCoMo WORLD SERVICE User's Guide" or DoCoMo's web site. →P306

Communication Services Available

Services	Description
Voice Call	Using the same phone number as that used in Japan, you can make/ receive calls in a country you stay and make international calls to countries other than that you stay in.
Video Call	You can make Video Calls with users of specific 3G mobile telecommunication carriers overseas and FOMA users in Japan.

Services	Description				
i-mode	You can use i-mode to acquire information of Japan and the country you stay.				
i-mode mail	Using the same mail address as that used in Japan, you can send/ receive i-mode mail.				
i-Channel*1	You can download information periodically as in Japan.* ² You can also press the i-Channel assigned key to open a channel list and download detailed information.* ³				
SMS	You can send and receive SMS to/ from FOMA users in Japan and users of overseas telecommunication carriers other than DoCoMo.				
Data Communication	You can connect PC or other devices to use data communication (packet/circuit switching).				

*1: May not be available depending on the carrier or area.

- *2: Auto Update is suspended automatically if the handset is connected to an overseas carrier. To resume the automatic update of i-Channel overseas, you need to perform i-Channel settings again. However, a packet communication charges apply in addition to the monthly charge.
- *3: A packet communication charges apply for Auto Update of information on the "Basic Channel".

Difference in Communication Services among Networks

You need to set a network and a carrier in order to use the handset overseas. \rightarrow P313, P314

Service	3G	GSM	GPRS
Service		26	25
Voice Call	0	0	0
Video Call	0	\times^{\star}	\times^{\star}
i-mode	0	×	0
i-mode mail	0	×	0
SMS	0	0	0
i-Channel	0	×	0
Data Communication	0	×	0

○: Available.

 \times : Not available.

* : When a call is made, a redial confirmation screen opens. Select "Reconnect as Voice Call" to redial Voice Call.

Network for overseas

Network	Description
W-CDMA (3G)	W-CDMA is a third generation mobile communication network complying with 3GPP*1 global standards.
GSM*²	GSM is the second generation mobile communication network in digital communication system that is most widely used around the world.
GPRS* ³	GPRS is the 2.5 generation mobile communication system that enables high-speed packet communication using GSM.

- *1: Abbreviation of 3rd Generation Partnership Project. This is a regional standards organization for developing common technological specifications for the third generation mobile communication system (IMT-2000).
- *2: Abbreviation of Global System for Mobile Communications. GSM is one of the standards for mobile phones unified in Europe.
- *3: Abbreviation of General Packet Radio Service. This is a packet communication service that is widely spread in Europe.

Checking before Using Overseas

STEP1: Preparation before departure STEP2: Using overseas STEP3: Setting after returning to Japan

Preparation before Departure

Subscription

If you have not yet subscribed to WORLD WING (P306), make a subscription.

 Install UIM subscribed to WORLD WING to FOMA handset.

Communication services, etc. in countries and regions

For information such as countries, areas, telecommunication carriers available, visit DoCoMo's "international service web site". →P306

Battery charging

When charging the battery pack overseas, use the FOMA Overseas/Domestic AC Adapter 01 (optional). If the countries and/or regions you stay use outlets of different type, obtain applicable conversion plug adapters in electronics stores, overseas travel good stores, etc.

- Do not charge the battery pack using a transformer for overseas travel.
- Precautions about handling of AC adapter →P43

Charging →P44

Using i-mode

You have to make "International Settings" in advance. Select "i Menu" and select "ENGLISH" → "Options" → "International Settings" to display setup screen.

Setting network services

You can activate or deactivate the subscribed network services from overseas. The following network services can be accessed:

- Caller ID Notification Service^{*1*2}
- Voicemail Service^{*1*3}
- Call Forwarding Service^{*1*3}
- Caller ID Request Service*1
- Call Waiting Service^{*1}
- English Announcement Service^{*1}
- Nuisance Call Barring Service^{*1}
- Roaming Guidance setting^{*1}
- Call Barring Roaming
- *1: May not be activated in some service areas.
- *2: Caller ID may not be sent correctly or not be sent at all.
- *3: To operate from overseas, you need to set the Remote Control (P285) while in Japan in advance.
- Convenient functions and services available overseas

Functions and services	Description
Roaming Guidance Intl	The other party is notified with a voice guidance that you are in international roaming.
Call Barring - Roaming	Reject reception during international roaming.
Calculator	You can set Calculator Exchange Rate for currency conversion.
World Clock	You can confirm the date and time in 3 countries/regions at the same time.
Electronic Dictionaries	You can look up words and phrases using English-Japanese and Japanese-English dictionaries.

You are recommended to read the following booklets with this manual:

Title	Description
Mobile Phone	Describes how to use i-mode
User's Guide	and i-mode mail overseas and
[i-mode]	their fees, etc.
DoCoMo WORLD SERVICE User's Guide	Describes details of international roaming service including contents of the service, usage fee, precautions.
Mobile Phone	Describes contents, settings,
User's Guide	precautions, etc., of the network
[Network services]	services.

Continued on the next page ••• 307

Billing of charges

Overseas charges are billed with your monthly charge. Note that they may appear on a billing invoice of the next month or later due to the situation of the operator of your country of stay. Also note that the billing invoice for charges in the same charging period may be sent to you in a different month.

Note

 This manual contains quick manual "Overseas Use" that can be used conveniently for referencing operations. Please reference it when using FOMA handset overseas.

Overseas Use

Network switching

"Network Setup" is set to "Automatic" by default. When you use the FOMA handset in Japan or in the areas where 3G area network is available, it is recommended to switch "Band" to "3G" to reduce the consumption of the battery pack. → P313

To switch networks manually →P313

Display on screen

An icon indicating the connected network is displayed so that you can view the available communication services (P306). The connected carrier name also



appears on the Display.

1 Icons indicating the connected network

- E : Connected to a FOMA network in Japan
- Est : Connected to a 3G network overseas
- Connected to a GSM network overseas
- 🔆 : Connected to a GPRS network overseas
- Connected carrier name

Setting the time for Schedule events/Tasks If you set "Auto Update" under "Time and Date" to "ON (Time and time zone)", when the time is updated, the set times for saved schedule events/ tasks are automatically adjusted. If you saved overseas schedule events/tasks while in Japan, you need to modify schedule events/tasks after the time was updated in accord with the local time

When Your Mobile Phone Is Lost or Stolen, etc. While Overseas

<DoCoMo Information Center> (24-hour service)

Universal Number

International Prefix number for the universal number (Table 1)

- -800-0120-0151
- * Domestic call charges for your overseas location will apply to calls made from your handset.
- * Universal Numbers are often unavailable from a mobile phone, public phone, or a phone in a hotel.
- If the above Universal Number is not available International call access code of your country of stay (Table 2)
 - -81-3-5366-3114
 - * Communication charges to Japan will apply.

For loss or theft of the handset, settlement of charges, or handset failure while overseas, refer to "For loss or theft of the handset or charges while overseas" or "For a handset failure while overseas" on the back of this manual. Call and communication charges accrued after the handset was lost or stolen are still applied to you.

When Your Mobile Phone is Not Working Properly

<Network Technical Operation Center> (24-hour service)

Universal Number

International Prefix number for the universal number (Table 1)

- -800-5931-8600
- * Domestic call charges for your overseas location will apply to calls made from your handset.
- * Universal Numbers are often unavailable from a mobile phone, public phone, or a phone in a hotel.

If the above Universal Number is not available:

International call access code of your country of stay (Table 2)

- -81-3-6718-1414
- * Communication charges to Japan will apply.

International phone code for universal numbers (Table 1)

Area	Code
Argentina	00
Australia	0011
Austria	00
Belgium	00
Brazil	0021
Canada	011
China	00
Columbia	009
Denmark	00

Area	Code
Luxemburg	00
Malaysia	00
Netherlands	00
New Zealand	00
Norway	00
Philippines	00
Singapore	001
South Korea	001
Spain	00

Checking before Using

Overseas

Overseas Use

Area	Code
Finland	990
France	00
Germany	00
Hong Kong	001
Ireland	00
Israel	014
Italy	00

00
00
00
001
00
011

* Codes may be changed.

* For other Country Codes and details, visit DoCoMo's "international service web site". →P306

Area	Code		Area	Code
Australia	0011		Macao	00
Belgium	00		Malaysia	00
Brazil	0041		Monaco	00
	0021		Netherlands	00
	0023		New Zealand	00
Canada	011		Norway	00
China	00		Philippines	00
Czech	00		Poland	00
Denmark	00		Portugal	00
Finland	00		Russia	810
	990		Singapore	001
France	00		South Korea	001
Germany	00		Spain	00
Greece	00		Sweden	00
Hong Kong	001		Switzerland	00
Hungary	00		Taiwan	002
India	00		Thailand	001
Indonesia	001		Turkey	00
Ireland	00		U.A.E.	00
Italy	00		U.K.	00
Luxemburg	00		U.S.A.	011
			Vietnam	00

Major international access code (Table 2)

Codes may be changed.

* For other Country Codes and details, visit DoCoMo's "international service web site". →P306

Setting after Returning to Japan

When you have returned to Japan, FOMA handset is automatically connected to FOMA network and 🖁 appears at the top of the screen.

 When FOMA network is not connected, check whether "Band" of "Network Setup" is set to "Automatic" and "NW Search Mode" is "Automatic".

Making Calls Overseas

When you and other parties you are going to make a call to are using a telecommunication carrier applicable to FOMA Video Calls, international Video Calls are also available.

- For information such as countries/areas, telecommunication carriers available, visit DoCoMo's "international service web site". →P306
- Depending on the handset connected via an international Video Call, the other party's image displayed on FOMA handset may be unclear or connection may be disabled.

Making an International Call (Including to Japan)

Make a call prefixing "+" and a country code to a other party's phone number.

- "+" can be entered by pressing and holding <u>0</u>, for 1+ seconds.
- · Japan's Country Code is "81".

 • Other
 (for 1+ seconds) ◆ Enter "Country

 code - Area code - other party's phone

 number"

- When an Area code begins with "0", omit it (some countries and/or regions including Italy require "0").
- When making a call to a mobile phone or PHS in Japan, also omit leading "0".
- Country code →P310



Making Video Call Press .

Making a Call Easily to Japan

If a call is made using an entry in Dialed or Received Calls or the Phonebook in which a phone number with a leading "0" is recorded/ registered, leading "0" is automatically replaced with "+ Country code (+81)".

 "+81" (Country Code of Japan) is set to be added automatically by default. →P311

Continued on the next page •••

Display an entry in history/Phonebook

Using Dialed Calls

Open the Dialed calls list screen (P54)/Dialed calls detail screen (P55).

Using Received Calls

Open the Received calls list screen (P66)/ Received calls detail screen (P66).

Using the Phonebook

Open the Phonebook list screen (P102)/ Phonebook detail screen (P103).

Select an entry in history/Phonebook 🕨 ତେ / 📖

When multiple phone numbers are saved in a Phonebook entry on the Phonebook list screen

Press O to display the phone number to call and press O/M.

When multiple phone numbers are saved in a Phonebook entry on the Phonebook detail screen

Press $\langle D \rangle$ to display the phone number to call

and press $\sqrt[1]{2}$



 Dialing confirmation screen shows a phone number prefixed with "+ Country code". The phone will dial: +81XXXXXXXX Continue?

Making Video Call Press 🛒.

Dialing confirmation screen

🖃 [Call]

 Ioriginal No]: Make a call without converting "0" into "+ Country Code".

Note

Δ

- This is available only out of the service area (during international roaming).
- "0" will not be converted into "+ Country Code" when:
 - Entering a phone number with the leading "0"entered directly using Dial Keys
 - "+" is entered at the beginning of the phone number

Making an International Call (Including to Japan) Selecting Registered Country Code

From function menu, you can select and add Country Code to an entered phone number.

Enter "Area code - other party's phone number"

The Country code screen opens.

Select a Country code

"+ Country Code" is added to the beginning of an entered phone number.

• When an entered phone number begins with "0", it is deleted and "+ Country Code" is added.



Making Video Call Press .

Note

- Country Codes of 55 countries are registered by default. Country Codes can be added. →P311
- On the Country code screen, by pressing <u>ove</u> to <u>mag</u>, you can find a country code of a country whose name starts with the letter (half-pitch Katakana or alphanumeric character only) assigned to the Dial Keys. For example, press <u>mag</u> three times to find a country code of a country whose name starts with "ス (su)". When "Language" is set to "English", by pressing <u>te</u> to <u>mag</u>, you can find a country code of a country whose name starts with the letter (half-pitch Katakana, alphanumeric characters, or symbol only) assigned to the Dial Keys. For example, press <u>mag</u> once to find a country code of a country whose name starts with "J".

Area	Code		Area	Cod
Australia	61		Maldives	960
Austria	43		Netherlands	31
Belgium	32		New Caledonia	687
Brazil	55		New Zealand	64
Canada	1		Norway	47
China	86		Peru	51
Czech	420		Philippines	63
Egypt	20		Russia	7
Fiji	679		Singapore	65
Finland	358		South Korea	82
France	33		Spain	34
Germany	49		Sweden	46
Greece	30		Switzerland	41
Hong Kong	852		Tahiti	689
Hungary	36		Taiwan	886
India	91		Thailand	66

Major Country Codes

Area	Code
Indonesia	62
Italy	39
Japan	81
Масао	853
Malaysia	60

Area	Code
Turkey	90
U.K.	44
U.S.A.	1
Vietnam	84

* Codes may be changed.

* For other Country Codes and details, visit DoCoMo's "international service web site". →P306

Making Call inside the Country Where You Stay

Make a call by dialing a receiver's phone number from Area Code (Toll Number).

- If the other party you are calling is in the middle of international roaming, make a call in the same way as described in "Making a call to a country outside your country of stay (including Japan)" even in the same country/region.
- When "Auto Assist" in "Auto-Assist Settings" under "Country Code" is set to "On", the Dialing confirmation screen (P310) opens if a call is made to a phone number whose area code (city code) starts with "0" from Phonebook or Dialed/Received Calls list. In this case, press F. [Original No] to make the call.

The "International video call" can be used by pressing after the international call dialing procedure to make a call if you and the other party you are making a video call to use operators supporting the FOMA video-phone.

- Visit DoCoMo's web site for information about accessible countries and operators, etc.
- The other party's image displayed on the FOMA handset may be disordered or you may not be able to be connected depending on the handset of the other party you are making an international video call to.

Setting to Simply Make a Call

Setting Auto Assist of Country Code

Default Auto Assist: On Country Code: ニホン (Japan) (81)

Set whether to automatically replace leading "0", if entered, of a phone number with "+ Country Code" during international roaming. Also, you can specify Country Code to be automatically added. ● ► ↓↓↓ (Settings) ► "In-Call Setup" ► "Intl Dial Settings" ► "Country Code" ► "Auto-Assist Settings" ► Perform the following operations

Auto Assist

"On"/"Off"

Country Code

Registering Country Code



Up to 60 Country Codes can be registered. You can edit a default country code.

● ♦ ₩ (Settings) ♦ "In-Call Setup" ♦ "Intl Dial Settings " ♦ "Country Code" ♦

"Country Code List"

アイルラント	353
ፖメリカ	1
777	971
アルセッンチン	54
<u> </u>	44
17JIN	972
1997	39

List screen

2 "New" Perform the following operations

Name

Register a name of Country Code. Up to 16 full-pitch/halfpitch characters can be entered.

Enter a name

Country Code

Register up to 4 digits.

Enter Country Code

김 🖅 [Complete]

Note

Country Code

- - Select "Insert" ▶ "Pause", "Wait", or "n" to enter "p", "w" or "n" in the order after the entered country code. →P57
 - Select "Editing Function" to edit the characters.
 →P298
 - Select "Cancel Entry" to cancel saving.

Making Calls Overseas

Continued on the next page •••

you can find a country code of a country whose name starts with the letter (half-pitch Katakana or alphanumeric character only) assigned to the Dial Keys. For example, press 3 three times to find a country code of a country whose name starts with "ス (su)". When "Language" is set to "English". by pressing to way, you can find a country code of a country whose name starts with the letter (halfpitch Katakana, alphanumeric character, or symbol only) assigned to the Dial Keys. For example, press once to find a country code of a country whose name starts with "J".

Function Menu on Country Code List Screen

Country Code List screen (P311) 🕨 🖅 [Function] Perform the following operations

Edit

Modify selected Country Code. Go to Step 2 (P311) in "Registering Country Code".

Delete

Delete selected Country Code.

New

Go to Step 2 (P311) in "Registering Country Code".

Note

Edit

· You can also edit a pre-registered country code.

Delete

 You cannot delete the country code set as "Country" Code" in "Auto-Assist Settings".

Receiving Calls Overseas

There is an incoming call

Ring tone sounds.

- / .: Stop ring tone and/or vibration
- Private Calling Incoming Voice Call...
- Place the call on response hold. →P68

Incoming call screen

(☉)/ 🗔 [Answer]

Answer the call.

To answer a video call using the Camera image Press .

To answer a video call using the alternate image

Press [Use Image].

When talking is over, Top

Note

- · In some countries or regions, you may be charged also for incoming calls. In that case, you are charged for both the international forwarding and reception fees
- No or different caller ID may be notified for some telecommunication carriers used.
- · When there is an incoming call during international roaming, international forwarding from Japan occurs. The caller is charged for the call fee to Japan and the receiver is charged for international forwarding fee.
- When the Public Mode (Drive Mode) is activated. incoming call actions including sounding the ringtone and blinking the Illumination Indicator will not take place. Also, if a call arrives when the display is turned off, the display will not light.

Making call to your FOMA handset from Japan

You can be called at your phone number in the same way as when you are in Japan.

Making call to your FOMA handset from overseas

You are called via Japan regardless of the place you stay. Similarly to making an international call to Japan, you can be called in the way described helow

Making a call by entering "International Access Code*1 of originating country - 81*2 - your phone number with leading "0" omitted*3"

- *1: When dialing to a mobile phone, you may be able to dial by entering "+" instead of the International Access Code.
- *2: Enter Country Code of Japan.
- *3: Enter "90-XXXX-XXXX" when the number begins with "090" or "80-XXXX-XXXX" when it begins with "080".

When a Call is Interrupted

A Call Cannot Be Made or Received/Stays Out of the Service Area/Power Cannot be Turned On

If a call cannot be made or received, the radio wave reception level stays out of the service area, or power cannot be turned on, the following situation is supposed;

Weak radio wave reception level or out of the service area

Receiving Calls Overseas

Overseas Use

- Malfunction of the local switchboard or the base station, or temporary circuit congestion
- · Wrong operation of the FOMA handset
- Others

Visit the DoCoMo's "international web site" for the latest area and interruption information, etc. →P306

Upon confirming the operation method, try the following;

- If you are indoor, check to see if the condition is the same outdoor, too.
- Check to see if your monthly charge does not exceed the credit limit.
- Turn on the power again.
- Manually select the operator to connect. →P313

Contact the Network Technical Operation Center on the back of this manual if the condition does not recover after checking the above.

Credit Limit (Service Suspension Standard)

- The credit limit is provided for WORLD WING. If we have confirmed that your monthly charge has exceeded the credit limit, this service will be suspended until the end of the corresponding month.
- The accumulated charge is the amount before applying free communications fee.
- The Credit limit includes call/communication charges and received call charges for overseas roaming, digital communications charges such as video calls and received call charge, packet communication charges and SMS communication charges. Note that since the international forwarding charge and any charge whose data have not been received by us from the operator of your country of stay are not included, the billing amount may exceed the credit limit. In that case, you must pay your monthly charge for this service used before suspended.
- When payment of your monthly charge is confirmed, suspension of the WORLD WING service will be lifted (After the payment, it may take a while before the suspension of the service is lifted). You can make a payment by credit card settlement (Once payment only) from overseas.
- Contact DoCoMo Information Center on the back of this manual for details.


Network Setup

Setting Network Searching/ Setting Type

Default

Band: Auto NW Search Mode: Automatic Search Speed: Medium

Operations of FOMA handset for searching or setting network can be set. You can specify a communication type of network to be searched and set whether to automatically or manually make settings of a detected network. Also, frequency of network search can be set. "Network Setup" is set to "Automatic" by default. When you use the FOMA handset in Japan or in the areas where 3G area network is available, it is recommended to switch "Band" to "3G" to reduce the consumption of the battery pack.



Network Setup Band: Automatic NW Search Mode: <u>Autom.</u> Search Speed: <u>Medium</u> Network Setup

screen

Perform the following operations

Band

Specify network to be searched.

· Identify the communication systems available in your	
overseas location before setting. →P306	

Automatic	:	Detect all networks available regardless of communication types.
GSM 1900	:	Search only GSM networks with 1900MHz frequency band.
GSM 900/1800	:	Search only GSM networks with 900/ 1800MHz frequency band.

3G : Search only 3G networks.

NW Search Mode

After "New Network" is performed, select how to set up the found network.

Automatic : Automatically set a detected network.

Manual : Manually set a detected network.

Speed

Select search frequency Select]

🚹 🖅 [Complete]

Network search starts, and the found network is set up.

When "Network Search Mode" is set to "Manual"

Select a network from the Manual list screen and press 👍 [Register].

Note

- After coming back to Japan and if the icon indicating the network status remains out of the service area, set "Band" to "Automatic" or "3G" and "NW Search" to "Automatic".
- Even if "Network Search Mode" is set to "Manual", the Manual list screen may not open depending on radio wave reception level or network search conditions.

Searching Again Network to be Connected

You can search again network and switch it when network automatic searching and/or setting is not appropriately carried out or when you want to use another telecommunication carrier's network.

Network screen (P313) > "New Network"

Start network searching.

- When "NW Search Mode" of "Network Setup" is set to "Automatic", an appropriate network, when detected, is automatically set.
- When "NW Search Mode" of "Network Setup" is set to "Manual", manual list screen is displayed, when detected. Go to Step 2.

Select network 🕨 🖅 [Register]

The selected network is set.

Confirming network code

Select a network and press (•). Press (•) on the network code display screen to set the network

Network detail screen opens allowing to confirm network code.

Note

- When an appropriate network is not connected, change "NW Search Mode" of "Network Setup" to "Manual", search network again and manually select target network.
- On network code display screen, press <u>h</u>
 [Function] and select "Copy All" to copy all character information on network code display screen.

My Network List

Setting Telecommunication Carrier to be Connected by Priority

You can register Up to 20 networks to be searched and set by priority by FOMA handset.

● ♦ ∰ (Settings) ♦ "Network" ♦ "My Network List"

The My Network List opens.

• Networks with high priority levels appear in the upper part of the list.

Confirming details of network Select a network and press (•). Network detail screen opens allowing to confirm network code and priority.

"[Add Network]"

The Network ID screen opens.

■ To add a network specifying the priority Specify the position of the network to be added in the list, press → [Function] and select "Insert".

Enter network code

The added network appears at the bottom of the list.

• If a network was added specifying the priority, the network is added above the selected network.

Note

- Depending on the signal reception, a network that is not registered may get connected.
- The following operations can be performed by pressing + [Function] on the network ID screen:
 - Select "Editing Function" to edit the characters. \rightarrow P298
 - Select "Cancel Entry" to cancel saving.

Function Menu on My Network List Screen/ Network Detail Screen

My Network List screen/Network detail screen ♦ → [Function] ♦ Perform the following operations

Insert

Register and insert a network, above a selected network. Go to Step 3 (P314) in "Setting Telecommunication Carrier to be Connected by Priority".

Edit

Modify selected network. Go to Step 3 (P314) in "Setting Telecommunication Carrier to be Connected by Priority".

Delete

Delete a selected network.

Copy All Text

Copy all text data on the network detail screen.

Searching and Registering Telecommunication Carriers Available

You can search networks available in a country or region you are using FOMA handset, switch to detected networks and add My Network List.

💿 🕨 🏧 (Settings) 🕈 "Network" 🕨

"Available Networks"

Network searching starts and a list of detected networks appear.

Confirming details of network code Select a network and press (•). Press (•) on the network code display screen to switch the network.

Function] 🕨 "Register Now"/"Add to List"

- · Select "Register Now" to switch the selected network to My Network List.
- · Select "Add to List" to register the network to Avail. Networks.

Note

- The following operations can be performed by pressing [] [Function] on the Network code display screen:
 - Select "Add to List" to register as an available Networks
 - Select "Copy All Text" to copy all text data on the Network code display screen.

Service Tone

Emitting Notification Tone when Placed in Network Area

Default Off

You can set so that, when you moves inside a network area from outside, you are notified of it with a notification tone.

(Settings) "Network" "Service Tone"
 "On"/"Off"

Roaming Guidance

Starting Roaming Guidance

Before you leave Japan, you can set so that the other party who makes a call to you during international roaming will be notified of it with a voice quidance.

- While 圈外 is displayed, operations for setting Roaming Guidance are disabled.
- · You can also operate Roaming Guidance settings overseas. →P316

(•) • 🐰 (Network Services) • "Roaming Guidance" Perform the following operations

Activate

▶ ▲ [Yes]

Deactivate

▶ ▲ [Yes]

Status Request

Confirm the current settings.

Roaming Guidance Intl

Operate Roaming Guidance overseas. →P316

Note

- · When this option is deactivated, a call tone set by the overseas carrier sounds.
- · Some overseas carriers may not offer this option.
- Even if you activated this option, a voice guidance in a foreign language may be played due to the overseas carrier's services

Call Barring - Roaming

Setting to Accept No **Incoming Calls during** Roaming

You can set so that incoming calls, mails, etc., are all restricted during roaming. You can also set to restrict only incoming Video Calls.

(•) • 🖹 (Network Services) • "Call Barring - Roaming" Perform the following operations

Activate - All Calls

Restrict all incoming calls.

[Yes] Enter the Network Security Code

Activate - Data Only

Restrict only incoming Video Calls. (Only inside the 3G network service area)

IYes] Enter the Network Security Code

Deactivate

[Yes] Enter the Network Security Code

Status Request

Confirm the current settings.

Note

· Some overseas carriers do not offer this option.

Using Network Services During Roaming

You can use network services of Voicemail service, Call Forwarding service and Roaming Guidance settings overseas.

- In order to use Voicemail and/or Call Forwarding service, you have to subscribe to the network service(s) and set "Remote Control" to activate in advance in Japan. →P285
- You will be charged for international call fee of the country you stay when these services are operated from the country where you stay to Japan.
- These services may not be operable in some countries.

Voicemail Intl

Operating Voicemail Service Overseas

You can set to activate/deactivate Voicemail service overseas. You can also replay recorded messages and change the settings following a voice guidance.

• While 圏外 is displayed, operations of Voicemail Intl are disabled.

● ▶ X (Network Services) ▶ "Voicemail" ▶ "Voicemail Intl"

Perform the following operations

Play Messages

Replay a message.

Activate

Set to activate Voicemail service.

Deactivate

Set to deactivate Voicemail service.

Voicemail Settings

Change the settings following a voice guidance.

Operate according to voice guidance

Note

 To use this service outside the service area at your overseas location, you need to switch off the handset where signals can be received.

Call Forwarding Intl

Operating Call Forwarding Service Overseas

You can set to activate/deactivate Call Forwarding service overseas.

- While 圏外 is displayed, operations of Call Forwarding service are disabled.
- ▶ X (Network Services) ▶ "Call Forwarding" ▶ "Call Forwarding Intl"
- Perform the following operations

Activate

Set to activate Call Forwarding service.

Deactivate

Set to deactivate Call Forwarding service.

Operate according to voice guidance

Note

 To use this service outside the service area at your overseas location, you need to switch off the handset where signals can be received.

Roaming Guidance Intl

Operating Roaming Guidance Overseas

You can set to activate/deactivate Roaming Guidance overseas.

• While 圈外 is displayed, operations for Roaming Guidance Intl are disabled.

● ▶ 🔏 (Network Services) ▶ "Roaming Guidance" ▶ "Roaming Guidance Intl"

Operate according to voice guidance

Appendix/Using External Devices/Troubleshooting

Menu List	318
Default Settings	325
Dial Keys Assignments to Characters	328
List of Symbols and Special Characters	329
Pictograph (E-Moji) List	331
Emoticon List	332
List of Common Phrases	333
Kuten Code List	334
Combinations of Multiaccess Functions	338
Combinations of Multitask Functions	339
Services Available from FOMA Handset	339
Options and Related Devices	340
Interfacing to External Devices	
Data Link Software	340
Video Play Software	341
Troubleshooting	
Troubleshooting	341
Error Messages	343
Warranty and After-sales Service	356
Updating Software	357
Protecting Mobile Phone from Dangerous Data	
<scanning function=""></scanning>	361
Major Specifications	364
Maximum Number of Savable/Protectable in the FOMA Handset	365
Authentication	366
Export Administration of This Product and Its Accessories	368

Menu List

Functions with indicated in "Default settings:" field are those initialized to default settings by performing "Master Reset". →P277

	Funct	ion names	Default settings	Reference	
0.000	iMenu		-	P160	
i-mode	Bookmark				
		Main folder	Unregistered	P164	
		User-created folder	None		
	Go to location	URL entry history	No history	P163	
	Screen memo				
		Main folder	Unregistered	P165	
		User-created folder	None		
	Last URL			P163	
	MessageR		No messageR	D470	
	MessageF		No messageF	P172	
	Check new message		-	P172	
	i-mode setting				
		Font size	i-mode: Standard Message: Standard	P170	
		Scroll	1 line	P170	
		Image display	Display	P170	
		Message auto-display	MessageR preferred	P172	
		Message att. melody	Auto play	P172	
		i-motion auto play	Auto play	P177	
		Use registered data	Use	P170	
		Sound effect	Play	P170	
		Check new message	All checkmarked	P201	
		Connection timeout	60 seconds	P170	
		Host setting	i-mode(FOMA Card)	P170	
		Certif. Center host	DoCoMo	P175	
		Certificate	All valid	P174	
		Client certificate	_	P170	
		Check i-mode setting	-	P170	
		Reset i-mode	_	P170	
	SWAP		-	P161	
₽ i-appli			Only pre-installed i-appli	P211	
\ge	Inbox				
Mail		Main folder	No messages	P194	
		User-created folder	None	P194	
		Folder for i-appli mail	None		

	Functi	on names	Default settings	Reference
\ge	Outbox			
Mail		Main folder	No messages	Dioi
		User-created folder	None	P194
		Folder for i-appli mail	None	
	Unsentbox	Main folder	No messages	P194
	Compose message		-	P184
	Compose SMS message		-	P206
	ChatMail		ME	P205
	Deco-mail template		Only pre-installed data	P188
	SWAP		_	P184
	Check new message		-	P191
	Check SMS		_	P207
	Receive option		_	P191
	Mail setting			
		Check new message	All checkmarked	P201
		Receive attachment	Image and melody	P201
		Receive option	OFF	P201
		Melody auto play	Auto Play	P201
		Receive preference	Prefer receive notice	P201
		Signature	OFF	P203
		Edit quotation mark	> (Quotation mark)	P202
		Font size	Standard	P202
		Scroll	1 line	P202
		Reg. sending group	Unregistered	P202
		SMS report request	OFF	P202
		SMS message validity	For 3 days	P202
		SMS Center	DoCoMo	P202
		Mail status request		P202
		Reset mail		P202
Phonebook			_	P92
	My Pictures			
Databox		Pictures (All)	Only pre-installed file	
		Camera	None	_
		i-mode/Other	None	P226
		Pre-installed	Only pre-installed file	
		Picture Albums	Most Viewed folder User-created album: None	P237
	i-motion			
		i-motion (All)	Only pre-installed file	
		Camera	None	P233
		i-mode/Other	None	

	Funct	Function names		Reference	
Q	i-motion	Pre-installed	Only pre-installed file	P233	
Databox		i-motion Albums	Most Viewed folder No user-created album	P237	
	Melody				
		Melody (All)	Only pre-installed file		
		i-mode/Other	None	P240	
		Pre-installed	Only pre-installed file		
		Playlists	Most Played list No user-created list	P244	
	Chara-den				
		Chara-den (All)	Only pre-installed file		
		i-mode/Other	None	P239	
		Pre-installed	Only pre-installed file	-	
	Animations				
		Animations (All)	None		
		i-mode/Other	None	P226	
		Pre-installed	None		
	Voice Notes				
		Voice Notes (All)	None	D045	
		My Notes	Unregistered	P245	
6	Alarm Clock		Unregistered	P259	
Accessories	Datebook		Unregistered*1	P261	
	Record Message		-	P74	
	Calculator		-	P269	
	World Clock		Tokyo, London, and New York (from the top)	P269	
	Barcode Reader		-	P151	
	Electronic Dictionary		-	P270	
	Recent Calls				
		Received Calls	None	P66	
		Dialed Calls	None	P54	
		Notepad	None	P56	
		Call Times	00:00:00 for all*2	P266	
		Call Cost	0.00*3	P267	
	Camera		_	P145	
	Signature (Infrared Link)		-	P252	
Connection	(Bluetooth Link)	Audio Devices	Unregistered	P274	
		Device History	Unregistered	P275	

*1: Some pre-registered holidays (before the current day) may be deleted by "Master Reset".

^{*2:} With the UIM card inserted in another FOMA handset, "Lifetime" shows the duration from the time of purchase until now.

^{*3:} With the UIM card inserted in another FOMA handset, "Lifetime" shows the call cost from the time of reset of All Costs until now.

	Function	on names	Default settings	Reference
Connection	(Bluetooth Link)	Setup	Bluetooth Power: Off Name: FOMA M702iG	P273
	Give Setting)	Default Connection	Communication mode	P251
A	Voicemail		_	P280
Network Services	Call Waiting		-	P281
00110000	Call Forwarding		-	P282
	Nuisance Call Barring		_	P283
	Caller ID Notification		-	P284
	Caller ID Request		_	P49
	Incoming Call Setting		_	P285
	Incoming Call Mgmt		Answer Call	P285
	Additional Msg		_	P288
	Additional Service		-	P287
	Remote Control		_	P285
	Guidance Language		-	P284
	Dual Network		-	P284
	Multi Number		_	P286
	Call Barring - Roaming		-	P315
	Roaming Guidance		-	P315
	Service Dial		_	P285
10) 10)	Sound Profiles			
Settings		Profile	Sound Style 1	P112
		Sound Style 1 Detail	Ring Volume: 5 Voice Calls: 05.Solar Video Calls: 19.Bells Mail: 21.Triads Voicemail: 08.Fusion Message R: 20.Standard Message F: 20.Standard Calendar Alarm: 19.Bells Data Calls: 20.Standard File Transfer: Silent Chat Mail: 20.Standard Ringer IDs: On Key Volume: 2 Reminders: Beep	P113
		Ring Lights	Nocturne	P123
		Event Lights	Off	P124
	Personalize			
		Home Screen	Clock: Digital Date: On Layout: Centered	P124

Menu List

	Funct	ion names	Default settings	Reference
Settings	Personalize	Main Menu	View: Icons Reorder: i-mode, i-appli, Mail, Phonebook, Databox, Accessories, Connection, Network Services, and Settings (from the top on the list view)	P121
		Skin	Scorpio	P122
		Greeting	Unregistered	P122
		Wallpaper	Picture: 66.Liquid Layout: Fit-to-screen Calendar: Off	P120
		Screen Saver	Picture: None Delay: 1 minute	P123
		Manner Mode	Mode: Manner Mode	P117
	General Settings			
		Time and Date	Time Zone: Tokyo (GMT+9:0)*1 Date Format: 12/31/99 Auto Update: ON (Time only)	P48
		Speed Dial	Phone Memory	P110
		Display Timeout	2 minutes	P125
		Backlight	10 seconds	P125
		Charging Lights	On	P126
		Scroll	Wrap Around	P126
		Text Marquee	Slow	P126
		Language	日本語 (Japanese)	P48
		Text Entry	New Word Dictionary: Unregistered Download Dictionary: None Edit Common Phrase: Available only for the pre-installed	P300, P302
		Brightness	3	P126
		DTMF	Long	P116
		Master Reset	_	P277
		Master Clear	-	P277
	In-Call Setup			
		Date and Time	Show Date: On Show Time: On	P124
		In-Call Timer	Display: Time Beep: Off	P62

*: Performing Master Reset does not restore "Time Zone" to its default setting.

	Function names		Default settings	Reference
Settings	In-Call Setup	Call Cost Setup	Credit Limit: Off Currency Setup* Currency: YEN Per Unit: 1.000	P267
		Videocall Settings	Alternate Image: bunbun (Dimo) SpeakerPhone: On	P87, P90
		Answer Options	Multi-Key: Off Open To Answer: Off	P65
		Call Hold Setup	Voicecall Answer Hold Tone: Japanese Videocall Answer Hold Answer Hold Tone: Japanese Answer Hold Image: ah_img Videocall Hold Image: Melody1 Videocall Hold Image: ch_img	P69, P89
		Call Rejection	Public Phones: Accept Private ID: Accept Unknown ID: Accept Not in Phonebook: Accept	P137
		Intl Dial Settings	Intl Access Code Auto-Assist Settings (Auto Assist: On, Access Code: WORLD CALL) IDD Prefix Settings: WORLD CALL Country Code Auto-Assist Settings (Auto Assist: On, Country Code: 二木ン (Japan) Country Code List: 55 Country Code shave been stored	P60, P310
		Sub Address	On	P61
		Ring Delay	Ring Delay: 0 seconds	P138
	Network			
		New Network	_	P314
		Network Setup	Band: Automatic NW Search Mode: Automatic Search Speed: Medium	P313
		Available Networks	_	P315
		My Network List	Unregistered	P314
		Service Tone	Off	P315

Menu List

*: Performing Master Reset does not restore "Currency Setup" to its default setting.

	Func	tion names	Default settings	Reference
10	i-appli Settings			
Settings		Sort by	Name	P218
		Auto-start	On	P216
		Softw. info display	Off	P218
		Light	Phone Settings	P218
		Vibrate	Software Settings	P218
		Start failure history	Unregistered	P218
		Abnormal exit history	Unregistered	P218
		Security error history	Unregistered	P218
		Trace Output	Unregistered	P218
	Security			
		Phone Lock	Automatic Lock: Off	P131
		Sidekey Lock	Off	P136
		Sidekey Shortcut	-	P136
		Lock Application	Off	P133
		Lock Application Setup	All uncheckmarked	P133
		Secret Data	Hide	P136
		Dialing Restriction	Off	P135
		UIM PIN	_*	P130
		UIM PIN2	On	P130
		New Passwords	Unlock Code(4): 0000 Security Code(6): 000000 UIM PIN: 0000 UIM PIN2: 0000	P130, P130
	Headset			
		Auto Answer	Off	P272
		Ringer Options	Headset & Speaker	P117
	Self Mode			
		Self Mode	Off	P132
		Prompt At Power Up	Off	P133
	Phone Status			
		My Personal Info	Unregistered	P265
		Credit Available	-	P268
		Battery Meter	-	P46
		Storage Devices	-	P276
	Scanning Function	Scanning Function Settings	Scan: Enable	P361
	Software Update		-	P357

*: The default settings vary depending on the information saved on the UIM.

Default Settings

Data other than Deco-mail templates cannot be deleted.

Wallpaper Screen





51.Batwing







58.Catching Air

64.Higherplane



65.Landmark

53.Abstract

59.Desert



54.Bamboo



60.Fightnight





55.Beats



61.Flare



67.Spiral





62.Flowers





63.Grooving

Screen Saver



68.Moto





74.Rose



70.Essence





71.Grooving



72.Hip Hop





i-motion



Media Street

Scene




Tech Move On Up





Skin

· When a Skin is changed, it is automatically set as the image for the Wallpaper screen. It cannot be viewed from the Databox.

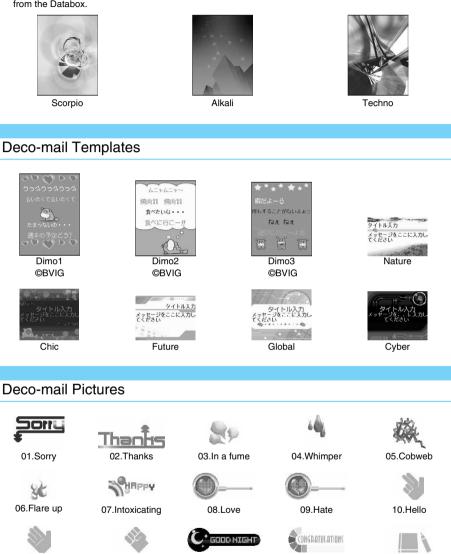

15.Study



20.Party



13.Good night



14.Congratulations

20

19.Dinner

24.Lonely

18.Good night



12.Come on!

17.Bathing

22.Amazing

20 Θ_

23.Discouraging

Appendix/Using External Devices/Troubleshooting

11.Bye-bye

16.Eating

21.Driving

26.Cold	27.SORRY · · · (blue)	28.THANK YOU !! (Orange)	29.Dislike	30.What?
Q _ 20	HELLO	Вле	ng bag	
31.Phew	32.HELLO	33.BYE	34.Нарру	35.Fight!
		Message	nail •• >	-#40-#10-#42-#45-#14-141
36.Happy birthday	37.Line 1	38.Line 2	39.Line 3	40.Line 4
S		(Charles and the second	S.	E.S
41.おどろき (Surprised) ©BVIG	42.ラブラブ (Love Love) ©BVIG	43.ごめんなさい (Sorry) ©BVIG	44.ねむる (Sleep) ©BVIG	45.悲しい (Sad) ©BVIG
¢\$		Ś	-57	5)
46.あっかんべー (Put out tongue) ©BVIG	47.YO! ©BVIG	48.ムンクの叫び (Munch's scream) ©BVIG	49.いただきます! (Let's eat) ©BVIG	50.にっこり (Smile) ©BVIG
Frama				
Frame				
Aurora	Beach Ca	alypso Clove	er Elite	Equinox
Flash	Gizmo	Glow Mood Lig	hting Pumped	Rave
Release	Swoosh V	Virtual		
Stamp				
Stamp				
A A	***			the second se

Continued on the next page •••

Appendix/Using External Devices/Troubleshooting

327



Dial Keys Assignments to Characters

Entry Modes Keys	Hiragana	Katakana	Alphabetic characters	Digits
1.0	あいうえお ぁぃぅぇぉl	アイウエオ ァィゥェォー	. @ / -*1 : 1	1
	かきくけこ2	カキクケコ 2	ABC2 [•] 2 abc2 [•] 3	2
E	さしすせそ3	サシスセソ3	DEF3 ^{*2} def3 ^{*3}	3
4 ^{<i>k</i>}	たちつてと っ4	タチツテト ッ4	GHI4 ^{•2} ghi4 ^{•3}	4
	なにぬねの 5	ナニヌネノ 5	JKL5 ^{*2} jkl5 ^{*3}	5
Mile	はひふへほ6	ハヒフヘホ 6	M N O 6 ⁺ 2 m n o 6 ⁺ 3	6
7*ros	まみむめも 7	マミムメモフ	PQRS7 ^{*2} pqrs7 ^{*3}	7
TUY8*	やゆよ ゃゅょ8	ヤユヨ ヤユョ8	TUV8 ^{*2} tuv8 ^{*3}	8
estimation of the second secon	らりるれろ9	ラリルレロ 9	W X Y Z 9 *2 w x y z 9 *3	9
+ 0 %	わをん0	ワヲン0	0	0
X Hard	* ° ^{*5}	ν ο	.ne.jp .co.jp .com .ac.jp @docomo.ne.jp WWW. http:// https:// *4	*
*###	— 、。! ? ()&	-、。!?()&	!?()&,;:"'	#

*1: "~" will be entered when the full-pitch/half-pitch setting is set to half-pitch.

*2: Characters highlighted with ____, available when upper/lower case setting is set to upper case.

*3: Characters highlighted with ____, available when upper/lower case setting is set to lower case.

*4: Characters highlighted with a , available when full-pitch/half-pitch setting is set to half-pitch.

*5: Text that has not been confirmed will be indicated with , and more characters can be added/entered. For characters that can take only a voiced sound symbol, * is added, and for characters that cannot take voiced or semi voiced sound symbol, " or " is entered.

List of Symbols and Special Characters

Symbol List

Full-pitch symbols

Y IJ Å ‰ ; ſ # b :... ю я 0 ? I Þ t ŧ L 1 あ \bigcirc b r 7" ヰ ٢ 夏 ŋ 7 ٢J h ケ 수 々 В E Н 11 d A Γ Λ Ζ <u>||</u> . . Θ I N Ξ K ٨ M D +) C Ρ Σ 2 3 (8) (0 П Т Y Φ (4) 6 6 (7)ł } > ψ (9)) 1 (Ω 10 (3) 6 Γ X α ß δ ന O) (4) Y ſ ľ ξ θ λ « 》 l 6 07) (8) 20 Π I ε η ι к (9) Ι ξ Ш IV ++IX] X ÷ v 0 π V VI VII VIII = μ p σ ŧ ≣ŋ ≥ < \leq 2. Х センチ が グラム h ., φ 7 > 00 τ υ X ψ ω A q d 0 " °C ¥ Б В Ë Ж アール ヘクタール 79 架 セント Г Л E リットル \$ % & パーセント ¢ £ # 3 И Й Н 影 ふい × К Л М mm cm km mg 8 0 Ρ @ 0 Π С Φ m² No. 公 Т У 摵 kg CC Tel \Diamond Х Ч 111 Ъ KK. 6 ∇ Ш Ы Ð ⊕ Ð Ð 1 Э 佛 侚 H 鹏 柾 × Î Ь 쪪 4 V Ю Я a б в Т \in \rightarrow \supset \supset ë \equiv ſ ş Σ J T 1 C C Г Д e ж 3 И U n \Rightarrow \Leftrightarrow Й К 0 Л М н П 1 n U Ξ ð A 1 E ∇ ф p С Т y Х Ц 4 « > \equiv 1 00 00 ч Ш Э Щ Ъ Ы Ь

Half-pitch symbols

!	"	#	\$	%	&	,
()	×	+	7	-	
1	0	1	2	; 3	4	5
6	7	8	2 9 @	1	;	<
=	>	8 ?	0	Γ	¥	1
^		•	-{	Ĩ	}	~
0	ī	1		÷	2	0

Symbol Conversion List

On the character entry screen, enter "きごう" to convert to bring up symbol candidates. And, you can enter characters listed below to convert into respective symbols.

Entry	Symbol	Entry
あっと、あっとまーく	00	でるた
あるふぁ	Αα	てん
あんだーばー		
あんど	& &	でんわ、てる
いげた	##	どしー、ど
いこーる	Ξ=	どる
いち	(1) I	とん
うえ	Î	なな、しち
えん	¥¥	なんばー
おす	ď	(こ
おんぷ	₽b	ぱーせんと
かける、ばつ	X	ぱい
かぶ、かぶしきがいしゃ	儭	はいふん
がんま	Γγ	はち
きゅー、く、きゅう	9 X	ひく、まいなす
きろ	ŧ.	ひしがた
きろぐらむ	kg	ひだり
きろめーとる	km	ふらっと
ぐらむ	グラム	へいほうめーと
ĩ	6 V	ベーた
こめ、こめじるし	*	ほし
さん	31	まる
さんかく	$\Delta \blacktriangle \nabla \blacksquare$	みぎ
レーレー	CC	みり、みりめ-
しかく		めーとる
しぐま	Σσ	めす
した	Ļ	やじるし
しめ	Ø	ゆう、ゆうげん
しゃーぷ	#	しゃ
じゅう	0 X	ゆうびん、ゆう んごう
すらっしゅ	1/\	よん、し
せんち、せんちめーとる	钌CM	りっとる
せんと	¢ ¹	3500
だい、だいひょう	(H)	わる
たす、ぷらす	++	

Entry	Symbol
でるた	$\Delta \delta$
てん	· · · · · · · · · · · · · · · · · · ·
でんわ、てる	Tel
どしー、ど	°C
どる	\$ ^F ,
とん	ь. Г.
なな、しち	0 VII
なんばー	# # No.
ات	Ø1
ぱーせんと	0/ 0/ パー 10 10 セント
ぱい	Ππ
はいふん	.
はち	® VII
ひく、まいなす	
ひしがた	$\diamond \blacklozenge$
ひだり	\leftarrow
ふらっと	b
へいほうめーとる	m²
ベーた	Bβ
ほし	☆★
まる	00●
みぎ	\rightarrow
みり、みりめーとる	^ສ ັບ mm
めーとる	メー トル
めす	<u>ұ</u>
やじるし	$\rightarrow \leftarrow \uparrow \downarrow \Rightarrow \Leftrightarrow$
ゆう、ゆうげんがい	侚
ゆうびん、ゆうびんば んごう	Ŧ
よん、し	(I)
りっとる	リッ トル
ろく	6 VI
わる	2003 2003

Pictograph (E-Moji) List

☀∞ҭӧ҂๏ӝі҇҄҄∖҄ヽҝѻѽҌѺС	
Ү ४ ॻ ७ ₰ ⅊ ≗ № ♥ ♥ ○ ♡ ♡ \ 🕸 🌢 놓 ∠	[1] [12] [26] [26] [26] [26] [26] [26] [26] [2
≁ \% ₩ ¥ 🖄 🔍 ୶ 🖹 🖻 8 Ø & ╡ 🕑 🖬 5	
∰  ♥ ♥ ♥ ■ = 2 % 3 4 5 6 7 8 9 0	1011 Loss
📲 🎢 😕 🚱 🗢 🎩 👗 🖤 💉 🐶 🖓 😁 🗙 😂 🗤	
■ 二 ❷ 圖 ▲ ♥ № 曲 ※ ♪ ♪ 些 � ◆ ☆ 貧	. · · · · · · · · · · · · · · · · · · ·
ⅲ 圖 🗎 🗎 🛱 🙅 🔇 ♥ 🕺 🖙 🖧 🧎 ೱೱೱ 🕴 !	? 🖾 🗣 ሰን
♠ ♦ ♣ @ 🤊 ﷺ ♨ ـ 🖉 🛛 🖉 ± 3 ⊷ Ծ ፬	K

E-Moii 2

Note

E-Moii 1

- Pictograph (E-Moji) may not be displayed correctly if they are sent to PCs or mobile phones that do not support i-mode. Also, the E-Moji may not be displayed correctly even if they are sent to i-mode phones that support those E-Moji depending on the other party's phone types.
- If a mail containing E-Moji 2 is sent to an i-mode phone that does not support E-Moji 2, pictograph (E-Moji) may not be displayed correctly.

Emoticon List

Emoticon	Reading	Emoticon	Reading	Emotico	n Reading
(;°0°)\	あ	(^O^)	かお	(((((^_^;)	かお
(^0^)	あーん、かお	(^-^)	えがお	(=_=)	てつやあけ
(>_<)	あいた	(^.^)	えがお	()zzz	ねる
(;^_^A	あせ	f(^_^)	えがお	(^-^)/	はい
(^_^;)	あせ	w(^o^)w	おー	!(^^)!	ぴんぽーん
('-'*)	あら	(*_*)	おどろき	w(°o°)w	わおー
m()m	_*	(°_°;)	おどろき	(?_?)	かお
(~_~;)	あれー、かお	(>o<")	かお	()	かお
(^-^)v	いえーい	(@_@)	かお	()	かお
(#)	いらいら	(``)	かお	(;)	かお
(+_+)	うーん	\(^-^)/	かお	()	かお
\(^O^)/	わーい	p(^^)q	がんば	()	かお
(*´-`)	うっとり	b(^-^)	ベー	()_	かお
(T_T)	なく	((^^))	かお	(;_;)	かお
(^0_0^)	かお	()	かお	^/^	かお
(^^)	かお	(~_~)	かお	^^;	かお
(~~ <i>S</i> ~	かお	(~0~)	かお	^_^;	かお
(^)	かお)^0^(かお	_()_	かお
(^_^)	かお	>^_^<	かお		•

*: You can select and enter from the Emoticon list screen. →P299

Note

• In a character entry screen, when you enter "Reading" listed above in the reading area, you can select the emoticon from the conversion options.

List of Common Phrases

Folder	Template	Folder	Template
Greeting	ありがとう (Thank you)	Invitation	TELして (Give me a call)
	ごめんね (I'm sorry)		今日、ヒマ? (Are you free today?)
	おはよう (Good morning)		飲みに行かない? (Shall we go drinking?)
	おやすみ (Good night)		遊びに行こうよ (Let's go out)
	よろしく (Nice to meet you)		週末空いてる? (Are you free this weekend?)
	元気? (How are you?)		今何してるの? (What are you doing now?)
	お疲れ様 (See you)		都合の良い日は? (Which day will you be available?)
	おめでとう! (Congratulations!)		今日はダメです (I'm not available today)
Answer	今電車の中 (Now I'm in the train)	Business	遅れます。(I'll be late)
	すぐ行きます (I'll be right there)		会議中です。(I'm attending a conference)
	もう少し待って (Wait a minute)		連絡下さい。(Please contact me)
	了解 (I see)		電話下さい。(Please give me a call)
	ОК (ОК)		後程ご連絡いたします。(I'll get back to you later)
	ダメ (No)		お世話になっております。(Thank you for your support)
	おまかせします (I'll leave it to you)		ご連絡ありがとうございました。 (Thank you for contacting us)
	楽しみにしています (I'm looking forward to it)		よろしくお願いします。(Thank you for your help in advance)
Appointment	少し遅れます (I'll be a little late)	English	Thank you.
	もうすぐ着く (I'm arriving soon)		I am not available right now.
	今移動中 (I'm moving now)		I'm late.
	先に行ってて (I'll follow you soon)		Call me back!
	もう着いたよ (I've arrived)		Where are you now?
	今どこにいる? (Where are you now?)		How are you?
	いつもの所 (I'm at the usual place)		See you soon.
	今日行けなくなりました (I became unable to go today)		Congratulations!
	•	User Folder 1	(Up to 8 templates can be registered)
		User Folder 2	(Up to 8 templates can be registered)

Kuten Code List

To enter a Kuten Code, enter the 3-digit number in the "Kuten digit 1 to 3" and then enter the number in "Kuten digit 4" consecutively.

	1						-	-					- 14		·				,					K-		10.4	1.4			
Kuten digit 1 to 3 010	0 1 ((21°-2)		uten 4	digi 5	6 •	7	8	9 ?	Kuten digit 1 to 3 083	0	1	2+		ten 4	digi 5		7	8	9	Kuten digit 1 to 3 207	0 贋	1 雁	2 頑	3	ten 4 願	digi 5		7	8	9
011 012 013 014 015 016 017 018 019 020 021 022	! × / × × × × × × × × × × × × × × × × ×	~) » × ♂ % © ■	、 仝=〔「÷♀#◇△=	: 々 〕」=。& ▲	^ ~:[『≠, * ▽ ∈	0: 」 ■ √ * @ ▼	·{ l >℃§ ※ [、	130 131 132 133 134 135 136 137 138 139	10 20 X ?? km ⊕.≕ : ·	① ① I ? [™] mg ① = ∩	②⑫Ⅱ="碧kg 金∫U	③③Ⅲ+□μ C 職 衝∮	④ ④ ① V ジャット m" ㈱Σ	515Ⅴ荒谷 "侑√	6 19 ∇ ダムミバ No.代上	⑦⑰Ⅵ レ ベネ K 嘂∠	⑧ 18 VIII アル mm 下LL た正	⑨ ⁽¹⁾ X ⁽²⁾ cm	207 208 209 210 211 212 213 214 215 216 217	基旗 紀鬼犠吉客宮空	奇既機徽亀疑吃脚弓穿	嬉期帰規偽祇喫虐急等	寄棋毅記儀義桔逆救怨	岐棄気貴妓蟻橘丘朽刻	一希 汽起宜誼		危忌 祈輝技掬杵休泣牛	喜揮 季飢擬菊黍及灸+	器机 稀騎欺鞠却吸球民
023 024 026 027 028		\	「 ▷\$\$#(⇒ ≡	U ⇔	⊐ ∀ ≪ †	⊑ ∃ ≫ ‡	∩ √ ¶	160 161 162 163 164	葵梓鮎鞍	亜茜圧或杏	· · · · · · · · · · · · · · · · · · ·	娃悪扱袷 四	阿握宛安した	家渥姐庵、	愛旭虻按	挨葦飴暗	始 芦 絢 案 吉	逢鯵綾闇	218 219 220 221 222 223	究巨禦 卿挟蕎	窮拒魚供叫教郷日	笈拠亨侠喬橋鏡	級挙享僑境況響切	糾渠京兇峡狂饗	虚 競強狭驚	許 共彊矯仰	距 凶怯胸凝	去鋸 協恐脅尭	居漁 匡恭興暁山
029 031 032 033 034 035	4 5 6 H I 4 R S ⁻	A J K	8 8 1 1 1	9 C M W	0 D N X	1 E 0 Y	2 F Z	3 G Q	164 165 166 167 168 169 170	威移井稲引	尉維亥茨飲院	以惟緯域芋淫陰	伊意胃育鰯胤隠	位慰萎郁允蔭韻	依易衣磯印 吋	偉椅謂一咽	囲為違壱員	夷畏遺溢因	委異医逸姻	224 225 226 226 227 228	業巾芹 俱駒	局錦菌 句具	曲斤衿 区愚	極欣襟 狗虞	 玖 喰	琴近	粁禁金 苦偶	僅禽吟 躯寓	勤筋銀 駆遇	均緊九駈隅
036 037 038 039 040 041	fgh pqi z おかた	ร รับ	jt いぎ	aku うく	blv うぐ	cmw ぇけ	dnx えげ	e o y おこ	170 171 172 173	迂唄云	雨欝運	卯蔚雲	鵜鰻	窺姥	5 丑 厩	右碓浦	宇臼瓜	鳥渦閏	羽噓噂	229 230 231 232 232	串栗郡	櫛掘繰	釧窟桑 袈	屑沓鍬	屈靴勲	轡君	窪薫	熊訓	隈群 啓	粂軍 圭
041 042 043 044 045 046 047 048	おごぞとひぼゆゐ うさたどびぽょゑ	じちにふみら	ひじぢぬぶむり	くすっねぷめる	、ずつのへもれ	りせづはべ やろ	いぜてばぺやわ	こそでばほゅわ	173 174 175 176 177 178	曳衛閲掩艶	栄詠榎援苑	永鋭厭沿薗	荏泳液円演遠	餌洩疫園炎鉛	】 叡瑛益堰焔鴛	営盈駅奄煙塩	嬰穎悦宴燕	影頴謁延猿	映英越怨縁	233 234 235 236 237 238 239	珪携繫鶏傑倹建	型敬罫芸欠倦憲	契景茎迎決健懸	形桂荊鯨潔兼拳	係径渓蛍劇穴券捲	傾恵畦計戟結剣	慶稽詣撃血喧	慧系警激訣圈	白憩経軽隙月堅	揭継頚桁件嫌
050 051 052 053 054		ゴキシチ	イギジヂョ	ウクスッカ	ウグズツィ	ェケセヅハ	エゲゼテバ	オコソデパ	178 179 180 181 182	凹鴎牡	央押黄乙	奥旺岡俺	往横沖卸	応欧荻恩 #	殴億温	王屋穏	於 翁憶音	汚襖臆	甥備	240 241 242 243 243	肩鹸絃	検見元舷	権謙原言	牽賢厳諺	犬軒幻限			硯険源	絹顕玄 呼	県験現
055 056 057 058	ヒビ ビ ボ ポ マ ユ ヨ 三 井 ヱ う	ピ フ ミ ラ ン	ヌブムリヴ	ネプメルカー	ノヘモレケー	ベヤロ	ペヤワ	ホュワ	182 183 184 185 186	仮家禍蝦	何寡禾課	伽科稼嘩	価暇箇貨	佳果花迦	加架苛過	可歌茄霞	嘉河荷蚊	下夏火華俄!	化嫁珂菓峨	244 245 246 247 248	姑糊顧御乞:	孤袴鼓悟鯉.	己股五梧交	庫胡互檎佼	弧菰伍瑚侯	乎戸虎午碁候	個故誇呉語倖	古枯跨吾誤光	呼湖鈷娯護公	固狐雇後醐功
060 061 062 063 064 065	ΑΕ ΚΛΝ ΥΦ <i>θιη</i> στα	Λ Ν ΚΨ α κλ	ΔΞΩ βμ χ	ΕΟ γν ψ	ΖΠ δξω	Η Ρ ε	Θ Σ ζ π	Ι Τ η ρ	187 188 189 190 191 192 193	我介恢 蟹慨馨	牙会懐魁開概蚌	画解戒晦階涯垣	臥回拐械貝碍柿	芽塊改海凱蓋蛎	蛾壞 灰劾街鈎	賀廻 界外該劃	雅快 皆咳鎧嚇	餓怪 絵害骸各	駕悔 芥崖浬廓	249 250 251 252 253 254 255	効 巧拘江紅航	勾后巷控洪紘荒	厚喉幸攻浩絞行	口坑広昂港綱衡	向垢庚晃溝耕講	好康更甲考貢	孔弘杭皇肯購	孝恒校硬肱郊	宏慌梗稿腔酵	工抗構糠膏鉱
070 071 072 073 074 075	А Е И Й Н Т У С Б Э К б в П	КЛ Х Я С	Г М Ц е	Д Н Ч ë	E ОШ Ж	Ë ПЩ З	Ж РЪ и	З С Ы ай	193 194 195 196 197 198 199	響拡赫顎恰叶噛	虹 搅較掛括椛鴨	坦格郭笠活樺栢	仰核閣樫渇鞄茅	勁 殻隔橿滑株菅	妈獲革梶葛兜	劃確学鰍褐竈	^쪬 穫岳潟轄蒲	谷覚楽割且釜	郮角額喝鰹鎌	255 256 257 258 259 260 261	机砿号告忽 昏	元鋼合国惚此昆	仃閤壕穀骨頃根	衡降拷酷狛今梱	 禰項濠鵠込困混	(香豪黒 坤	高轟獄	鴻麹漉 婚	旿剛克腰 恨魂	<u>勤</u> 劫刻甑 懇
076 077 078 080 081 082	кл фх юя 	и н	о Ш ¬ - Н		р ъ – – –	сы + - - - - - - - - -		у э ⊣ ⊢	200 201 202 203 204 205 206	1 勘幹款竿諌舘	粥勧患歓管貫丸	1 刈巻感汗簡還含	?苅喚慣漢緩鑑岸	瓦堪憾澗缶間	乾姦換潅翰閑玩	侃完敢環肝関癌	冠官柑甘艦陥眼	寒寛桓監莞韓岩	刊干棺看観館翫	261 262 263 264 265 266	L 佐詐哉災載	叉鎖塞采際	收裟妻犀剤	L 嵯坐宰砕在	左座彩砦材	差挫才祭	査債採斎財	(沙催栽細冴	送 再 歲 菜 坂	些砂最済裁阪

Kuten digit 1 to 3	0	1	2	3	4	dig 5	6	7	8	9	Kuten digit 1 to 3	0	1	2	3	4	digi 5	6	7	8	9	Kuten digit 1 to 3	0	1	2		4		t 4 6	7	8	9
267 268 269 270 271 272 273		榊搾笹察捌撒賛		桟	崎柵刷擦皿燦斬	埼窄 札晒珊暫	殺三産	鷺索 薩傘算	作錯 雑参纂	削桜 皐山蚕	336 337 338 339 340 341 342	搜漕草霜 捉卒	掃燥荘騒臓束袖	蔵測	掻痩蒼増贈足揃	操相藻憎造速存	早窓装 促俗孫	曹糟走 側属尊	巣総送 則賊損	遭即族	槽聡鎗 息続遜	393 394 395 396 397 398 399	拝倍陪柏		敗	箔	矧	巴罵牌煤萩	把芭背狽伯薄	肺買剥	覇俳輩売博曝	杷廃配賠拍漠
273 274 275 276 277 278 279			司市枝肢賜慈	史師止脂雌持	嗣志死至飼時	思氏視	士指獅詞事	仕始支祉詩似	仔姉孜私試侍	伺姿斯糸誌児	343 344 345 346 347 348 349	柁岱腿台		太楕待袋第択凧		, 詑駄態退題沢只	鷹	堕体替隊滝琢	妥堆泰黛瀧託	鯛卓	打耐胎代啄濁	400 401 402 403 404 405	畑抜半犯	函畠筏反班	箱八閥叛	硲鉢鳩帆繁		塙斑藩盤	板販	(隼氾範		肌罰判版煩
280 281 282 283 284 285	, 耳軸湿屡社	次自	滋蒔	7治辞七質舎謝	2爾汐叱実写車	執蔀	痔式失篠捨蛇	磁識嫉偲赦邪	鴫室柴	而竺悉芝煮勺	350 351 352 353 354	棚担綻	叩谷探耽	瓜但狸旦胆段	達鱈歎蛋	、辰樽淡誕談			巽単短壇	端	辿坦箪断	405 406 407 408 409 410			疲避	庇皮非眉稗	彼	悲秘樋		罷備	披肥尾 膝	匪斐被微 葌
286 287 288 289 290 291	4尺惹腫綬 終		百灼取酒囚就習	國爵守首収州臭	平酌手儒周修舟	釈朱	錫殊呪 拾	若狩	寂	弱	354 355 356 357 358 359	畜中註	竹	痴筑宙鋳凋		置逐抽樗寵		知蜘窒柱猪	地遅茶注苧	馳嫡虫	恥築着衷貯	411 412 413 414 415		弼謬豹鰭		畢彪描	筆標病	逼氷秒	桧漂苗	姫瓢錨	媛票鋲	2 紐表蒜頻
292 293 294 295 296 297	《輯従夙述旬醇	週	酋	<> X 酬 汁 祝 春 淳 初	「集渋縮瞬準所	醜獣粛竣潤	不什縱塾舜盾曙	~ 住重熟駿純渚		此十叔術循遵緒	360 361 362 363 363	暢調	帖朝諜	帳潮超	庁牒跳	弔町銚	張眺長鎮 0	頂	徴脹鳥		挑蝶歩	415 416 417 418 419 420	府膚武伏	芙舞副	不扶譜葡復腹	付敷負蕪幅複	埠斧賦部服覆	封		附風	富符侮葺 沸	布腐撫蕗 仏
298 299 300 301	署恕 妾	書鋤勝娼	薯除匠宵	諸傷升将	諸償召小	助 哨少	叙 商尚	女 唱庄	序 嘗床	徐 奨廠	364 365 366		柘	鎚辻爪	蔦	綴	鍔	栂椿 高	掴潰	槻坪	佃壷	421 422 422	粉	鮒糞	分紛	吻雰	噴文	墳 間	憤丙	扮併	焚兵	奮塀
302 303 304 305 306 307	彰松照紹詳丈	承梢症肖象氶	抄樟省菖賞乗	招樵硝蒋醤冗	掌沼礁蕉鉦剰	衝鍾	昇渉称裳鐘場	昌湘章訟障壌	昭焼笑証鞘嬢	晶焦粧詔上常	366 367 368 369 370 371	艇	抵訂邸	呈挺諦鄭適	堤提蹄釘鏑	定梯逓鼎溺	帝汀 泥哲	宁底碇 摘徹	擢	敵	偵弟締 滴迭	423 424 425 426 426	僻		弊癖編 舖	柄碧辺鋪	並別返		蔑便	箆勉	米偏娩	頁変弁 輔
308 309 310 311 312	情	擾錠拭	米条嘱植尻振	几杖埴殖伸新		状 織侵	畳	壊穣 色娠浸	蒸触寝	市譲 食審申	372 373 373 373 374	鉄転	典顛	填点	天	展		添		甜兎		427 428 429 430 431	穂俸抱 蜂	休募包捧法褒	墓呆放	慕	画戊奉朋砲邦	暮宝	母峰胞	簿	桶 菩崩 萌 鵰	#一做庖 蓬乏
313 314 315 315	疹身尋	真辛甚	神進尽	秦針腎	紳震訊	臣人迅	芯仁陣	薪刃靭	親塵笥	·診壬 諏	375 376 377 378 379	睹怒宕	途倒島淘筒	都党嶋湯糖	鍍冬悼涛統	砥凍投灯到	砺刀搭燈	努唐東当	度塔桃痘	土塘梼祷	奴套棟等	432 433 434 435 436	亡望鉾牧	傍某防睦	副棒吠穆凡	坊冒頬釦	; 妨紡北勃	帽肪僕		忙謀墨		暴貿朴奔
316 317 318 319 320	須炊瑞椙		図粋崇頗摺	厨翠嵩雀寸	衰	遂	垂酔趨	帥錐雛	錘	水随杉	380 381 382 383 384 385		董陶撞匿読酉	蕩頭洞得栃瀞	藤騰瞳徳橡噸	討鬪童涜凸屯			踏同道禿届沌	堂銅篤鳶	透導峠毒苫遁	436 437 438 439 440	鱒	枚桝麿漫	亦	哩俣慢	摩槙又満				埋鮪迄	妹柾侭
320 321 322 323	栖	姓正誠	清	牲	生	瀬政盛醒	整精	是星聖静	凄晴声斉	制棲製税	386 386 387			曇 捺	鈍鍋		↓ 那		乍畷	凪南	薙楠	440 441	蜜	湊	蓑	味稔		★魅妙い			岬 眠	密
324 325 326 327	籍接	績摂	脊折	責設	赤窃	斥跡節宣	蹟説	碩雪	切絶	拙舌	388 388 389	虹		B	乳	尼入				賑	肉	441 442 442	夢	無	牟	矛		<u>鵡</u>	椋	婿		務具
328 329 330 331	扇煽	撰旋繊	栓穿羨	栴箭腺	泉線舛		洗薦	染詮	潜賎	煎践	390 390		如	尿	韮		<u>妊</u> な	忍	認	濡		443 444 444			明綿					姪模		
332 332 333	<u>全</u>	禅	繕	膳	糎	そ 噌	塑	岨	措	曾	390 391 392	袮粘	寧	葱	猫	熱			捻	撚	禰燃	445 446 447	目		勿	餅		戻	蒙	(儲貰	木	黙
334 335	組	蘇	訴	阻	遡	礎鼠宋	僧	創	双		392 393	脳				埜	嚢	悩	濃	納	能	447 448			役	也	冶	夜		耶 靖		

Kuten digit				Ku	iten	digi	it 4				Kuten digit				Ku	ten	dig	it 4				Kuten digit				Ku	iten	digi	t 4			
1 to 3	0	1	2			5		7	8	9	1 to 3	0	1	2	3	4	5	6	7	8	9	1 to 3	0	1	2	3	4	5	6	7	8	9
449	鑓				14	b				_	513	咯	喊	喟	雷	啾	喘	喞	單	啼	喃	590	-	曄	瞭	曖	曚	曠	昿	曦	曩	日
449	_	脸	ŵ	ŝth		₽		_			514 515	喻嘔	喇嗷	喨嘖	嗚嗾	嗅	嗟嘛	嗄	嗜噎	嗤噐	嗔營	591 592	曵 朶	曷杁	朏朸	朖朷	朞 杆	朦却	朧杠	霸杙	朮杣	束杤
449		偷諭	愈輸	油唯	癒佑	優	勇	友	宥	幽	516	喧噛	嗷嘶	嗄嘲	噘	嗽噫	哪噤	嗹嘯	噬	南 噪	宮嚆	592	米杠	が木	初枩	初杼	竹杪	杞枌	私枋	和标	仙枡	初枅
450	悠	憂	輸損	唯有	袖		デ 涌	猶	有猷	曲	517	嚀	嚊	嚠	嚏	嚏	嚥	嚮	嚶	嚴嚴	間間	594	枷	柯	公枴	柬	初枳	柩	构	相	柞	析
452	祐	巡裕	誘	近	一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一	郵		融	シタ	ш	518	嚼	囁	囃	囀	囈	囎	「「」	囓		韶	595	机	柮	抱	析	粒	柧	檜	证栞	框	栩
	TH	ТН	μ/ J	~~~		Ł	ings.	TIGA	Í		519	囹	圀	囿	圄	圉		-7.49		-	-	596	桀	榜	栲	桎	梳	栫	桙	档	桷	桿
452										予	520		圈	威	圍	圓	專	8	嗇	圜	圦	597	梟	梏	梭	梔	條	梛	梃	檮	梹	桴
453	余		誉	輿	預	傭	幼	妖	容	庸	521	圷	圸	坎	圻	址	坏	坩	埀	垈	坡	598	梵	梠	梺	椏	梍	桾	椁	棊	椈	棘
454	揚	揺	擁	曜	楊	様	洋	溶	熔	用	522	坿	垉	垓	垠	垳	垤	垪	垰	埃	埆	599	椢	椦	棡	椌	棍		1.45			
455	窯	羊	耀	葉	蓉	要	謡	踊	遥	陽	523	埔	将	将	堊	埖	埣	堋	堙	堝	塲	600	1.1	棔	栈	棕	樱	椒	椄	棗	棣	椥
456	養	慾	抑	欲	沃	浴	뀦	翼	淀	_	524 525	堡墟	塢墫	瑩墺	塰壞	毀墙	塒墸	堽	塹壅	墅壓	墹壑	601 602	棹楷	棠楜	检楸	椨楫	椪楔	椚楾	椣楮	椡椹	榆楴	楹椽
456	_	_	_	_			_	_	_	羅	526	墟	場	埃壘	堰	垣壜	壤	童	望壯	壷	至壹	603	桶	椰	榆	件 楞	快楝	榕	相楪	個	怖榮	修槐
457	螺	裸	来	莱	頼	雷	洛	絡	落	酪	527	壻	壺	素	友	文	金	王夛	梦	影	丧	604	榿	槁	槓	榾	槎	寒	槊	槝	有榻	槃
458	乱	卵	嵐	欄		藍	蘭	覧			528	夭	本	夸	夾	竒	奕	奐	奎	奚	奘	605	榧	樮	榑	榠	榜	榕	榴	槞	槨	樂
					ι	J					529	奢	奠	奧	獎	奩						606	樛	槿	權	槹	槲	槧	樅	榱	樞	槭
458	_								利	吏	530		奸	妁	妝	佞	侫	妣	妲	姆	姨	607	樔	槫	樊	樒	櫁	樣	樓	橄	樌	橲
459	履	李	梨	理	璃田	±4	n+-	/ th	-t-	-	531	姜	妍	姙	姚	娥	娟	娑林	娜	娉	娚	608	樶	橸	橇	橢	橙	橦	橈	樸	樢	檐
460 461	苁	痢	裏	裡	里	離	陸	律の	率	立	532 533	婀嫋	婬嫂	婉	娵	娶嫗	婢	婪嫩	媚	媼	媾	609 610	檍	檠檗	檄蘗	檢檻	檣櫃	+33	檸	按	抽	+65.
461	律降	掠竜	略龍	劉侶	流慮	溜旅	琉虜	留了	硫亮	粒僚	534	嫋嬌	短嬋	媽嬖	嫣嬲	姗姗	嫦嬪	婉嬶	嫖嬾	嫺孃	嫻孅	611	櫑	来櫟	柴檪	個	個櫪	櫂櫻	停樓	檳蘖	檬櫺	修樂
463	両	電凌	寮	料	湿梁	涼	猟	療	瞭	稜	535	媚	子子	安孕	孚	卖	奚孥	孩	熟	葵	孵	612	欖	常	欄	欸	欷	盗	香欹	余飲	歇	和
464	糧	良	諒	遼	量	陵	領	力	緑	倫	536	學	斈	孺	÷	ė	宦	宸	寃	寇	寉	613	歉	歐	歙	獻	歛	歟	歡	歸	歹	歿
465	厘	林	淋	燐	琳	臨		隣	鱗	麟	537	寔	寐	寤	實	寢	寞	寥	寫	寰	寶	614	殀	殄	殃	殍	殘	殕	殞	殤	殪	殫
		-			1	5					538	寳	尅	將	專	對	尓	尠	尢	尨	尸	615	殯	殲	殱	殳	殷	殼	毆	毋	毓	毟
466	瑠	塁	涙	累	類						539	尹	屁	屆	屎	屓	ä.,	44	ي ل	44	ىر	616	毬	毫王	毳	毯	麾江	氈	氓	气	氛	氤
466					1	1		/Fal	×	FF-h	540 541	岑	屐岔	屏 妛	孱	屬	屮	乢	屶岷	屹	岌	617	氣汾	汞汨	汕	注 沒	汪法	沂泄	沍決	沚泓	沁注	沛
460	嶺	怜	玲	礼	苓	令鈴	伶隷	例零	冷霊	励麗	541	今峇	出峙	安 峩	岫峽	岻峺	岶 峭	呼鳥	岻	峅崋	岾崕	618 619	万泅	万	汳沮	没沱	沐沾	池	决	754	沽	泗
468	齢	暦	歴	列	F 劣	如烈		帝廉	壶恋	雌	543	崗	时 嵜	我	岷	岐崑	哨崔	局崢	岐	半崙	崘	620	NCI	加油	山泛	泥	泙	泪	洟	衍	洶	洫
469	漣		簾	練	聯	/113	21	MK		DŦ	544	嵌	嵒	嵎	嵋	嵬	差	嵶	嶇	嶄	嶂	621	洽	洸	洗	洵	洳	洒	洌	浣	涓	浤
470		蓮	連	錬							545	嶢	嶝	嶬	嶮	嶽	嶐	嶷	嶼	巉	巍	622	浚	浹	浙	涎	涕	濤	涅	淹	渕	渊
					7	3					546	巓	巒	巖	///	巫	E	巵	帋	帚	帙	623	涵	淇	淦	涸	淆	淬	淞	淌	淨	淒
470					呂	魯	櫓	炉	賂	路	547	帑	帛	帶	帷	幄	幃	幀	幎	幗	幔	624	淅	淺	淙	淤	淕	淪	淮	渭	湮	渮
471	露	労	婁	廊	弄	朗	楼	榔	浪	漏	548	幟	幢	幣	幇	ŦŦ	并	幺	麼	广	庠	625	渙	湲	湟	渾	渣	湫	渫	泉	湍	渟
472	牢	狼	篭	老	聾	蝋	郎	六	麓	禄	549	廁	廂	廈	廐	廏	nter	rde:	rie -	rates.		626	湃	渺	湎	渤	滿	渝	游	溂	溪	溘
473	H) J	録	論		1	h				_	550 551	廬	廖雕	廣廳	廝廰	廚	廛廸	廢廾	廡 弃	解弉	廩彝	627 628	滉薄	溷滂	滓溟	溽潁	溯漑	滄灌	溲滬	滔滸	滕滾	溏漿
473	_	_	_	倭	和	話	歪	賄	脇	惑	552	疊彜	廱 七	爬弑	感弖	经	四	弸	开哥	弾	彌	629	冷滲	~ 漱	~ 滯	漲	滌	/隹	//巴	/¤T	122	R
474	枠	鷲	亙					蕨		湾	553	響	弯	日	家	う彗	彙	当	彭	1	彷	630	15	漾	漓	滷	澆	潺	潸	澁	澀	潯
475		腕									554	徃	徂	彿	徊	很	徑	徇	從	徙	徘	631	潛	潜	潭	澂	潼	潘	澎	澑	濂	潦
											555	徠	徨	徭	徼	忖	忻	忤	忸	忱	忝	632	澳	澣	澡	澤	澹	濆	澪	濟	濕	濬
											556	悳	忿	怡	恠	怙	恂	怩	怎	怱	怛	633	濔	濘	濱	濮	濛	瀉	瀋	濺	瀑	瀁
480	-	弌	丐	丕	个	丱	1	丼	1	X	557	怕	佛	怦	快	惊	恚	恁	格	恷	恟	634	瀏	濾	瀛	瀚	潴	瀝	瀘	瀟	瀰	瀾
481 482	乖亟	乘	亂	」	豫亭	亊亶	舒从	式仍	于仄	亞	558 559	協	恆悍	恍	恣	恃	恤	恂	恬	恫	恙	635 636	瀲	灑烟	灣烋	炙烝	炒烙	炯焉	烱烽	炬焜	炸炉	炳焕
483	亟仂	仗	亢仞	亰仭	宅任	宣价	~ 伉	05 佚	人估	仆佛	560	悁	1千 悄	惧悛	悃悖	悚悗	悒	悧	悋	惡	悸	637	炮熙	照	版		冶煌	馬煖	燡煬	焼熏	焙燻	燥熄
484	佝	佗	佇	估	侈	侏	侘	佻	佩	佰	561	惠	惓	悴	中	悽	惆	悵	惘	協	愣	638	熕	慰	熬	和燗	熹	熾	燒	魚	燔	燎
485	侑	佯	來	侖	儘	俔	俟	俎	俘	俛	562	愆	惶	惷	愀	惴	惺	愃	惚	惻	惱	639	燠	殿	燧	燵	燼		150			
486	俑	俚	俐	俤	俥	倚	倨	倔	倪	倥	563	愍	愎	慇	愾	愨	愧	慊	愿	愼	愬	640		燹	燿	爍	爐	爛	爨	爭	爬	爰
487	倅	伜	俶	倡	倩	倬	俾	俯	們	倆	564	愴	愽	慂	慄	慳	慷	惨	慙	慚	慫	641	爲	爻	爼	爿	牀	牆	牋	牘	牴	牾
488	偃	假	會信	偕	修供	偈	做	偖	偬	偸	565	慴	傷	慥	博	働	慝	慓	慵	憙	慭	642	犂	犁	犇	犒	犖	犢	犠	犹	犲	狃
489	傀	傚	傅	傴	傲	唐	100	齿	/44	/44	566	憇	憬	憔	憚	憊帰	憑	憫	憮	懌	懊	643	狆	狄	狎	狒	狢	狠	狡	狭	狷	倏
490 491	唐	僉價	僊僵	傳儉	僂儁	僖儂	僞儖	僥儕	僭儔	僣儚	567 568	應懣	懷懶	懈懺	懃懴	燥懿	憺懽	懋懼	罹懾	懍戀	懦戈	644 645	猗獎	猊獏	猜默	猖獗	猝獪	猴獨	猯獰	猩獸	猥獵	猾獻
491	僮儡	1頁 儺	僵儷	飯嚴	1時 儻	低儿	低兀	(f) 兒	倚	伊免	569	忽成	懶成	戦戌	戦 義	豌夏	1隹	7隹	THE	72%	×	645 646	突獺	狭 珈	 新 玳	獗珎	<i></i> 宿 玻	狥珀	徑 珥	歌珮	頒 珞	厭璢
493	·····································	競	兩	兪	儒兮	九冀	П	尼	册	兎	570	-A	憂	武戡	支截	支戮	戰	戲	戳	扁	扎	647	琅	瑯	玩	5 语	班	玷	瑕	暉	垣瑟	瑙
494	冏	冑	冓	冕	-	冤	冦	家	冩	冪	571	扞	扣	五	扠	扨	扼	抂	抉	批	抒	648	瑁	瑜	瑩	現	瑣	瑪	瑶	瑾	璋	璞
495	>	决	冱	冲	冰	况	冽	凅	凉	凛	572	抓	抖	拔	抃	抔	拗	拑	抻	拏	拿	649	璧	瓊	瓏	瓔	珱		-			
496	Л	處	凩	凭	凰	Ц	凾	刄	刋	刔	573	拆	擔	拈	拜	拌	拊	拂	拇	抛	拉	650		瓠	瓣	瓧	瓩	瓮	瓲	瓰	瓱	瓸
497	刎	刧	刪	刮	刳	刹	剏	剄	剋	剌	574	挌	拮	拱		挂	挈	拯	拵	捐	挾	651	瓷	甄	甃	甅	甌	甎	甍	甕	甓	甞
498	剞	剔	剪	剴	剩	剳	剿	剽	劍	劔	575	捍	搜	捏	掖	掎	掀	114	捶	掣	掏	652	甦	甬	甼	畄	畍	畊	畉	畛	畆	畚
499	劒	剱	劈	劑	辨	#2	7774			去水	576	掉场	捉 话	掵	捫	振 按	掾	指堪	揀	揆	揣	653	眩蟲	時	客長	畫	除店	畸	富水	疆	疇	時
500 501	勣	辧勦	劬飭	劭勠	劼勳	券勵	勁勸	勍勹	勗匆	勞匈	577 578	揉攝	插搗	揶搨		搖摧	搴辇	搆	搓摎	搦攪	搶撕	654 655	疊痃	靈疵	疂疽	疔疽	疚疼	疝疱	疥痍	疣痊	痂痒	疳痙
502	则甸	制	助匐	剑匏	劃七	周川	甸匣	匯	列	函靈	578	瘫撓	海		博撈	推撼	手]守	19	1見	1州	656	法志	泚 痞	疽痾	坦痿	~ 痼	泡瘁	痰	煙痺	件痲	燈麻
502		副		船卅	世	一	王王	準	1	□	580	JTC	據	協		澤	撻	擘	擂	擱	擧	657	瘋	~ 瘍	癫	瘟	瘧		痘	瘢	癫瘤	瘴
504	卮	卵	卻	卷	Ē	厖	厠	一厦	厥	厮	581	舉	擠	擡		濤	擯	授	摘	擴	擲	658	瘰	瘻	癇	癥	癆	癜	癘	癡	癢	癨
505	厰	4	參	簒	雙	叟	曼	燮	μŢ	叨	582	擺	攀	擽	攘	攜	攅	攤	攣	攫	支	659	癩	癪	癧	癬	癰					
506	叭	叺	吁	吽	呀	听	吭	吼	吮	吶	583	攵	攷	收	攸	畋	效		敕	敍	敘	660		癲	癶	癸	發	皀	皃	皈	皋	皎
507	吩	吝	呎	咏	呵	咎	呟	呱	呷	呰	584	敞	敝	敲		斂	斃	變	斛	斟	斫	661	皖	皓	皙	皚	皰	皴	皸	皹	皺	盂
508	咒	呻	咀	呶	咄	咐	咆	哇	咢	咸	585	斷	旃	旆		旄	旌	旒	旛	旙	无目	662	盍	盖	盒	蓋	盡	盟	盧	盪	蘯	盼
509 510	咥	咬咫	哄哂	哈咤	咨咾	д	応行	वा	n rik	n≭	586 587	旡昜	旱晏	杲晄	昊 晉	昃晁	旻晞	杳 晝	昵晤	昶晧	昴晨	663 664	眈眸	眇睇	眄睚	眩睨	眤睫	眞睛	皆脾	眦睿	眛睾	眷睹
510	唔	哽	哮	叱 哭	吨哺	咼哢	哘唹	哥啀	哦啣	唏啌	588	 	安晢	呒断		兆量			暗暄	咕暘	辰瞑	665	時時	瞬	眶瞑	500 100	埏瞞				辛瞿	暗瞼
512	售	吸	啅	天啖	啗		唳	啝	喙	喀	589	監	量	曉		単	P.X.	HŦ.	P1.00	HEU	P/T	666	瞽	瞻	曚朦	星	麚					ᇞ
				~ ~	-	. 647	~~~																			~			. /			

Appendix/Using External Devices/Troubleshooting ____ Kuten Code List

Kuten digit Kuten c	digit 4	Kuten digit		Kuten dig	it 4	Kuten digit	Kuter	n digit 4
	5 6 7 8	9 1 to 3	0 1 2	3 4 5	6 7	8 9 1 to 3	0 1 2 3 4	
		硼 744	衄衂衒	衙衞衢	衫 袁	衾 袞 821 始 始 922	 開 問 闘 闘 闘 闘 闘 闘 闘 闘 闘 闘 闘 闘	
668 碚 碌 碣 碵 碪 i 669 碾 碼 磅 磊 磬	碯 磑 磆 磋	磔 745 746	袖 衽 袵 袍 袤 袰	衲 袂 袗 袿 袱 裃		袖 袢 822 裘 裙 823	魎 魑 魘 魴 鮓 鮠 鮨 鮴 鯀 鯊	
	礇礒礑礙	礬 747	装裹褂	褐 裴 裨		褌 福 824	鯣鯢鯤鯔鯡	
671 礫 祀 祠 祗 祟 ;	祚 祕 祓 祺	祿 748	褓襃褞	褥褪褫		褻褶 825	鰔鰉鰓鰌鰆	鰈 鰒 鰊 鰄 鰮
		秉 749	褸 襌 禅	襠襞	188 144	826	鰛鰥鰤鰡鰰	
		稠 750 穡 751	襦 襤 覈 覊 覓			而覃 827 覯覲 828	鱠 鱧 鱶 鱸 鳧	
		窘 752	<u>秋</u> 鸭 克 覺 覽 覿	觀觚觜		觞 觸 829	<u>就</u> 協 鴾 銜 鵈	
	竅 竄 窿 邃	竇 753	訃 訖 訐	訂 訛 訝		訪 詛 830	鵝 鵞 鵤 鵑	
		竢 754	治 詆 詈	詼 詭 詬		誂 誄 831	鶫鵯鵺鶚鶤	
678 竦 竭 竰 笂 笏 1 679 笞 笵 笨 笶 筐	笊 笆 笳 笘	笙 755 756	海 誡 誑 諚 諌 諳	計 誦 誚 諧 諤 諱		諍 諂 832 諢 諷 833	3 稍 鵤 鳥 鷂 3 稍 鵤 鳥 鷂 3 稍 鷽 鸚 鸛 鶯	
	筌 筅 筵 筥	策 757	誕 課 語	音 丙 译 謇 溢 諡		禪 諷 033 謗 謠 834	<u>馬 </u>	
		箜 758	謳鞫謦			譏譎 835	魏靡黌黎科	
		篏 759	證諧諧	譚譜		836	點 黥 黨 黯 黴	
	簔 篦 篥 籠 簧 篶 簀 簧	簀 760 簪 761	繰 譬 譲 讖 讙	澤譴譽		儲 讒 837豌 豎 838	電 鼇 齕 皷 鼕 齔 齣 齟 齠 齡	
		審 762	譲 讖 讙 豐 豕 豢	讃 谺 豁 豬 豸 豺		蜿 壹 030 貅 貊 839	齔 齣 齟 齠 齡 齲 齶 龕 龜 龠	
		粤 763	狸貌貔	豼 貘 戝		貽 貲 840	堯 槇 遙 瑤	
		粹 764	貳 貮 貶	賈 賁 賤		賽賺		
688 粽 糀 糅 糂 稼 689 糲 糴 糶 糺 紆	糒 糜 糢 鬻	糯 765 766	膊 贄 贅 賍 贔 贖	贊 贇 赢 赧 赭 赱		齎 贓 趙 跂		
	絅 絋 紮 紲	約 767	<u></u> 趾 趺 跏	服 船 之 跚 跖 跌		坦 以 跪 跫		
691 紵 絆 絳 絖 絎	絲絨絮絏	絣 768	跟跣跼	踈 踉 跿		践 踟		
		綵 769	蹂踵踰	踴 蹊 险 啮 吻	att nuu	Prof. Prof.		
		縮 770 縣 771	蹇蹉躏蹕蹶	蹌 蹐 蹈 蹲 蹼 躁		蹠 踪 躄 躋		
		糜 772	瞬 曄 	時 曝 躙 躪		是 吗 躰 軆		
696 縵 縹 繃 縷 縲	縺 繧 繝 繖	繞 773	躲 躾 軅	軈 軋 軛	軣 軼	軻 軫		
		續 774	軾 輊 輅	輕輒輙		輟 輛		
698 辩 繿 纈 纉 續 699 繊 纛 纜 缸 缺	纒纐纓纔	纖 775 776	輌 輦 輳 轆 轎 轗	輻 輹 轅 轜 轢 轣		轌 轉 辟 辣		
	罐网罕罔	罘 777	辭辯辷	池 迥 迢		邇迴		
		羈 778	逅 迹 迺	逑 逕 逡	逍 逞	逖 逋		
	养 羣 羯 羲	羹 779	逧 逶 逵	達 迸	1. A. 124	** **		
		翡 780 耘 781	遏 遐 遞 遨 遯	遑 遒 逎 遶 隨 遲		通 遘 邁 邀		
		聘 782	邊邊邏	邨 邯 邱		郤扈		
		聽 783	郛鄂鄒	鄙鄲鄰		酘 酣		
		肬 784胱 785	酥 酩 酳 醪 醵 醴	酲 醋 醉 醺 醸 釁	醂 醢 釉 釋	醫醯 釐釖		
708 胛 胥 胙 胝 冑 り 709 脛 脩 脣 脯 腋	胚脂脉膀	786	影靈區	醺 醸 釁 釼 釵 釶		釐 釖 鈔 鈬		
	腑胼腱腮	腥 787	鈕鈑鉞	鉗 鉅 鉉		銕 鈿		
		唐 788	鲍鉐銜	銖 銓 銛	鉚 鋏	銹 銷		
		臀 789 臓 790	鋩 錏 婉 錙 錢	鍄 錮 爭 錣 錺	錵錻	鍜鍠		
		舊 791	鍼鍮鍖	對 频 奶		^{取 延} 鏖 鏗		
715 舍 舐 舖 舩 舫	舸舳艀艙	艘 792	鏨鏥鏘	鏃鏝鏐	鏈鏤	鐚鐔		
		艱 793	鏉鐃鐇	鐐鎱鐫		鐺鑁		
		苡 794 苹 795	鑒 鑄 鑛 鑷 鑽 鑚	樂鑢鑞鑼鑼鑾钁		鑰 鑵 閇 問		
719 苞 茆 苜 茉 苙		796	関 閖 閘	開盟閨		閼 閻		
720 茵茴茖茲		荅 797	閹闞闊	濶 闃 闍	闌闕	闔闖		
		莖 798 莉 799	關 闡 闥 陏 陋 陷	闢 阡 阨 陜 陞	阮 阯	陂 陌		
		利 /99 菁 800	隋 陋 陷 陝 陟) 所 座) 际 陲 陬	隍 隘	隕 隗		
724 蒂 萇 菠 菲 萍 3	萢 萠 莽 萸	蓤 801	險隧隱	隲隰隴	隶隸	隹 雎		
		葭 802	雋 雉 雍	襍 雜 霍		霄霆		
	施 萵 蓊 葢 蓚 蓐 蓁 蓆	兼 803 蓖 804	霈霓霎	霑 霏 霖 靄 靆 靈	寒 雷 震 靉	霪 霰 靜 靠		
		童 805	₽ 聲 壅 跑 靦 靨	調 ^越 墨 勒 靫 靱		₱ 難 鞁		
729 蓼 蕀 蕣 蕘 蕈		806	靺 鞆 鞋	鞏 鞐 鞜		鞣鞳		
	薀薤薈薑	薊 807	鞴韃韆	韈 韋 韜		韲 竟 頽 蹈		
		薐 808 藹 809	韶 韵 頏 顏 顋 顫	頌 頸 頤 顯 顰	頡 頷	頽 顆		
733 蘊 蘓 蘋 藾 藺		蘿 810	顱顴	顳颪颯	颱颶	飄飃		
		蚪 811	飆 飩 飫	餃 餉 餒		餡 餝		
		蚫 812 蜈 813		餬 餮 餽 饒 饌 饕		饉 饅 馥 馭		
		蜿 814	區 頁 頭 馮 馼 駟			酸酸酸		
738 蜷蜻蜥蜩蜚!		蝎 815	駲 駻 駸	騁 騏 騅	駢 騙	騫騷		
739 蝴 蝗 蝨 蝮 蝙	xx 100 1An at-	816	驅驂驀	驃 騾 驕		驗驟		
		蟋 817 螻 818	驢驥驤 髏觸髓	驩驫 麗 體 影		骼 髀 髦 髯		
		蟒 819	髫 髮 髴	髱 髷		~ "		
		蠻 820	髻 鬆	复鬚蟹	鬢鬣	鬥鬧		

Note

· The characters listed on the Kuten Code list may appear differently from the characters displayed on your handset.

Combinations of Multiaccess Functions

New Communication	Voice	e Call	Video	o Call	i-mode	i-mod	e Mail
Current Status	Outgoing	Incoming	Outgoing	Incoming	Connecting	Sending	Receiving
Voice Call	△*1*2	∆*1*2	×	×*2*5	0	0	0
Video Call	×	×*2*5	×	×*2*5	×	×	×
i-mode	0	0	×	×*4*5	×	0	0
Packet Communication (Data Communication)	0	0	×	×*4*5	×	×	×
64K Data Communication	×	\times^{*5}	×	\times^{*5}	×	×	×

New Communication	SI	NS	i-appli	Communic	ket ation(Data nication)		Data nication
Current Status	Sending	Receiving	Outgoing	Sending	Receiving	Sending	Receiving
Voice Call	0	0	×	0	×	×	×*5
Video Call	0	0	×	×	×	×	\times^{*5}
i-mode	0	0	×	×	×	×	×*5
Packet Communication (Data Communication)	0	0	×	×	×	×	×*5
64K Data Communication	×	⊖*3	×	×	×	×	×*5

 \bigcirc : Available \times : Not available \triangle : Available in some cases

*1: If you subscribe to the Call Waiting service, you can place the active call on hold to make/answer another call.

*2: If you subscribe to the Voicemail service or Call Forwarding service, the incoming call can be treated in accord with the network service.

*3: When it is received, a (yellow) appears at the top of the screen, however, the Reception result screen will not open nor you can view it.

*4: May be available in some specific areas overseas.

*5: Not registered in the Received calls list.

Combinations of Multitask Functions

Multitasking is available by selecting/pressing "SWAP" of the Function menu or a Soft Key from a specific screen. \rightarrow P258

Another Application to Add Active Application	Voice Call	Video Call	Phonebook	Mail	i-Channel	i-mode	Datebook
Voice Call	O*1	×*2	0	0	0	0	0
Video Call	×*2	×*2	0	○*3	×*4	×*5	0
Mail	0	○*3	0	-	×	×	0
i-Channel	0	×*6	0	×	-	×	0
i-mode	0	×*7	0	×	×	_	0

○: Concurrently available.

 \times : Not concurrently available.

-: Options to return to the application display appear.

*1: Available if you subscribe to the Call Waiting service.

*2: A confirmation screen asking whether to make a call after terminating the active call opens. Press 👍 [Yes] to make a voice/video call. Press 🕩 [No] to cancel dialing, and the call is recorded in Dialed Calls.

*3: You can send only SMS. Although you can create other types of mails, you cannot send them.

*4: If you have obtained the channel information in advance, the Channel list screen can be opened. However, you cannot visit a web site by selecting a channel item.

- *5: Although you can open the i-mode menu screen, you cannot visit a web site.
- *6: Although you can make a video call, you cannot perform communication by switching to i-Channel.
- *7: Although you can make a video call, you cannot perform communication by switching to i-mode.

Services Available from FOMA Handset

Services		Phone number
Collect call (Charges apply to the receiver)		(No prefix) 106
Directory assistance of fixed line phones and DoCo (charged) (No assistance provided for subscribers not listed)	Mo mobile phones	(No prefix) 104
Telegraph (charges apply: telegram fee)	8:00 a.m. to 10:00 p.m.	(No prefix) 115
Time check (charges apply)		(No prefix) 117
Weather forecast (charges apply)		Area code+177
Police emergency		(No prefix) 110
Fire and ambulance		(No prefix) 119
Marine emergency call and accident reports	(No prefix) 118	
Message Dial for disaster (charges apply)	(No prefix) 171	

Note

- If you use collect call service (106), the receiver of a call is charged for the call cost and commission of ¥90 (¥94.5 including tax) per call (as of November, 2006).
- When you use directory assistance service (104), you are charged for a call cost and service charge of ¥100 (¥105 with tax included). This service is provided free of charge for those visually impaired or physically disabled in the upper body. For details, contact at 116 (NTT sales contact) from a fixed line phone (as of November, 2006).

339

- For a call to 110, 119 or 118 from FOMA handset, the originating location cannot be identified. Because the police
 or fire department may try to contact you, inform them that you are calling using a mobile phone and give your phone
 number and detailed information of the place you are. Do not move while you are talking over a call to prevent it from
 being terminated unexpectedly. Do not turn the power OFF immediately after the call is over; keep FOMA handset
 ready to receive calls for approximately 10 minutes.
- Depending on the area you are calling from, you may not be connected to the local police or fire department. In such case, use a public phone or fixed line phone nearby.
- When you use "Call Forwarding" of fixed line phone and have specified a mobile phone as its forwarding destination, the caller may hear a ring tone even if the mobile phone is busy, out of the service area or power OFF depending on the settings of the fixed line phones and mobile phones.
- Services such as call to 116 (NTT sales center), Dial Q2, Message Service and credit card calls are unavailable. (Credit card calls can be made from a fixed line phone or public phone to FOMA handset.)
- Even when the UIM card is not inserted, emergency phone numbers (911, 999, 112, 000, and 08) can be dialed to
 make an emergency call overseas. However, when the Self Mode is set to "On", emergency calls cannot be made.

Options and Related Devices

Using FOMA handset with various option devices makes it applicable to diversified fields covering personal to business usages. Some of the products listed below may be unavailable in some areas.

For details, contact a service counter such as DoCoMo shop. For details of option devices, see the related operation manuals.

- Battery Pack M02
- Rear Cover M02
- FOMA AC Adapter 01
- FOMA Overseas/Domestic AC Adapter 01
- FOMA DC Adapter 01
- In-Car Handsfree Kit 01*1
- FOMA Dry Cell Battery Adapter 01

- FOMA USB Cable
- FOMA miniUSB Conversion Adapter M01
- miniUSB Stereo Headset M01
- Bluetooth Headset F01*2
- Bluetooth Headset AC Adapter F01
- FOMA In-Car Handsfree Cable 01
- Carry Case S01

*1: Connect via Bluetooth. To charge by USB connection, FOMA In-Car Handsfree Kit 01 is required. *2: Bluetooth Headset AC Adapter F01 is required.

Data Link Software

You can transfer data such as Contacts, mail, images or i-motion movies between the FOMA handset and a PC connected to the FOMA handset with a FOMA USB Cable (optional) using the "FOMA M702iG Data Link Software".

You can download the "FOMA M702iG Data Link Software" from Motorola's web site. ■ URL for Downloading

http://motorola.jp/hellomoto/ M702iG/default.htm

For details about downloading, transferable data, operating environments, operations or limitations, visit the above web site.

Supported Operation System

Japanese version of Windows XP and Windows 2000

Exclusion of Liability

- Motorola Inc. (hereafter "we") does not bear any legal liability for defects including failure of this software to operate properly. Also, we do not guarantee the functionality of this software and its fitness for any particular purposes of the customer.
- We assume no responsibility for any issue caused by this software or related manuals, but the users are supposed to solve all the above issues at their own responsibilities and costs.

Inquiry about "FOMA M702iG Data Link Software"

Motorola Inc. Customer Hot Line

00 0120-227-217

The above number is also available from a mobile phone or PHS.

Office Hours: 9:00 am to 6:00 pm on weekdays (excluding Saturdays, Sundays and Holidays)

Note

 You need a PC connected to the Internet to download the software. Separate communication charges may apply for the download.

Video Play Software

You need Apple Computer Inc.'s QuickTime Player (free of charge) Version 6.4 or higher (or Version 6.3 + 3GPP) to play videos (in MP4 file format) captured with the FOMA handset on a PC.

You can download the QuickTime Player from the following web site: http://www.apple.com/jp/quicktime/download/

Note

- You need a PC connected to the Internet to download the software. Separate communication charges may apply for downloading.
- · For details about operating environment, downloading or operations, visit the above web site.

Troubleshooting

Symptom	Check
The FOMA handset cannot be powered on (the FOMA handset cannot be used)	 Is the battery pack inserted correctly? →P41 Is the battery pack charged? →P44 If mova is enabled under the Dual Network service, some FOMA services are not available. Check whether FOMA is enabled. For details, refer to "Mobile Phone User's Guide [Network services] ". →P284
A call cannot be made even if the Dial Keys are pressed	 Are Dialing Restrictions set? →P135 Is Phone Lock set? →P131 Is Self Mode set? →P132
After a call is dialed, a busy tone sounds and the call cannot be connected	 Did you enter the city code? →P52 Is the phone out of the service area? →P47
The icon indicating the network status remains out of the service area and "Call Failed" is displayed	 Are you out of the service area, or in the week/poor radio wave reception level? →P47
The Unlock Code entry screen is open on the Wallpaper screen	Is Phone Lock set? →P131
Pressing the Sidekeys while the FOMA handset is closed does nothing	 Is Sidekey Lock set? →P136
The low battery alert, "pico", sounds	 The battery level is low. Charge the battery pack. →P44

Symptom	Check
Charging is not available (The charging light of the FOMA handset does not light. "Unable to Charge" or "Unspecified battery pack" is displayed)	 Is the battery pack inserted correctly? →P41 Is the adapter power plug correctly connected to the outlet? Is the FOMA miniUSB Conversion Adapter M01 (Accessory) correctly connected to the FOMA handset? Is the adapter correctly connected to the FOMA miniUSB Conversion Adapter M01? →P44 Is "Charging Lights" set to "Off"? →P126
The Display becomes dark and nothing is displayed	 Is the Display Timeout set? →P125
A different ringtone sounds for incoming mail	 Is the sender saved in the Phonebook with a different ringtone? →P94 Is the sender saved in the Phonebook under a category with a different ringtone assigned? →P98 Has the "Profile" changed? →P112
A different Illumination Indicator blinks for incoming call or mail	 Is the sender saved in the Phonebook under a category with a different Light ID assigned? →P99
Images or melodies set for function do not work and default settings are used	 Is the same UIM installed that was inserted when images or melodies were obtained? →P40
The accumulated call charges do not increase	 Have you exceeded the call charge maximum (approx. ¥16,770,000 yen)? Reset the accumulated call charge to restart counting. →P267
"UIM Card not recognized" appears on the Wallpaper screen and does not disappear	 Is the UIM card inserted correctly? →P39
"Call Failed Please Wait" appears	 Audio line/packet communication facility failed, or audio line/packet communication network is extremely busy. Try again later.
"Video Call Failed Please Wait" appears	
"Connection failed" appears and i-mode mail and SMS cannot be sent	

When overseas

Symptom	Check
The icon indicating the network status remains as out of service, and the international roaming service is not available	 Are you out of the international roaming service area, or in a location with weak radio wave reception? Check whether you are in an available service area and whether you are using a carrier listed with the "DoCoMo WORLD SERVICE User's Guide" or DoCoMo's "international service web site". Switch to an available network. →P314
Video calls, i-mode mail, SMS, and packet communication are not available	 Check whether you are in an available service area and whether you are using a carrier listed with the "DoCoMo WORLD SERVICE User's Guide" or DoCoMo's "international service web site". Switch to an available network. →P314
Calls or mail cannot be received	 Is Call Barring Roaming activated? →P315
After returning to Japan, the network status icon still shows out of service area	 Is "Band" set to "GSM 900/1800" or "GSM1900"? →P313

Error Messages

Action Not Allowed A valid SIM card is needed to perform this Action.

Operation cannot be completed because the UIM is not inserted properly or invalid UIM is inserted. Insert the valid UIM and try again.

Address is not valid. (451)

The mail was not sent. Verify the address and try again. \rightarrow P184

Alarm Clock Full

No new alarm can be set because 5 alarms have already been saved. Delete unnecessary alarms and save. → P260

All Contacts will be deleted. Continue?

If you perform infrared communication, the phonebook saved on this FOMA handset will be deleted. Press (h) [Yes] to continue.

All folders are full.

Mail/SMS and Message R/F cannot be received because the Inbox is full, there is not enough memory space, or the maximum number of Message R/F has already been saved. Delete unnecessary data or unprotect the mail/SMS or Message R/F.

All protected. Unable to delete

All files cannot be deleted because they are protected. Unprotect files and delete them. → P167, P173, P198, P199, P200, P200

Already connected. Unable to receive.

The i-mode service is not available during communication. Terminate the communication and try again.

Already connected. Unable to send.

Cannot send during communication. Terminate the communication and try again.

Already downloaded by different UIM. Overwrite?

Application Failed: Battery Is Too Low

The software cannot be updated because the battery level is too low. Fully charge the battery pack and try again.

Application Failed: Other Functions Are Running

Because other function is running, the software cannot be updated. End the running function and try again.

Application Failed: Server Is Busy

You made a call by selecting a dialed/received call that a phone number is note registered or when dialed/received call is not registered.

Application Failed: Software Version Too Old

 The software cannot be updated because the update period has expired. Contact a service counter such as DoCoMo shop.

Application Failed: Validation Error

The software cannot be updated because a check of the downloaded file failed. Try again later.

Attached Signature is disabled.

The signature cannot be added because with the signature, the number of characters in the message will exceed the maximum allowed. Delete some of the message text.

Attempt to retrieve channel information failed.

i-Channel information could not be obtained. Try again at a location with stronger radio wave reception level.

Authentication failed.

- An incorrect session key has been entered. Enter the correct session key.
- An incorrect Security Code was entered when attempting to send all Contacts or you pressed im [Cancel] when entering the Security Code or Password.
 Enter the correct Security Code or try again.

Authentication type is not supported. (401)

A connection cannot be established because of an unsupported authentication type.

Bluetooth Link is Busy Make sure you are not connected to another Bluetooth device and try again later

The device search is not available because the handset is currently connected to a Bluetooth device. Try again after terminating the connection.

Bookmark has already registered. Overwrite?

Bookmark with the same URL has already been saved. Select . [Yes] to overwrite, and . [No] not to register.

Busy. Try Again Later.

- The Schedule cannot start because the FOMA handset is processing data at power up. Try again later.
- You attempted to activate a function unavailable during a call.

Call Failed

The connection was terminated by the host.

Error Messages

Call Forwarding Already Active

You attempted to activate Call Forwarding service when it was already activated.

Call Forwarding Denied

You attempted to activate Call Forwarding without the subscription to the Call Forwarding service.

Call Waiting Denied

You attempted to activate the Call Waiting service without subscription to the Call Waiting service.

Caller ID Request Already Active

You attempted to activate Caller ID Request service when it was already activated.

Cannot connect Credit Limit exceeded

Calls cannot be made because the call cost limit has been exceeded. Change the setting of "Credit Limit" or perform "Reset All Calls". → P267, P268

Cannot Create Phone memory and SIM Card are full

The Contact cannot be saved because the memory space on the FOMA handset and UIM are full. Delete unnecessary Contacts and try again. →P107

Cannot Delete Number set as Auto-Inserted Country Code.

Cannot delete because this is a Country Code set to be added automatically.

Cannot Delete Number set as Auto-Inserted Intl Access Code.

Cannot delete because this is an international access number set to be added automatically.

Cannot Delete The last piece of information stored for a contact cannot be deleted.

At least 1 phone number, mail address, URL or postal address is required to save a Contact, so the selected item cannot be deleted.

Cannot execute because of Low Battery.

The Scanning Function cannot start because the battery level is low. Charge the battery pack fully and try again.

Cannot execute because of other tasks

Because other function is running. the Scanning Function cannot be activated. Terminate the running function and try again.

Cannot Save: A number or at least one type of address is required.

The Phonebook entry cannot be stored because required information is not entered. Enter any of phone number, mail address. URL or postal address.

Cannot Save A number or email address is required.

The Phonebook entry cannot be stored because required information is not entered. Enter any of phone number or mail address.

Cannot Save: Name Required

The Phonebook/Category cannot be saved because a name has not been entered Enter a name

Cannot start dictionary.

The electronic dictionary cannot start due to an error. Try again.

Cannot use Scanning Function

Failed to start Scanning Function. Try again.

Card Error:

- Connection (communication) cannot be established to the web site because of UIM operation restriction function.
- · Verify that the correct UIM is inserted. → P39
- The UIM has an error. Contact a service counter such as a DoCoMo shop.

Certificate is rejected. (tampered)

The connection cannot be established because an altered SSL certificate is received.

Changed: Time has been adjusted for **Daylight Savings.**

Time and date setting and the Datebook/Task time were adjusted to Daylight Saving Time.

ChatMail member cannot register fully.

5 members have already been saved as chat members. No more members can be registered. Delete some chat members and register others. → P204

Check New message all invalid

No items for "Check New Message" are checkmarked. Checkmark the items to check and try again. → P201

Clock

The clock cannot be changed to analog when the Calendar Wallpaper is turned on.

"Clock" of the "Home Screen" cannot be changed because "Calendar" of the "Wallpaper" is set to "On".

Close Applications Please close all applications before starting Self Mode.

Self Mode cannot be set to "On" because communication is in progress. Terminate the communication and try again.

Error Messages

Communication Traffic Increases Continue Operation?

This message appears when the traffic from the i-appli becomes extremely heavy during a certain period of time. Press _____ [Continue] to continue the i-appli communication, and _i= [Exit] to end.

Completed Date Earlier than Start Date

The task cannot be saved because the End Date is set earlier than the Start Date. Change the Start or End Date.

Completed Date Earlier than Start Date

The task list cannot be saved because the Completed Date or End Date is set earlier than the Start Date. Change the Completed or Start Date.

Connection Failed

The software cannot be updated because of the connection failure to the server. Try again later.

Connection failed.

- Cannot connect because the destination address specified in "Host Setting" is wrong. Verify the setting and try again. →P171
- Connection cannot be established due to weak radio wave reception level. Try again at a location with stronger radio wave reception level.
- The Scanning Function or Software Update cannot be used because the handset is out of the service area. Move to a place with stronger radio wave reception level and try again.

Connection failed. (403)

A connection cannot be made to the site. Try to connect again.

Connection failed. (562)

Connection with the i-mode center failed. Move to a location with stronger radio wave reception level and try again.

Connection interrupted.

The connection was terminated because of a busy line or communication error. Try again later.

Connection is limited right now. Please use after a while.

- Packet communication such as i-mode mail or i-mode connection is not available because the usage of the FOMA handset is restricted. Try again later.
- If you use Pake-Hodai, connection may not be established for a certain period of the after vast communication within a certain time was performed. Try again later.

Connection Suspended

The connected Bluetooth device interrupted the communication, or rejected the data exchange.

Copy failed, due to too long URL

The URL has too many characters to save. Up to 256 half-pitch characters can be copied.

Could Not Scan. Try Again

Scanning could not complete because 30 seconds elapsed. Try again.

Could not start the barcode reader.

The Barcode reader could not start due to an error.

Create on Phone? UIM Card is full.

Create on Phone? UIM Card is full.

Credit Failed Not Available

- *: "Cannot access" may appear depending on the situation.
- A call failed due to poor radio ware reception level. Press .
 [Reconnect] to redial.
- Outgoing restrictions. Try to connect again later

Data cannot be saved.

This is a type of i-motion that cannot be saved on this FOMA handset.

Data exceeds i-motion replay size

The data could not be obtained because it exceeded the maximum size.

Device List Empty No stored Bluetooth devices

There is no Bluetooth device saved in the device list.

Dialing Restriction Calls can only be placed from Phonebook

You attempted to make a call using a function other than Phonebook when "Dialing Restriction" is set to "On". Set "Dialing Restriction" to "Off" and try again. →P135

Download canceled.

i-mode was terminated because the reception level is too low. Move to a place where the radio wave reception level is strong (Tut) enough and try again.

Download failed.

- An error occurred while downloading the updated software. Try again later.
- Download failed because another application is running or an error occurred.

Dual Network Active

You attempted to switch to the FOMA network when the Dual Network service was already switched to FOMA.

Dual Network Service Denied

You attempted to activate the Dual Network service without the subscription to the Dual Network service.

Duplicate Name: A Category with this name already exists. Please enter a different name.

The entered Category name has already been registered. Enter a different name.

End Before Start An event cannot end before it begins.

The Schedule event cannot be saved because the End Time is set earlier than the Start Time. Change the Start or End Time.

Enter Correct Network Security Code

An incorrect Network Security Code was entered. Enter the correct Network Security Code.

Frror

Network service cannot be activated because of a wrong service code or phone number.

Error

Network service settings check failed. Try again.

Error in image. Does not work correctly.

A Flash movie is not played properly because an error occurred while playing.

Error Message Self Mode is Set

Because the Self Mode is set to "On", i-mode or i-Channel communication is not available and mail cannot be sent. Set the Self Mode to "Off" and try again. →P132

Frror Secret Code must be 4 digits 0001 - 9999.

Connect Secret Code has not been entered. Enter a 4-digit number from 0001 to 9999.

Error: Cannot Delete All Message Memos Are Locked.

The selected message cannot be deleted because it is protected. Unprotect the message and try again.

Event overlaps! XXXXX*

*: The subject and starting time and date for the overlapping event will be displayed.

Press [h] [Edit] to change the Schedule event, or press [Yes] to save.

Exceeded limit. Delete oldest entry and Register last caller?

30 phone numbers have been already registered. Press [Yes] to delete the oldest entry and register the latest phone number to reject.

Excess characters deleted.

Because you attempted to enter characters exceeding the maximum number (20 digits) of enterable characters, exceeded characters were deleted.

Failed

The operation is not available because an error occurred during the operation on the dual network service. Try again.

Field(s) Not Supported Unrecognized or unsupported field(s) will not be displayed.

The received Phonebook entry. schedule event. or task contains unrecognizable data.

File is too large to mail. Save anyway?

The edited i-motion movie will be saved in a file that is too large to be attached to mail. Press [Yes] to save the i-motion movie.

File restricted image deleted.

An image with protection was deleted. An image cannot be quoted to into a template.

File Type Not Recognized

This file cannot be received because this is a file type that cannot be recognized on this FOMA handset

Folder is full.

Message R/F cannot be received because the maximum number of Message R/F has already been saved, or there is not enough memory space. Delete unnecessary data or unprotect the Message R/F.

Full

Schedule events/tasks of the maximum number have been saved. Delete unnecessarv Schedule events/tasks. → P264

i-appli stand-by display terminated due to security error.

The software attempted an invalid operation. The i-appli stand-by screen has been cancelled. Check the Security error history. → P218

i-appliDX may use saved data and terminal and UIM ID. Download?

This message appears when the information provider needs to identify you with the "Serial Number of Mobile Phone/UIM". The "Serial Number of Mobile Phone/UIM" is sent via the Internet and it may be perceived by a third party. This operation does not send your mobile phone number. postal address, age, or sex to the information provider. Select [Download] to connect.

i-appliDX may use saved data. **Download?**

The downloaded application will use data (Contacts, Bookmarks, or Schedule events, etc.) saved on vour handset. Select [Download] to download.

Illegal Character

• is pressed without entering any character on the reading entry screen. The word cannot be registered to the user dictionary. Enter a reading.

Error Messages

Illegal Character

 is pressed without entering any character on the reading entry screen. The word cannot be registered to the user dictionary. Enter a reading.

i-mode Center is busy. Please try again later.

The line is very busy. Try again later.

i-mode mail service is busy. Please try again later

The line is very busy. Try again later.

Inbox is full.

- Mail/SMS cannot be received because the Inbox is full or there is not enough memory space.
 Delete unnecessary data or unprotect the mail/SMS.
- SMS saved on the UIM cannot be moved/copied to the FOMA handset because the Inbox is full or there is not enough memory space. Delete unnecessary data or unprotect the mail/SMS.

Incorrect Passcode SIM PIN login attempts remaining:*

*: The remaining number for entry is displayed.

An incorrect UIM PIN has been entered. Enter the correct UIM PIN.

Incorrect Passcode UIM PIN2 login attempts remaining: X*

*: The remaining number for entry is displayed.

An incorrect UIM PIN2 has been entered. Enter the correct UIM PIN2.

Infrared Aborted

The Infrared communication was canceled due to the low battery level of the FOMA handset. Charge the FOMA handset battery pack. \rightarrow P44

Input error. (205)

There is a problem with the entered data. Check the entered contents and try again.

Insert UIM

- The UIM has not been inserted. Insert the UIM and try again.

Insufficient Space. Delete another.

The data cannot be downloaded because the memory space on the FOMA handset is full. Delete unnecessary files or select files to delete to make necessary memory space available.

Insufficient Storage Space on Device

- An i-motion movie cannot be saved due to insufficient memory space. Delete unnecessary software. → P234, P235
- Capturing with the Camera/ Video camera is not possible due to insufficient memory space. Delete unnecessary software.

International Roaming Service Denied

- You attempted to operate the Roaming Guidance without subscription to the Roaming Guidance.
- You attempted to operate the Call Barring - Roaming without the subscription to the WORLD WING.

Invalid characters shall be omitted during paste operation.

Because copied/cut text contains characters that cannot be pasted, the text cannot be pasted.

Invalid data

Connection cannot be established.

An error occurred at the destination and the connection cannot be established properly.

Invalid Data is Contained.

The scanned data contains data not supported by the FOMA handset. It cannot be recognized.

Invalid Data.Data size is not supported

The dictionary cannot be downloaded because the data size is invalid.

Invalid Date: Please enter date between XXXXX* and XXXXX*

*: The day, month and year are displayed.

An invalid date was entered when saving/copying a Schedule event or task. Enter the date again.

Invalid file

The dictionary cannot be downloaded because the dictionary is invalid.

Invalid File. (493)

The obtained file is corrupt and cannot be operated.

Invalid name!

The entered title for the downloaded dictionary is invalid.

Invalid PIN

PIN must contain at least 1 characters.

The entered passkey cannot be validated. Enter the correct passkey.

Invalid PIN Try Again Later

The entered passkey is incorrect, or you pressed in [Cancel] during the passkey authentication. Enter the correct passkey or try again.

Invalid Security Code(6)

An incorrect Security Code has been entered. Enter the correct Security Code.

Invalid UIM Requested file cannot be played.

The file with UIM Restrictions cannot be played because a different UIM is inserted from when the file was saved. Insert the original UIM and try again.

Invalid UIM, requested service not available.

Operation cannot be performed due to UIM Restrictions. Insert the original UIM and try again.

Invalid: Invalid Email

An incorrect mail address has been entered. Verify the entry such as the domain.

Invalid: Invalid Email @ Required

@ has not been entered in the mail address. Enter "@".

Mails could not be sent to the following address. (561)

Mail could not be sent to the displayed addresses.

Manner Mode Enabled. Do You Want Audio?

The FOMA handset is set to Manner Mode. Press $\boxed{}$ [Yes] to play a video or melody with audio.

Maximum already entered!

A new item such as a word cannot be saved because 200 items have already been saved. Delete unnecessary words, etc. and try again. → P303

Maximum Exceeded Maximum categories allowed: 10

A new category cannot be saved because 10 categories have already been saved. Delete unnecessary categories and try again. \rightarrow P99

Maximum number of mail folders exceeded.

Message i-appli cannot be downloaded because the number of folders in the Inbox reached its limit. Delete unnecessary folders and download. ->P197

Memory Full! Copy UIM to Phone: X/X*

*: The "Number of items copied/ Number of items to be copied" will be displayed.

The Phonebook entry cannot be copied because the memory space on the FOMA handset is full. Delete unnecessary contacts and try again. \rightarrow P107

Memory Full: Contacts cannot be copied to Phone.

The Contact cannot be copied because the memory space on the FOMA handset is full. Delete unnecessary Contacts and try again. \rightarrow P107

Memory Full: Contacts cannot be copied to UIM Card.

The Contact cannot be copied because the memory space on the UIM is full. Delete unnecessary Contacts and try again. \rightarrow P107

Memory Full: Contacts copied from Phone to SIM Card:X/X*

*: The "Number of items copied/ Number of items to be copied" will be displayed.

The Contact cannot be copied because the memory space on the UIM is full. Delete unnecessary Contacts and try again. \rightarrow P107

Memory Full! Delete Old Msgs.

No more mails/messages can be received because the maximum number of received mails/ messages has already been saved. Delete unnecessary received mails/messages and try again. →P173, P174, P199, P199, P200

Memory is full! Need more storage space to update Databox. Delete Files?

- The data cannot be downloaded because the memory space on the FOMA handset is full. Select
 A [Yes] to specify files to delete.
- The Databox cannot be opened because the memory space on the FOMA handset is full. Select

 (Mathematical Select)
 (Mathematical Select)
 (Mathematical Select)
 (Mathematical Select)

Message entry size exceeds limit. Delete message.

The maximum number of characters which can be entered in the message text has been exceeded. Delete some of the message text.

Message not entered. Unable to save

A mail without (Address), (Subject) or ((Message) entered, and without attachment cannot be saved.

Message Keypad dial is locked.

You attempted to create and send mail using a function other than Phonebook when "Dialing Restriction" is set to "On". Set "Dialing Restriction" to "Off" and try again. → P135

Message Not enough memory.

i-mode is not available because of insufficient memory on the FOMA handset. End other running functions and try again.

MessageF cannot be received overseas. Cancel the MessageF setting from Check New Message of the phone. (566)

MessageF cannot be checked overseas. Deselect "MessageF" from the items under "Check new message". \rightarrow P201

Multi Number Denied

You attempted to activate Multi Number without the subscription to Multi Number.

Name Required

- The international access code cannot be saved because a name has not been entered. Enter a name.
- The country code cannot be saved because a name has not been entered. Enter a name.

Network Busy

- An error occurred while searching for networks. Try again.
- An error occurred when the found network was configured manually. Try again.

Network Clock Not Set Time-protected content not available until network sets clock.

A copyright protected file with an expiration time cannot be played because the network time is invalid.

Network List Full

Because the preferred network list is full, a network cannot be added/ registered/inserted. Delete unnecessary networks from the preferred network list and try again. → P315

Network Time Not Available

Because the network time information is not available, the setting in "Auto Update" cannot be changed.

Networks Not Available

Network search failed. Try again.

No action

Action list screen cannot be displayed because the FOMA handset is set to an unavailable action mode. Set to an available action mode and try again. → P82

No content is available. (204)

The connected site does not have data for display.

No data was entered.

Some information cannot be entered due to an error in the message text or attachment.

No Devices Found Try Again Later

Bluetooth device search failed. Try to operate again.

No Duplicate Alarm Time Allowed

An alarm has been already set for the same time. Change the time.

No mail message found

No mail matches the selected search keys.

No match found

The electronic dictionary does not have the headword that matches with the entered word.

No memory space in Phone or UIM. To receive SMS messages, delete messages no longer required

SMS cannot be received because the Inbox is full, there is not enough memory space, or storage space on the UIM is not enough. Delete unnecessary data or unprotect the mail/SMS.

No recent entry found.

The electronic dictionary does not have a search log entry.

No Requested File. (492)

The selected file does not exist on the FOMA handset.

No response (408)

Connection cannot be established because the site does not respond. Try again.

No Subject

This event needs a Subject in order to be stored.

The schedule event cannot be saved because no subject has been entered. Enter a subject

No Task A Task is required in order to be stored.

The task cannot be saved because the name of Task has not been entered. Enter the task.

Not Available

You made a call by selecting a dialed/received call that a phone number is note registered or when dialed/received call is not registered.

Not compatible.

- Download cannot be performed because there is an error in the software data.
- The software you attempted to download or update is not applicable to this FOMA handset.

Not enough room provided.

No more software can be saved due to a shortage of software storage space. Delete unnecessary software. → P218

Not Found

No service dial corresponding to the entered number.

Not Saved Bluetooth device list full

A new device cannot be saved because the device list is full. Delete unnecessary devices from the list and try again. \rightarrow P275

Nuisance Call Barring Service Denied

You attempted to activate Nuisance Call Barring service the subscription to the Nuisance Call Barring service.

Number Required

The country code cannot be saved because it has not been entered. Enter a country code. \rightarrow P311

Number Required

The international call detail settings cannot be saved because an international access code has not been entered. Enter the international access code.

One or more folders have a security setting. Continue and delete all the messages in these folders?

Some folders have security settings. Press - [Yes] to delete, and INol not to delete.

Operation Failed

You attempted to make another call during a call without subscription to the Call Waiting service

Outbox is full.

- New mail/SMS cannot be created because the Unsentbox is full or there is not enough memory space. Delete unnecessarv mail/SMS. →P198. P199, P200
- · Mail/SMS cannot be replied to or forwarded because the Unsentbox is full or there is not enough memory space. Delete unnecessary mail/SMS. →P198, P199, P200

Page is not found. (404)

The site does not exist, or the URL may be wrong. Verify the URL and try again.

Pasting To Editor Limit

Not all text can be pasted because the maximum number of enterable characters will be exceeded.

Pattern Definitions are Up-to-Date.

The pattern definition is the latest and does not require update.

Personal User Information Not Available

My Personal Info cannot be displayed because an improper UIM is inserted. Insert the proper $UIM \rightarrow P39$

Picture Cannot be Forwarded. [XXXXX]* The ability to forward this file is restricted.

*: The file name appears.

Because unsendable file is included, the file will be deleted before the phonebook is sent via Bluetooth/Infrared.

Picture Could Not be Attached XXXX* The picture is in an unsupported file format.

*: A file name appears.

Because a file in an unavailable format to be sent is included, a Phonebook entry is sent via Bluetooth/Infrared after the file is deleted.

Picture frame is not supported.

The picture frame is not supported and cannot be saved.

Please input address.

An address (m) for mail or SMS has not been entered. Enter the address then send. →P184, P206

Please set date before updating.

The scanning function cannot start because date and time have not been set correctly. Set the date and time and try again. \rightarrow P48

Please set the clock to obtain data

The data cannot be obtained because the clock has not been set. Set the clock and obtain the data →P48

Please Try Again

An incorrect Unlock Code has been entered. Enter the correct Unlock Code.

Protected mail included in folder. Unable to delete.

The folder cannot be deleted because protected mail is included in the folder. Unprotected and delete the folder. → P198, P199, P200 P200

Protected screen memo is included in folder. Unable to delete folder

The folder cannot be deleted because it contains protected screen memos. Unprotect the screen memos and delete the folder. →P166

Protected. Unable to delete.

Found data in Warning level 3 or level 4 cannot be deleted.

PUK1 login attempts remaining:X*

*: The remaining number for entry is displayed.

An incorrect PUK code has been entered. Enter the correct PUK code

Receive option set to ON. Unable to start

ChatMail is not available when "Download Selected Mail" is set to "On" Set "Download Selected Mail" to "Off". → P201

Receiving data exceeds replay able size for i-motion

The data cannot be obtained because it exceeds the maximum size

Register the Forwarding Number

The forwarding number cannot be changed because of the different service code or phone number.

Registration Failed!

Because registration is failed, the incoming number could not be registered to the reject list. Try again.

Registration is in progress. (554)

The operation is not available because the user is being registered. Try again later.

Remote Control Already Active

You attempted to activate Remote Control when it was already activated.

Remote Control Inactive

You attempted to deactivate Remote Control when it was already deactivated.

Remotely Controllable Services Denied

You operated the Voicemail service or Call Forwarding service using remote control without subscribing to these services.

Requested file cannot be played.

This is an i-motion that cannot be played on this FOMA handset.

Requested Software not Available.

This i-appli is not supported by the FOMA handset and cannot start.

Requested software unavailable

An error occurred in the i-appli and it cannot start.

Reservation activation was not possible because power was off.

The FOMA handset was not turned on at the reserved date/ time. The software could not be updated. Press ____ [Update] and enter the Security Code to try software update again.

Reservation Not Available

The software update cannot be reserved because the reservation is full at that time. Try to change the reservation to another date/ time.

Reservation not available for the chosen time-slot.

The software update cannot be reserved because the selected reservation time is full. Try to change the reservation to another date and time.

Reset of the learned data failed

The learned data could not be reset. Try again later.

Rewriting is complete. Retry Software Update Later

After the completion of rewriting the software, the notification to the server failed. Try again later.

Roaming Guidance Active

You attempted to activate Roaming Guidance when it was already activated.

Roaming Guidance Inactive

You attempted to deactivate Roaming Guidance when it was already deactivated.

Root certificate is not valid.

The SSL certificates is set to invalid. Set the SSL certificate to valid. \rightarrow P174

Security Code Incorrect(6). Try Again

An incorrect Security Code has been entered. Enter the correct Security Code.

Security is now set

The mail-linked i-appli you are about to download is already saved in the Inbox and security is set to the folder. To overwrite, press \boxed{A} [OK] Enter the Security Code.

Self Mode is On Action Not Allowed

The operation cannot be performed when Self Mode is set to "On". Set Self Mode to "Off" and try again. \rightarrow P132

Self mode is set

Because Self Mode is activated, all communication functions including phone, mail, and i-mode are not available. Set Self Mode to "Off" and try again. → P132

Service is not registered.

i-mode service is not available because you have not subscribed to i-mode. A separate subscription is required to use i-mode. If you subscribe to i-mode while using the FOMA handset, turn the power off then turn on.

Service Unavailable

Network services are not available due to an error. Try again.

Set member

ChatMail cannot be sent to a party not registered as a chat member. Register as a chat member. \rightarrow P204

Set template?

Message just entered will be lost.

Setup Dictionary Already set 5 files!

5 downloaded dictionaries have already been enabled. The selected downloaded dictionary cannot be enabled. Disable unnecessary downloaded dictionaries and try again. → P303

Setup Dictionary Destroyed Dictionary!

The downloaded dictionary has corrupt or invalid data and cannot be enabled. Delete the downloaded dictionary. \rightarrow P303

Software size (<X>K) exceeds available space.

Delete some applications?

Not enough free space. Delete some applications. Press . [Yes] to delete.

Software Update Failed

Failed to update the software. Or the battery level became low during the software update. Contact a service counter such as DoCoMo shop.

Software Updated

The target software cannot be run because it has not been updated.

Some editing operations are not available.

Because the file size is 60 x 60 or smaller, there are some items not available for editing.

SSL session cannot be established.

The connection cannot be established because a tempered SSL certificate was received or an SSL error occurred.

 Could not access to a web site or internet homepage supporting SSL communication. Try to connect again.

SSL session failed.

The connection cannot be established because of a server authentication error.

Stand-by error Clear from standby?

An error occurred on the i-appli stand-by screen. Press (h) [Yes] to cancel the Wallpaper screen, and (ie) [No] not to cancel.

Storage device no longer accessible.

If the screen of an application that accesses the microSD memory card is open when the FOMA USB Cable (optional) is connected, the microSD memory card cannot be accessed. The FOMA USB Cable (optional) must be connected before opening an application to access the microSD memory card

System Time Error This data cannot be replayed.

The copyright protected file with expiration date cannot be played because the network is not applicable to time or the time information cannot be enabled.

Text entry size exceeds limit. Delete message

No more characters can be entered into the message text because the maximum number of enterable characters exceeded.

The reminder must be set to a future date/time.

The setting of Reminders is invalid. Check the start date and time/due day of the schedule event or task.

The software will use saved data, terminal ID, and UIM ID. Download?

This message appears when the information provider needs to identify you with the "Serial Number of Mobile Phone/UIM". The "Serial Number of Mobile Phone/UIM" is sent via the Internet and it may be perceived by a third party. This operation does not send your mobile phone number, postal address, age, or sex to the information provider. Press (A) [Download] to connect.

The software will use saved data.

The downloaded application will use data saved in your handset (Contacts, Bookmarks, or Schedule events, etc.). Select (h) [Download] to download.

The software will use terminal and UIM ID. Download?

This message appears when the information provider needs to identify you with the "Serial Number of Mobile Phone/UIM". The "Serial Number of Mobile Phone/UIM" is sent via the Internet and it may be seen by a third party. This operation does not send your mobile phone number, postal address, age, or sex to the information provider. Press Im [Download] to connect.

This i-motion type is not supported

This i-motion movie is not supported by the FOMA handset and cannot be played. → P227

This site is not certified. Do you connect?

The SSL validity period has not yet started or has already expired. Press 🗼 [Yes] to perform the connection, or press 📭 [No] to cancel the connection.

Time is too close to another Auto-start

This Auto-start is too close to an already-set one. Confirm the Autostart of each i-appli, and set again not to make them too close.

Time out.

Connection could not be established within the time set in "Connection Timeout". Change the setting or try again. → P171

Too many SMS messages in UIM.

The maximum number of SMS has been saved on the UIM. Delete unnecessary SMS and move or copy. \rightarrow P198, P199, P200

Too much data was entered.

There are too many characters entered for a URL and it cannot be connected. Enter a URL within 256 half-pitch characters.

Total Play Cycles:XX

The downloaded i-motion movie has playback restrictions. You can play it the number of times appearing on the screen. (XX) shows the total number of times playback is allowed.

Transmission Failed.

The mail could not be sent because the mail box of the destination is full.

Transmission failed.

The mail was not sent properly.

Truncated or Invalid Field(s) One or more fields contain truncated or invalid information.

A part of information will be deleted because received data in the Phonebook or schedule event/ task contains invalid information, or the text information exceeds the limit for the maximum number of savable characters.

Turn Auto Update Off? Cannot complete action while Auto Update is Time & Time Zone.

*: When "Auto Update" in "Time and Date" is set to "ON(Time only)", "ON(Time only)" is displayed.

"Time", "Time Zone" and "Date" cannot be changed because "Auto Update" is set to "ON(Time and time zone)" or "ON(Time only)". Press () (Yes), set "Auto Update" to "Off" and try again. Turn Auto Update Off? Cannot change city name and time zone while Auto Update is Time & Time Zone*.

*: When "Auto Update" in "Time and Date" is set to "ON(Time only)", "ON(Time only)"is displayed.

The World Clock cities cannot be changed because "Auto Update" of "Date and Time" is set to "ON(Time and time zone)" or "ON(Time only)". Press 👍 [Yes], set "Auto Update" to "Off" and try again.

UIM Blocked Some actions may not be allowed until UIM card is unblocked.

 The PUK has been locked because an incorrect PUK was entered 10 times in a row while the UIM PIN2 was locked. Contact a DoCoMo shop. → See the back of the manual

UIM not inserted. Requested service not available.

The UIM has not been inserted. Insert the UIM and try again.

Unable to attach this file, it exceeds the allowed attachment size.

No more files can be attached because the number of attached files has been exceeded. \rightarrow P189

Unable to Charge

You attempted to charge without the battery pack. Install the battery and charge. → P41

Unable to Connect XXXXX*

*: A Bluetooth device name is displayed.

Unable to Display Version Infor

Pattern data version failed to be displayed. Try again.

Unable to download data due to play restriction data error

The data cannot be obtained because of invalid i-motion movie playback restriction data.

Unable to download Number of Dictionary is full. Delete some Dictionary.

The dictionary cannot be downloaded because 10 dictionaries have already been stored. Delete unnecessary data and try again. → P303

Unable to download Phone memory is full. Delete some files.

The downloaded dictionary cannot be saved because of insufficient memory space on the FOMA handset. Delete unnecessary data and try again. → P303

Unable to download Please set the clock to obtain data.

A file with an expiration date cannot be downloaded because Date and Time have not been set correctly. Set Date and Time, then download again. -> P48

Unable to download. Data exceeds maximum size. (452)

- Because the data exceeds the maximum size, it cannot be received.
- The dictionary cannot be downloaded because its size exceeds 20K bytes.

Unable to Open Card Error

The UIM card cannot be accessed, or an invalid UIM card is inserted. Insert the UIM card again, or insert the correct UIM card. \rightarrow P39

Unable to Open Please set the clock to replay data.

A copyright protected file with an expiration time cannot be played because the network time information is not accessible.

Unable to Open Replay period has expired. Delete?

The file cannot be displayed/ played because the playback period has expired. Press (h) [Yes] to delete the file.

Unable to Open

Replay period has not yet started.

You attempted to play a file before its playback start date. Play the file after the playback start date.

Unable to Open Requested file cannot be played.

The file cannot be played because the file expired, the available number of times for playback has been exhausted or playback error occurred.

Unable to Open This data can no longer be replayed. Delete?

Unable to protect any more messages.

No more items can be protected because the maximum number has already been protected. Unprotect some items and try again. — P166, P173, P198, P199, P200, P200

Unable to retrieve the requested URL. (504)

Connection cannot be established because the server does not respond. Try again.

Unable to save as template.

Cannot be saved as a template because the decoration has not been set.

Unable to save due to this data being incompletely downloaded

This i-motion data has not been completely obtained and cannot be saved.

Unable to Set Configuration

- · An error occurred while performing roaming guidance. and it was not activated. Try again.
- Could not enable because the Scanning Function cannot be set. Try again.

Unable to set this function.

Settings cannot be changed because communication is in progress. Try again after the communication is finished.

Unable to start. Software installed with different UIM.

The i-appli cannot start due to UIM Restrictions. Insert the original UIM and try again.

Unable to Update Pattern Definitions

The pattern definitions cannot be updated. Try again later.

Unable to view file. Access to URL is limited. (491)

Cannot display because the available number of access has been exceeded.

Unassigned Number Speed Dial X* Speed Dial number unassigned.

*: The entered number appears.

Speed Dial is not registered to the entered phone number. Register a Speed Dial. →P109

Unassigned Number Speed No. X* Invalid Speed No.

*: The entered number appears.

Entered Quick Access Number (P102) is invalid.

Unassigned Number Speed No. X* No number assigned.

*: The entered number appears.

No UIM Phonebook found that the entered Quick Access Number (P102) is set be used to dial.

Unavailable in roaming mode.

- The pattern data cannot be updated while roaming. Try to update within the FOMA network
- · The software cannot be updated while roaming. Try to update within the FOMA network.

Unlock Code Incorrect(4), Try Again

An incorrect Unlock Code has been entered. Enter the correct Unlock Code.

Update package is corrupt: Software Update Not Performed

The software update was terminated because the file is broken. Trv again later.

URL address changed. (301)

URL has been changed because the web site moved. If you have saved the URL in a Bookmark. save it again. → P164

URL address is not valid. (XXX)

The site cannot be displayed because the received data contains an error. 3-digit number is displayed in (XXX).

URL is too long to register.

The URL has too many characters to save as a bookmark or a screen memo. Up to 256 half-pitch characters can be registered as a URL.

URL was too long, so it could not be saved.

The URL has too many characters to save. Enter a URL within 256 half-pitch characters.

Use folder for this software?

The mail-link i-appli you are about to download is already saved in the Inbox. Press 📕 [Yes] to overwrite. Press [No] to delete the folder that contains the file and save it as a new file

Valid UIM Not Found Some actions may not be allowed without a valid UIM card

- The UIM is not inserted. Insert the UIM. \rightarrow P39
- Invalid UIM is inserted. Insert the valid UIM → P129
- A LIIM that the LIIM PIN is locked is inserted. Enter UIM PIN to unlock → P129
- If an incorrect PLIK code has been entered 10 times in a row while the UIM PIN is locked, the PLIK code will be locked Contact the service counter of a DoCoMo shop. → See the back of this manual
- The UIM is broken. Contact the "DoCoMo Information Center" listed up on the back of this manual

Valid UIM Not Found Some actions may not be allowed without a valid UIM card.

The handset is completely locked because an incorrect PUK code has been entered 10 times in a row. Contact a service counter such as DoCoMo shop.

Videophone Initiation Error

Video calls cannot be made because an error occurred. Try again.

Voicemail Already Active

You attempted to activate Voicemail when it was already activated

Voicemail Denied

- · You attempted to activate Voicemail without the subscription to the Voicemail service.
- · You attempted to activate Forwarding Party Busy Setting without the subscription to the Voicemail service.

Voicemail Inactive

You attempted to deactivate Voicemail/Call Forwarding service when it was already deactivated.

Error Messages

Appendix/Using External Devices/Troubleshooting

Voicemail or Call Forwarding Denied

You attempted to enable Set Arrival Act without the subscription to the Voicemail or Call Forwarding service.

Volume Label Invalid.

The name of "Storage Devices" cannot be changed because unavailable character was entered. Use alphabetic/numeric characters or symbols (/ \forall : < > : "?).

XXXXX*: Not Found

*: The number of the pressed Dial Keys is displayed.

A network is not registered to the number that corresponds to the entered number, or an entry to Dialed/Received Calls has not been recorded.

You have no certificate Do you connect?

The user certification has not been downloaded. Press (A) [Yes] to connect and (A) [No] not to connect. However, even if (A) [Yes] is pressed, a connection may not be established depending on the web site.

Your certificate has expired. Do you want to connect?

Your user certificate has expired. Press . [Yes] to connect, and . [No] no to connect.

Your terminal ID and FOMA card ID are requested. Send?

This message appears when the information provider needs to identify you with the "Serial Number of Mobile Phone/UIM". The "Serial Number of Mobile Phone/UIM" is sent via the Internet and it may be perceived by a third party. This operation does not send your mobile phone number, postal address, age, or sex to the information provider. Press (a) [Yes] to establish a connection.

Recording a new track will erase existing audio in this movie. Record new track?

Performing "Record New Track" deletes the existing audio of the i-motion movie being edited. Press (h) [Yes] to perform "Record New Track".

<filename> Already Exists. Overwrite?

You are attempting to save a file with an existing file name. Select <u>h</u> [Yes] to overwrite, and <u>i</u>. [No] to save as a different file name.

200 bookmarks already registered. Overwrite?

30 screen memos already saved. Overwrite?

付加番号* Denied

*: The number of the operated additional number (1 or 2) is displayed.

You attempted to register an Additional Number 1 or 2 without the subscription to an Additional Number 1 or 2.

Warranty and After-sales Service

Warranty

- Be sure to receive a warranty attached to FOMA handset you purchase. Read contents of the warranty and confirm items such as the shop name and the date of purchase and keep it in a safe place. If necessary items are not described, immediately contact the shop you purchased. The warranty for free repair is valid for 1 year from the date of purchase.
- This product and its accessories are subject to change, in part or whole, for improvement without prior notice.
- Saved contents of phonebook and other functions may be altered or lost by failure, repair or other handling
 of FOMA handset. You are recommended to note down the contents of phonebook and other functions as a
 precaution. In repair, etc. of FOMA handset, information downloaded with i-mode or i-appli is not transferred
 to FOMA handset in repair, with some exceptions, because of the Copyright Law.
 - *: This FOMA handset allows you to save files, such as still images stored in the Databox onto the microSD memory card.
 - *: If you have a PC (Windows 2000 or Windows XP), use proprietary Data Link Software and the FOMA USB cable (optional) to transfer/save data stored in the Phonebook to the PC.

After-sales Service

Malfunctioning

Before requesting for repair, check by yourself referring to "Troubleshooting" in this manual. If the problem still persists, contact \cdot Repairs on the back of this manual.

When Repair is Assumed Necessary by Contacting

Take your FOMA handset to a service center designated by DoCoMo. Be sure to check the opening hours of the service center. Note that you must bring the warranty.

In Warranty period

- The FOMA handset will be repaired at no charge subject to the conditions of the warranty.
- The warranty must be presented when requesting for repair. Even in the warranty period, you will be charged for repair if the warranty is not presented or the trouble or damage is caused by your inappropriate handling.
- The subscriber is charged even during the warranty period for repair of failures caused by the use of devices or consumable items that are not DoCoMo-specified.

Repair may not be possible in the following cases:

Repair may not be possible when perspiration is detected by the moisture detection seal; when corrosion
due exposure to moisture, condensation or sweat is found in a test result; or if any of the internal boards
are damaged or deformed. Since these conditions are outside the scope of the warranty, any repairs, if at
all possible, will be charged.

After expiration of the warranty

• All repairs that are requested are charged.

Replacement parts

 Replacement parts (parts required to maintain production function) will be kept in stock for at least 6 years in principle after termination of production. However, repair may still not be possible due to a lack of replacement parts depending on the failure. Even after the parts holding period, some failures may be repairable. Contact · Repairs on the back of this manual.

Notes

- Do not modify FOMA handset or its accessories.
 - Fire, injury or damage may result.
 - In order to prevent interference of radio waves or network troubles, technical standards are defined for FOMA handset and UIM by law. FOMA handset or UIM that do not meet these technical standards may not be used.
 - If the FOMA handset modified (in a way such as parts replacement, remodeling or painting) will be repaired only after the handset has been restored to the original conditions (containing DoCoMo genuine parts only). Note that, depending on the details of modification, repair may be refused.
 - Repair of failure or damage caused by modification is charged even in the warranty period.
- Do not remove rating stickers put on FOMA handset. Rating stickers function to certify that the FOMA handset
 meets the technical standards. If the stickers are removed intentionally or replaced disabling to confirm their
 contents, repair may be refused because compliance to the technical standards cannot be confirmed.
- Various function settings and information including total call time may be cleared (reset) by failure, repair or other handling of FOMA handset. In such a case, you have to make function settings again.
- FOMA handset contains magnetic components given below. Keep cash cards and other objects vulnerable to magnetism off such components or they may become unusable.

Magnetic components: Speaker and Earpiece

 When FOMA handset has got wet or moistened, immediately turn the power OFF, remove the battery pack and bring FOMA handset to repair shop. Note that, depending on the conditions of FOMA handset, it may not be reparable.

Phonebook and Downloaded Data

- Note down and keep separately the data you registered in your FOMA handset. DoCoMo will not accept any liability whatsoever for changes of information or loss of information.
- The Data you created or imported or downloaded from external sources may be altered or lost as a result of
 changing the FOMA handset model or repairing the FOMA handset. DoCoMo is not responsible for data
 alteration or loss under these circumstances. Also, at DoCoMo's convenience, your FOMA handset may be
 replaced with a substitute product instead of repaired. In this case, only a part of the data on the product can
 be transferred to the substitute. For this FOMA handset, images and melody downloaded from i-mode official
 site are transferred at repair. (Some contents may not be transferable. Moreover, depending on severity of
 the failure, transfer of contents may be disabled.)

Software Update

Updating Software

This function checks whether FOMA handset software requires update and, if required, updates the software by downloading a part of it using packet communication.

* Communication charges do not apply for packet communication for software update.

When software update is necessary, you will be informed of it with DoCoMo's web site and "お知らせ (News)" of iMenu.

There are 2 ways available for software update:

 Update Now
 : You update immediately when you want.

 Scheduled Update
 : When you set a schedule to update, software is automatically updated on the scheduled day.

Software update is available even if you have set connection destination from i-mode destination.

- Out of the service area

Other functions are active

- During International Roaming

- Fully charge the battery pack before updating software.
- Software update is disabled in the following cases:
 - Power is OFF - UIM not inserted
- Low battery level
- Clock not set
- During a call
- Phone Lock
 - Lock Application - UIM PIN being entered
- Connected to external device such as PC
- **UIM PIN Locked**
- Software update (downloading and rewriting) may take a while.
- During software update, making calls, receiving calls, various communication and other functions are disabled. However, you can receive voice calls during downloading.

- Self Mode

- During software update, FOMA handset makes SSL communications with the server(software update server managed by DoCoMo).
- Validate the SSL certificate (Default:Validate All, Setting Options →P174).
- You are recommended to perform software update without moving under conditions with strong radio wave reception level and 5 antenna icons displayed.
- * If the radio wave reception level go worse during software download or download is suspended, retry software update under good radio wave reception level.
- If you check software update after software update, message "No Update Required: You may continue using your current version." appears.
- After software update, an icon indicating the i-mode Center storage status disappears. When mail is delivered during software update with "Receive Option" set to "ON", screen indicating that there is mail may not appear after software update. →P191
- During software update, information (handset model, serial No., etc.) specific to your mobile phone is automatically sent to the server (software update server managed by DoCoMo). DoCoMo does not use the sent information for other purposes than software update.

Note

- Never remove the battery pack during software update. Doing so may cause update to fail.
- Software update can be carried out with data such as phonebook, camera images, downloaded data maintained. Note that, however, such data may not be protected depending on the conditions of FOMA handset (failure, damage, wetting, etc.). You are recommended to back up important data (some data including downloaded data cannot be backed up).
- When software update has failed, "Rewriting Failed" appears, disabling any kind of operations. In that case, you have to bring FOMA handset to repair center specified by DoCoMo.

Starting Software Update




Software Update

Image: Settings Image: Software Update Image: Setting Setting Setting Setting Seturity Code

Check the notes \blacktriangleright [-+]/[OK]



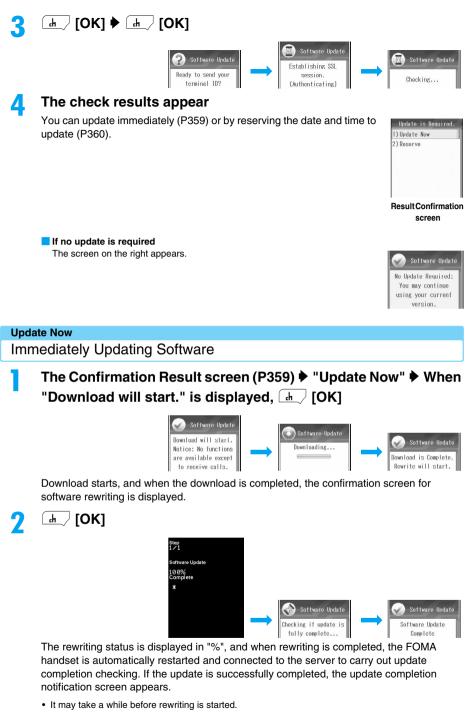

• All the operations will be disabled during rewriting.



Updating Software on Scheduled Date

If it takes time to download or the server is congested, you can set to automatically update the software by reserving the date and time to update the software.



Confirmation Result screen (P359) ▶ "Reserve"


Communicated with the server, and available dates and times for reservation will be displayed.

If the desired date and time are not displayed

You can specify a desired date, etc. to redisplay available dates and times for reservation on the server. ${\rightarrow}\mathsf{P360}$

	_	
Select D	ay and	Time
- NOV - 06	13:12	
- NOV - 06	16:42	
- NOV - 06	17:31	
- NOV - 06	18:22	1
- NOV - 06	19:00	.
- NOV - 06	20:57	
- NOV - 06	21:22	
	- NOV - 06 - NOV - 06	Select Day and - NOV - 06 13:12 - NOV - 06 16:42 - NOV - 06 17:31 - NOV - 06 18:22 - NOV - 06 19:00 - NOV - 06 20:57 - NOV - 06 21:22

Date and Time Selection screen



Note

- If the reserved date/time for software update comes while starting a schedule alarm, while receiving mail and a message, software update may not start.
- If "Master Clear" is complete, the reserved date/time is canceled. Reserve the software update again.
- The server time is displayed on the desired date and time selection screen.

Checking If a Reservation Can be Made by Specifying the Date and Time

You can redisplay the available dates and times on the server by specifying a date and a period of time you want to reserve.

Desired date and time selection screen (P360) 🕨 🖅 [Others]

The desired date screen appears.

Use 🛟 to select a date 🕨 🖅 [Select]


The time zone screen appears.

- (\underline{H}) [Details]: You can check the meanings of the symbols. The symbols denote as follows; \bigcirc : Available
 - \bigtriangleup : Limited periods of time available
 - \times : Not available

<u> 3</u> Select a time slot 🕨 🖲

Returns to the desired date and time selection screen.

• Go to Step 2 in "Updating Software on a Scheduled Date" (P360) for further steps.

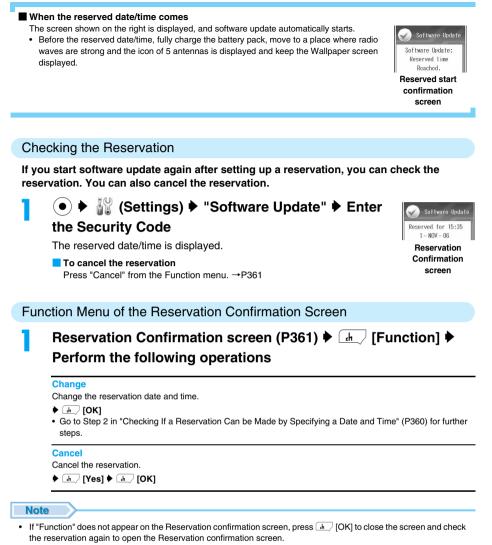

Scanning Function


Protecting Mobile Phone from Dangerous Data

First, update the pattern data to the latest one.

As for data and programs downloaded to FOMA handset from site or via i-mode mail, etc., you can detect and delete data or disable applications that may cause troubles.

 Pattern data is used for checking. Update pattern data, which is upgraded as needed when new problems are detected. →P362

- Scanning Function provides a means to protect FOMA handset from data that may invade when viewing web site or receiving mail, etc., causing troubles of FOMA handset. Note that this function cannot avoid occurrence of troubles unless pattern data specific to individual troubles has not been downloaded to FOMA handset or such pattern data does not exist.
- Pattern data has different contents depending on mobile phone models. Note that, therefore, DoCoMo may stop distributing pattern data for models that have been on the marker for 3 years or more.

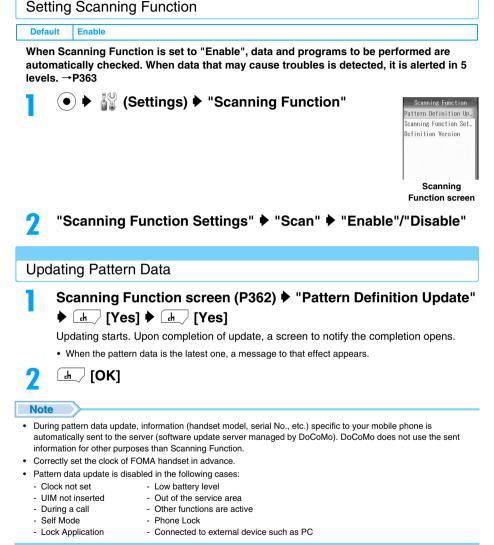

Scan Result Display

Display of problem elements scanned

When problem elements are detected, up to 5 problem elements lists on a screen. When 6 or more problem elements have been detected, the sixth and subsequent elements are not displayed.

 When information does not fit on a screen, "Next page" is displayed on the Left Soft Key. Press <u>I</u> [Next page] to switch the screen, and "OK" or "Yes" appears on the Left Soft Key.

Scanning Function
Operation may not run
properly.
Problem Elements
Detected: 6 total
(displaying 1-5)
1. PadJava006.J - 0
2. PadJava005.J - 0
lore

Scan result display

Alert level 0	Alert level 1	Alert level 2	Alert level 3						
Alert level 0 Scanning Function (Deration may not run properly, Problem Elements Detected: 1 Total (displaying 1-1) 1.BehaviorLv0.U K	Alert level 1 Scanning Function Operation may not run properly. Cancel operation? Problem Elements Detected: 2 Total (displaying 1-2) 1.MaliHtml12.H 2.BehaviorLv1.H Yes No Mage N	Alert level 2 Scanning Function Repartion may not run properly. Canceling operation. Problem Elements Detected: 2 Total (displaying 1-2) 1.BehaviorLv2.H 2.BehaviorLv1.H K (K (K) (K	Alert I When you detect an undeletable data Scanning Function Operation may not run properly. Delete data? Problem Elements Detected: 3 Total (displaying 1-3) 1. Behaviort.v2.H 3. Behaviort.v2.H 4. Behaviort.v2	evel 3 When you detect an undeletable data Scanning Function Operation may not run property. Canceling operation. Problem Elements Detected: 1 Total (displaying 1-1) 1.BehaviorLv3.H UK					
operation.	Lat [Yes]: Stop operation and return to the Wallpaper screen/the previous screen. ▲ [No]: Continue operation.	operation and return to the Wallpaper screen.	Image: Test in the second s	Terminate the operation. Pressing (b) [OK] on the message returns to the Wallpaper screen or the previous screen.					

Alert I	evel 4
When you detect an undeletable data	When you detect an undeletable data
Scanning Function Deleting data. Problem Elements Detected: 3 lotal (displaying 1-3) 1.BehaviorLv3.H 3.BehaviorLv3.H 3.BehaviorLv2.H	Seeming Function Departion may not run property. Cancel ing operation. Problem Elements Detected: 1 Total (displaying 1-1) 1.Behaviort.v4.H
(DK): Delete data and return to the Wallpaper screen/the previous screen.	 [OK]: Terminate the operation. Pressing [OK] again screen returns to the Wallpaper screen or the previous screen.

Scanning Function screen (P362) "Definition Version"



Major Specifications

Model name		FOMA M702iG						
Dimensions (H×W×D)		101×53×19.8 millimeters						
Weight		Approximately 128 g (with battery pack installed)						
Memory		ROM 64MB (NAND Flash Memory)+ ROM 64MB (NOR Flash Memory) RAM 32MB (SDRAM)						
Continuous standby time	FOMA/3G	Stationary: Approximately 340 hours Moving: Approximately 170 hours						
	GSM	Approximately 270 hours						
Continuous call time	FOMA/3G	Voice Call: Approximately 120 minutes Video Call: Approximately 90 minutes						
	GSM	900MHz: Approximately 200 minutes 1800/1900MHz: Approximately 200 minutes						
Battery pack type		Lithium-ion battery						
Battery capacity		900 mAh						
Charging time with FOMA	AC Adapter 01 (optional)	Approximately 140 minutes						
Charging time with FOMA Adapter 01 (optional)	Overseas/Domestic AC	Approximately 140 minutes						
Charging time with FOMA	DC Adapter 01 (optional)	Approximately 140 minutes						
Number of camera pixels		In Camera: Approximately 100,000 effective pixels (100,000 pixels) Out Camera: Approximately 2,000,000 effective pixels (1,900,000 pixels)						
Digital zooming		In Camera: Up to 2 times Out Camera: Maximum of 8 times*1						
Bluetooth	Applicable Bluetooth version	Compliance with Bluetooth standard Ver.1.2*2						
	Output	Bluetooth standard Power Class2						
	Line-of-sight distance*3	Approximately 10 meters or less						
	Applicable Bluetooth Profiles*4	Object Push Profile Dial-Up Networking Profile Headset Profile Hands-free Profile Basic Printing Profile Basic Imaging Profile File Transfer Profile Advanced Audio Distribution Profile Audio/Video Remote Control Profile						
Bluetooth	Frequency Band to use	2400MHz frequency band used (2400MHz to 2483.5MHz)						

- *1: The maximum zoom ratio for capturing a still image is 4 times retaining the same resolution. The maximum zoom ratio for capturing a video is 2 times.
- *2: All devices equipped with Bluetooth function including FOMA handset have been confirmed to comply with Bluetooth standard defined by Bluetooth SIG and thereby certified. Note that, depending on the characteristics and/or specifications of devices connected, operations may be different or data may not be exchanged even after connection has been established.
- *3: This varies depending on obstacles, if any, between communicating devices and/or radio wave reception level.
- *4: Specification conforming to usage of Bluetooth compatible devices and is a part of Bluetooth standard.
- The continuous call time is an estimate of time available for calls under conditions allowing normal radio wave transmission and reception.
- The continuous standby time is an estimate of time available for moving under conditions allowing normal
 radio wave reception. The continuous standby time may be reduced by half depending on the battery level,
 function settings, operating conditions such as temperature and radio wave reception level (Poor or weak
 radio wave) in the place of use. Performing i-mode communication will reduce the call (communication) and
 standby times. Even when you do not make calls or i-mode communication, creating i-mode mail, activating
 downloaded i-appli or i-appli stand-by screen, performing data communication or multiaccess function, using
 camera or playing video and/or melody may shorten the call (communication) and standby times.
- The continuous standby time in stationary state is a mean time available to normally receive radio waves with FOMA handset closed in stationary state.
- The continuous standby time in moving state is a mean time available to normally receive radio waves with FOMA handset closed in combination of stationary, moving and out-of-the-service-area states.
- The charging time an estimate for charging an empty battery pack with FOMA handset turned OFF. Charging with FOMA handset turned ON will require longer time.

Maximum Number of Savable/Protectable in the FOMA Handset

The maximum number of each type of data that can be saved/protected varies depending on the data saved on the FOMA handset or memory usage.

	Туре	Maximum Number of Saved Messages	Maximum Number of Protected Messages
Mail	Inbox	500	250
	Outbox	300	150
	Unsentbox	-	_
SMS on th	ne UIM	20*1	_
Message	MessageR	20	20
	MessageF	15	15
Bookmark		200	_
Screen Me	emo	30	15
i-appli	Downloaded i-appli*2	500*4	_
	Mail-linked i-appli*3	-	
Databox	Image	-	_
	Video/i-motion		
	Melody		
	Chara-den	-	_
	Animation		_
	Voice Note	7	_

365

- *1: Only SMS in the Inbox can be saved.
- *2: Up to 60 i-applis can be saved (including pre-installed i-appli).
- *3: Up to 23 i-applis can be saved (this is included in the above 60 i-applis).
- *4: This is an approximate number when 100K byte-files are saved.

Authentication

Specific Absorption Rate (SAR) of Mobile Phone

Mobile phone FOMA M702iG meets the technical regulation defined by the government for absorption of radio waved to human body. This technical regulation has been established based on scientific studies so that radio waves emitted from radio devices such as mobile phones used near a human head give no bad influence to the human health. It defines that Specific Absorption Rate (SAR), representing the average amount of energy of radio waves absorbed to a temporal part of human body, should not exceed a permissible value of 2W/kg*. This permissible value includes a substantial safety margin designed to assure the safety of users, regardless of the age, body size and other conditions of individuals and is equal to the international guideline recommended by International Commission of Non-Ionizing Radiation Protection (ICNIRP) which has cooperative relationships with World Health Organization (WHO).

All mobile phones should be confirmed to comply with the governmental regulation according to Radio Law before they are released. The SAR value of FOMA M702iG is 0.215 W/kg. This value has been acquired by Telecom Engineering Center (TELEC) and is the maximum value of those measured under the maximum transmission power of the mobile phone in the procedure defined by the government. Though there may be some differences in SAR value among individual products, they all meet the technical regulation. In addition, mobile phones are designed to have the lowest transmission power required for communication with base stations; therefore, the SAR value during actual phone operation becomes smaller. SAR value of this mobile phone meets the regulations of individual countries it is available.

For further information about SAR, visit the following web sites:

Ministry of Internal Affairs and Communications:	http://www.tele.soumu.go.jp/e/ele/body/index.htm
Association of Radio Industries Businesses:	http://www.arib-emf.org/index.html
DoCoMo:	http://www.nttdocomo.co.jp/english/product/
Motorola, Inc.:	http://www.motorola.com/rfhealth

*: The technical regulation is defined in Article 1-2 of the Ministry Ordinance Regulating Radio Equipment.

Radio Frequency (RF) Signals

THIS MODEL PHONE MEETS THE U.S. GOVERNMENT'S REQUIREMENTS FOR EXPOSURE TO RADIO WAVES. Your wireless phone contains a radio transmitter and receiver. Your phone is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies.

The exposure standard for wireless mobile phones employs a unit of measurement known as the Specific Absorption Rate (SAR). The SAR limit set by the FCC is 1.6W/kg.* Tests for SAR are conducted using standard operating positions accepted by the FCC with the phone transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the phone while operating can be well below the maximum value. This is because the phone is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the output.

Before a phone model is available for sale to the public, it must be tested and certified to the FCC that it does not

exceed the limit established by the U.S. government-adopted requirement for safe exposure. The tests are performed on position and locations (for example, at the ear and worn on the body) as required by FCC for each model. The highest SAR value for this model phone as reported to the FCC when tested for use at the ear is 0.30W/kg, and when worn on the body, is 0.37W/kg. (Body-worn measurements differ among phone models, depending upon available accessories and FCC requirements). While there may be differences between the SAR levels of various phones and at various positions, they all meet the U.S. government requirement.

The FCC has granted an Equipment Authorization for this model phone with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this model phone is on file with the FCC and can be found under the Display Grant section at http://www.fcc.gov/oet/fccid after search on FCC ID IHDT6FM1.

For body worn operation, this phone has been tested and meets the FCC RF exposure guidelines when used with an accessory designated for this product or when used with an accessory that contains no metal and that positions the handset a minimum of 2.5 cm from the body.

In the United States, the SAR limit for wireless mobile phones used by the public is 1.6 watts/kg (W/kg) averaged over one gram of tissue. SAR values may vary depending upon national reporting requirements and the network band.

Specific Absorption Rate Data

This model meets international guidelines for exposure to radio waves.

Your mobile device is a radio transmitter and receiver. It is designed not to exceed the limits for exposure to radio waves recommended by international guidelines. These guidelines were developed by the independent scientific organization ICNIRP and include safety margins designed to assure the protection of all persons, regardless of age and health.

The guidelines use a unit of measurement known as the Specific Absorption Rate, or SAR. The ICNIRP SAR limit for mobiles devices used by the general public is 2 W/kg and the highest SAR value for this device when tested at the ear was 0.65W/kg.1 As mobile devices offer a range of functions, they can be used in other positions, such as on the body as described in this user guide.² In this case, the highest tested SAR value is 0.77W/kg.¹

As SAR is measured utilizing the device's highest transmitting power, the actual SAR of this device while operating is typically below that indicated above. This is due to automatic changes to the power level of the device to ensure it only uses the minimum level required to reach the network.

While there may be differences between the SAR levels of various phones and at various positions, they all meet the governmental requirements for safe exposure. Please note that improvements to this product model could cause differences in the SAR value for later products; in all cases, products are designed to be within the guidelines.

The World Health Organization has stated that present scientific information does not indicate the need for any special precautions for the use of mobile devices. They note that if you want to reduce your exposure then you can do so by limiting the length of calls or using a "hands-free" device to keep the mobile phone away from the head and body. Additional Information can be found on the websites of the World Health Organization

(http://www.who.int/emf) or Motorola, Inc.

(http://www.motorola.com/rfhealth).

- The tests are carried out in accordance with international guidelines for testing. The limit incorporates a substantial
 margin for safety to give additional protection for the public and to account for any variations in measurements.
 Additional related information includes the Motorola testing protocol, assessment procedure, and measurement
 uncertainty range for this product.
- 2. Please see the Safety and General Information section about body worn operation.

European Union Directives Conformance Statement

Hereby, Motorola declares that this product is in compliance with:

- · The essential requirements and other relevant provisions of Directive 1999/5/EC
- · All other relevant EU Directives



The above gives an example of a typical Product Approval Number.

You can view your product's Declaration of Conformity (DoC) to Directive 1999/5/EC (to R&TTE Directive) at www.motorola.com/rtte. To find your DoC, enter the product Approval Number from your product's label in the "Search" bar on the web site.

Important Safety Information

AIRCRAFT

Switch off your wireless device when boarding an aircraft or whenever you are instructed to do so by airline staff. If your device offers a 'flight mode' or similar feature consult airline staff as to whether it can be used on board.

DRIVING

Full attention should be given to driving at all times and local laws and regulations restricting the use of wireless devices while driving must be observed.

HOSPITALS

Mobile phones should be switched off wherever you are requested to do so in hospitals, clinics or health care facilities. These requests are designed to prevent possible interference with sensitive medical equipment.

PETROL STATIONS

Obey all posted signs with respect to the use of wireless devices or other radio equipment in locations with flammable material and chemicals. Switch off your wireless device whenever you are instructed to do so by authorized staff.

INTERFERENCE

Care must be taken when using the phone in close proximity to personal medical devices, such as pacemakers and hearing aids.

Pacemakers

Pacemaker manufacturers recommend that a minimum separation of 22cm be maintained between a mobile phone and a pacemaker to avoid potential interference with the pacemaker. To achieve this use the phone on the opposite ear to your pacemaker and do not carry it in a breast pocket.

Hearing Aids

Some digital wireless phones may interfere with some hearing aids. In the event of such interference, you may want to consult your hearing aid manufacturer to discuss alternatives.

For other Medical Devices:

Please consult your physician and the device manufacturer to determine if operation of your phone may interfere with the operation of your medical device.

Export Administration of This Product and Its Accessories

This product and its accessories are under coverage of the export administration regulations of Japan ("Foreign Exchange and Foreign Trade Control Laws" and the related laws and regulations) and the U.S.A. (Export Administration Regulations). When exporting or reexporting this product and its accessories, take necessary procedures on your responsibility and expense. For details, contact Ministry of Economy, Trade and Industry or U.S. Department of Commerce.





Index/Quick Manual

Index	372
How to Use the Quick Manual	378
Quick ManualEnd of the Ma	anual

Index

184/186									56

A

Accessing Sites 160
Accessories
Additional Services
Adding Service
Executing Added Service
After-sales Service 356
Alarm
Delete
Album (Picture/i-motion) 237
Create 237
Most Viewed 237
Alternative Image 90
Auto Answer
Available Networks 315

В

Backlight 125
Barcode Reader
Battery Meter
Battery Pack 41
Bluetooth Link
Audio Devices
Functions available 272
Printing
Registered device list 275
Registering and Connecting a
Bluetooth Device 273
Search standby setting 274
Sending 272
Settings 273
Bookmark
Access
Compose message 165
Delete
Edit title
List
Save in Phonebook 165
Saving 164
Send (via Infrared
communication) 165
Send all entries (Bluetooth)
Send all entries (Infrared)
Send data (Bluetooth) 165
Brightness

С

Call Barring - Roaming	315
Call Cost	267
Call Forwarding	282
Enable/Disable Forwarding	
Guidance	283
Call Forwarding (Overseas)	
,	316
Call Rejection	137
Call Times	266
Call Waiting Service	281
Answering a Call.	282
Making a Call	282
Call/Charging/Illumination	LOL
Indicator	. 30
Caller ID Notification 49	. 00
186/184	
Caller ID Request	
Calls	. 62
Handsfree	
Hold	. 54
International Calls	. 58
Making	. 52
Mute	. 54
Placing a Call on Hold	
Receiving	. 63
Camera	
Capturing Still Images	145
Camera Settings	
Auto Timer	150
Brightness	149
Light On/Light Off	146
Lighting Conditions	149
Mirror	150
Quality	150
Resolution	150
Saving Destination	151
Shutter Tone	151
Switch	146
Switching In/Out Camera	
· · · · · · · · · · · · · · · · · · ·	149
Zoom	148
Capturing	110
Still Images.	145
Videos	147
Change i-mode Password	164
Changing the Ring Volume	104
	113
	113
Changing the Ringer ID	295
Character Entry	295 301
Cursor Timeout	300
Cutting	301
Default	300
English Settings	300
Entering a Symbol	299
Entering Characters	297

Entering Common Phrase	
	298
Entering Emoticon	299
Entering Pictograph (E-Moji	
	, 299
Entry Setup	299
Japanese Prediction	299
Kuten Code	302
Modifying	298
Pasting	302
Setting full-pitch/half-pitch	
	300
Switch Entry Mode	296
Switching full-pitch/half-pitch	۱
	296
Switching upper/lower case	
	296
Chara-den	239
Change Size	240
Controlling	239
	239
Detail Info	
Displaying	239
Enter V-Phone No	240
	3, 44
Charging time	44
Charging Lights	126
Chat Mail.	204
Change font size	206
Check recent rcver	206
Quit chatmail	206
Renewal.	206
Send	205
Set Member	204
Check new message	172
Check New SMS	207
Common Phrases	207
Enter	298
List	333
Copy File	
Melody File	242
Still Image File	228
Video/i-motion File	234
Voice Note	247
Country Code	
Country Code List.	311
Setting Auto Assist	311
Create Folder	
Bookmark	165
Mail	197
Screen Memo.	166
	100
Creating Mail	100
Attaching a File	189
Change the receiver	185
Creating Deco-mail	186
Preview	186
Quote phonebook	185
Save	185

Index/Quick Manual Index

Selecting Template	188
Sending	185
Credit Limit	267

D

Data Communication	289
AT Command	293
Available Communications	
	290
Connecting	290
Operating Environment	291
	292
Data Link Software	340
Databox	226
Datebook	261
Checking Schedule/Task	
	263
Create New Event	261
Delete	264
Setting Details	265
Deco-mail	186
Create	186
Display palette	186
Palette Operation	187
Default Settings	325
Delete File	
Flash	232
Melody File	242
Still Image File	228
Video/i-motoin File	234
Voice Note	247
Delete Folder	
Bookmark	165
Mail	165 197
Mail	
Mail	197 166
Mail	197 166
Mail Screen Memo Dialed Calls Saving Contacts to the	197 166 54
Mail Screen Memo Dialed Calls Saving Contacts to the Phonebook	197 166 54 97
Mail Screen Memo Dialed Calls Saving Contacts to the Phonebook Dialing Restriction	197 166 54 97 135
Mail Screen Memo Dialed Calls Saving Contacts to the Phonebook Dialing Restriction Dialing Restriction 30	197 166 54 97 135), 32
Mail Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Dialing Restriction 30 Display 30	197 166 54 97 135), 32 125
Mail Screen Memo Dialed Calls. Saving Contacts to the Phonebook Dialing Restriction Dialing Restriction 30 Display 30 Display Timeout Displaying Images	197 166 54 97 135), 32 125 227
Mail Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Dialing Restriction 30 Display 30	197 166 54 97 135), 32 125
Mail Screen Memo Dialed Calls. Saving Contacts to the Phonebook Dialing Restriction Dialing Restriction 30 Display 30 Display Timeout Displaying Images	197 166 54 97 135), 32 125 227
Mail Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Dialing Restriction 30 Display Timeout Displaying Images Auto Repeat Full Screen	197 166 54 97 135 0, 32 125 227 229
Mail Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Dialing Restriction 30 Display Timeout Displaying Images Auto Repeat Full Screen Operations. Operations.	197 166 54 97 135 0, 32 125 227 229 230 227
Mail Screen Memo Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Display Display 30 Display Timeout Displaying Images Auto Repeat Full Screen Operations Slide Interval	197 166 54 97 135 0, 32 125 227 229 230 227 230
Mail Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Display Display Display Timeout Displaying Images Auto Repeat Full Screen Operations Slide Interval Slide Show	197 166 54 97 135 0, 32 125 227 229 230 227 230 229
Mail Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Display Oisplay Timeout Displaying Images Auto Repeat Full Screen Operations Slide Interval Slide Show Zoom	197 166 54 97 135 0, 32 125 227 229 230 227 230
Mail Screen Memo Screen Memo Screen Memo Dialed Calls Saving Contacts to the Phonebook Screen Display Screen Displaying Images Auto Repeat Full Screen Slide Interval Slide Show Zoom Download Screen	197 166 54 97 135 227 229 230 227 230 229 229 229 229
Mail. Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Display Contacts to the Display Restriction Display Timeout Display Timeout Displaying Images Auto Repeat Full Screen Operations Slide Interval Slide Show Zoom Download Chara-den	197 166 54 97 135 227 229 230 227 230 229 229 229
Mail. Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Display Oisplay Timeout Display Timeout Auto Repeat Full Screen Operations. Slide Interval Slide Show Zoom. Download Chara-den Dictionaries	197 166 54 97 135 227 229 230 227 230 229 229 229 169 169
Mail Screen Memo Screen Memo Screen Memo Dialed Calls. Saving Contacts to the Phonebook Screen Memo Dialing Restriction Screen Memo Display Screen Memo Display Timeout Screen Memo Display Timeout Screen Memo Auto Repeat Full Screen Operations. Slide Interval Slide Show Zoom Download Chara-den Dictionaries Image	197 166 54 97 135 227 229 230 227 230 229 230 229 169 169
Mail. Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Display Oisplay Timeout Display Timeout Auto Repeat Full Screen Operations. Slide Interval Slide Show Zoom. Download Chara-den Dictionaries	197 166 54 97 135 227 229 230 227 230 229 229 229 169 169
Mail. Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Display Display Timeout Display Timeout Display Images. Auto Repeat Full Screen Operations. Slide Interval Slide Show Zoom. Download Chara-den Dictionaries Image iMelody Templates	197 166 54 97 135 227 229 230 227 230 229 230 229 169 169
Mail. Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Display Display Timeout Display Timeout Display Images. Auto Repeat Full Screen Operations. Slide Interval Slide Show Zoom. Download Chara-den Dictionaries Image iMelody Templates	197 166 54 97 135 227 229 230 227 230 229 229 169 169 168 168
Mail. Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Display Images Josplay Timeout Display Images Auto Repeat Full Screen Operations Slide Interval Slide Show Zoom Distionaries Image iMelody Templates Download Dictionary	197 166 54 97 135 227 229 230 227 230 229 229 169 169 168 168
Mail. Screen Memo Dialed Calls. Saving Contacts to the Phonebook. Dialing Restriction Display Display Timeout Display Timeout Display Images. Auto Repeat Full Screen Operations. Slide Interval Slide Show Zoom. Download Chara-den Dictionaries Image iMelody Templates	197 166 54 97 135 227 229 230 227 230 229 229 230 229 229 169 169 168 168 168 303

Е

Earpiece Volume	67
Edit Categories	98

Edit Common Phrase 3	
Modify	
Register	01
Edit Folder Name	
Bookmark 1	65
Mail1	97
Screen Memo 1	66
Editing Still Images	
Blur/Sharpen	30
Borders 2	30
Contrast	30
Image Style	30
Mirror	30
Rotation2	30
Editing Video/i-motion 2	36
Compress	37
Deleting Track	37
Extracting Still	
Recording Audio	
Electronic Dictionary 2	
Recent Entries	
Emoticon	
Enter	99
List	32
English Announcement Service	
	84
Error Messages	
Event Lights	
Export Administration 3	
External Connector Terminal	

F

FirstPass 174
Flash 159, 162
Operations 232
Play 232
Screen Saver
Video Quality 233
Font size
i-mode 170
Mail
Free Space
Camera146
Video camera 148
Function Menu 37

G

Н

Deleting .

Handsfree Talking	83
Home Screen	124
How to Use the Quick Manual	
	378

I							
i-appli							209
Activating							212

. . . 218

Setting the i-appli stand-by	
Screen	217
Software Info	213
Sort by	
Upgrade	213
i-appli setting	210
Abnormal exit history	010
Abrioritiai exit history	218
Auto-Start	216
Change ring/image	216
Lights	218
Network Access	216
Phbook/Dials acc	216
Security error history	218
Stand-by net	216
Start failure history	218
Trace output	218
Vibrate	218
	169
i-appli To Function	
i-appliDX	210
i-Channel	
Channel list	223
Telop	223
i-Channel Setting	
Telop display	223
Telop setting	
Telop speed	
	220
Image	
Setting as the alternate image	•
iMenu 156,	160
i-mode	155
i-mode	155 160
Accessing Sites	
Accessing Sites	160 164
Accessing Sites	160 164 161
Accessing Sites Bookmarks Compose message Compose SMS	160 164 161 161
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code	160 164 161 161 161
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display	160 164 161 161 161 161
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display Internet	160 164 161 161 161 161
Accessing Sites Bookmarks Compose message Convert char. code Image display Internet Last URL	160 164 161 161 161 163 163
Accessing Sites Bookmarks Compose message Convert char. code Image display Internet . Last URL My Menu	160 164 161 161 161 161
Accessing Sites Bookmarks Compose message Convert char. code Image display Internet Last URL Navigating and Performing	160 164 161 161 161 163 163
Accessing Sites Bookmarks Compose message Convert char. code Image display Internet . Last URL My Menu	160 164 161 161 161 163 163
Accessing Sites Bookmarks Compose message Convert char. code Image display Internet Last URL Navigating and Performing	160 164 161 161 161 163 163
Accessing Sites Bookmarks Compose message Convert char. code Image display Internet Last URL My Menu Navigating and Performing Operations on Web Sites	160 164 161 161 161 163 163
Accessing Sites Bookmarks Compose message Convert char. code Image display Internet Last URL My Menu Navigating and Performing Operations on Web Sites Reload image	160 164 161 161 161 163 163 163 163
Accessing Sites Bookmarks Compose message Convert char. code Image display Internet Last URL My Menu Navigating and Performing Operations on Web Sites Reload image Retry	160 164 161 161 161 163 163 163 163 164 174
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display Internet Last URL My Menu Navigating and Performing Operations on Web Sites Reload image Retry Save in Phonebook	160 164 161 161 161 163 163 163 163 163
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display Internet . Last URL My Menu Navigating and Performing Operations on Web Sites Reload image Retry Save in Phonebook Screen Memo	160 164 161 161 161 163 163 163 163 161 174 161 161 161
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display Internet . Last URL My Menu Navigating and Performing Operations on Web Sites Reload image Retry Save in Phonebook Screen Memo Sound effect	160 164 161 161 163 163 163 163 163 161 174 161 161 165 170
Accessing Sites Bookmarks Compose message Convert char. code Image display Internet Last URL Navigating and Performing Operations on Web Sites Reload image Retry Save in Phonebook Screen Memo Sound effect View certificate	160 164 161 161 161 163 163 163 163 163 161 174 161 165 170 161
Accessing Sites Bookmarks Compose message Convert char. code Image display Internet Last URL Navigating and Performing Operations on Web Sites Reload image Retry Save in Phonebook Screen Memo Sound effect View/Copy URL	160 164 161 161 161 163 163 163 163 164 164 165 170 161 161
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display Internet Last URL My Menu Navigating and Performing Operations on Web Sites Reload image Retry Save in Phonebook Screen Memo Sound effect View/Copy URL i-mode Mail	160 164 161 161 161 163 163 163 163 163 163 164 161 165 170 161 161 180
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display Internet Last URL My Menu Navigating and Performing Operations on Web Sites Reload image Retry Save in Phonebook Screen Memo Sound effect View/Copy URL i-mode Mail	160 164 161 161 161 163 163 163 163 164 164 165 170 161 161
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display Internet Last URL My Menu Navigating and Performing Operations on Web Sites Reload image Reload image Reload image Save in Phonebook Screen Memo Sound effect View Certificate View/Copy URL i-mode Mail i-mode Password i-mode Setting	160 164 161 161 161 163 163 163 163 163 163 164 161 165 170 161 161 180
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display Internet Last URL My Menu Navigating and Performing Operations on Web Sites Reload image Reload image Reload image Save in Phonebook Screen Memo Sound effect View Certificate View/Copy URL i-mode Mail i-mode Password i-mode Setting	160 164 161 161 161 163 163 163 163 163 163 164 161 165 170 161 161 180
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display Internet Last URL My Menu Navigating and Performing Operations on Web Sites Reload image Reload image Retry Save in Phonebook Screen Memo Sound effect View certificate View/Copy URL i-mode Mail i-mode Setting Certificate	160 164 161 161 161 163 163 163 163 163 163 161 174 161 165 170 161 161 180 129
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display Internet Last URL My Menu Navigating and Performing Operations on Web Sites Reload image Reload image Retry Save in Phonebook Screen Memo Sound effect View certificate View/Copy URL i-mode Mail i-mode Setting Certificate Check i-mode setting	160 164 161 161 161 163 163 163 163 163 164 161 165 170 161 161 180 129 174 170
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display Internet Last URL My Menu Navigating and Performing Operations on Web Sites Reload image Retry Save in Phonebook Sourd effect View certificate View/Copy URL i-mode Mail i-mode Setting Certificate Check i-mode setting Check new message	160 164 161 161 161 163 163 163 163 163 164 161 165 170 161 161 180 129 174 170 201
Accessing Sites Bookmarks Compose message Compose SMS Convert char. code Image display Internet Last URL My Menu Navigating and Performing Operations on Web Sites Reload image Retry Save in Phonebook Screen Memo Sound effect View certificate View/Copy URL i-mode Mail i-mode Setting Certificate Check i-mode setting Check new message Connect to Certificate Center	160 164 161 161 161 163 163 163 163 163 163 163
Accessing Sites	160 164 161 161 161 163 163 163 163 163 163 163
Accessing Sites Bookmarks Compose message Convert char. code Image display Internet Last URL My Menu	160 164 161 161 161 163 163 163 163 163 163 164 174 165 170 161 161 180 129 174 170 201 27 175
Accessing Sites	160 164 161 161 161 163 163 163 163 163 163 163

Index

Image display 170
i-motion Auto Play 177
Message attached melody
Message auto-display 172
Reset i-mode 170
Scroll
Sound effect 170
Use registered data 170
User Certificate
i-motion
Downloading 176
i-motion Auto Play 177
In Camera
Inbox
In-Call Timer
In-Car Handsfree 63
Incoming Call Mgmt
Incoming Call Setting 285
Infrared communication 252
Authentication Password
Infrared port
Receiving All Data 255
Receiving Data One Piece at a
Time
Sending All Data 255
Sending Data 1 Piece at a Time
Infrared port
Infrared Remote Control 256
International Access Code 60
Auto-Assist Settings 60
8
Setting
International Roaming 306
Intl Dial Settings 60, 311

J

κ

Key Volume						114
Kuten Code						
Enter						302

L

Index/Quick Manual Index

Language	. 48
Lock Application	133
Lock Application Setup	133

М

Macro Mode Switch	30
Mail	
Auto sort	202
Check address	
	9, 200
Check attachment 19	9, 200
Delete 19	9, 200
Displaying 19	91, 194

Forwarding	192
	200
Registering to Phonebook	203
	192
Replying	191
Save image	168
Search 198,	200
Send all entries	198
Set security/Release securit	y
	197
View URL	199
Mail Setting	
Check new message	
	201
Edit quotation mark	202
Font size	202
	202
Melody Auto Play	
Receive attachment	
Receive Option	201
Receive preference	201
Register Sending Group	
	203
Reset Mail	202
	202
0	202
Mail To Function	169
Main Menu	121
Major Specifications	364
Manner Mode	117
Mode	118
Setting Actions in Original	
Manner Mode	119
Manner Mode	
Master Clear	277 277
Master Clear	277 277
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA	277 277
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset	277 277
Master Clear Master Reset Maximum Number of Savable, Protectable in the FOMA Handset Melody	277 277 365
Master Clear Master Reset Maximum Number of Savable, Protectable in the FOMA Handset Melody Add To Playlist	277 277 365 242
Master Clear Master Reset Maximum Number of Savable, Protectable in the FOMA Handset Melody	277 277 365 242
Master Clear Master Reset Maximum Number of Savable, Protectable in the FOMA Handset Melody Add To Playlist	277 277 365 242
Master Clear Master Reset Maximum Number of Savable, Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup	277 277 365 242 242
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 	277 277 365 242 242
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 	277 277 365 242 242 243
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 	277 277 365 242 242 243
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 	277 277 365 242 242 243 243
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 	277 277 365 242 242 243
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 	277 277 365 242 242 243 243
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 	277 277 365 242 242 243 243 243 242
Master Clear	277 277 365 242 242 243 243 243 242 241
Master Clear Master Reset Maximum Number of Savable, Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 	277 277 365 242 242 243 243 243 242 241 241
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup Melody Setup 	2777 2777 3655 242 242 243 243 243 243 242 241 241 241
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 	2777 2777 3655 242 242 243 243 243 243 242 241 241 241
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 241, 242, Setting as a ringtone Setting as an alarm tone 	2777 2777 3655 2422 2422 2433 2443 2443 2441 2441 2441
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 	2777 2777 3655 2422 2422 2433 2443 2443 2441 2441 2443 2444
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 241, 242, Setting as a ringtone Setting as an alarm tone 	2777 2777 3655 2422 2422 2433 2443 2443 2441 2441 2443 2444
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 	2777 2777 3655 2422 2422 2433 2443 2443 2441 2441 2443 2444
Master Clear	2777 2777 3655 2422 2422 2432 2433 2433 2441 2411 2411
Master Clear Master Reset Maximum Number of Savable/ Protectable in the FOMA Handset Melody Add To Playlist Filter by Melody Setup 	2777 2777 3655 2422 2422 2432 2433 2433 2441 2411 2411

Memory usage	
Video camera	148
Menu List	318
Menu operations	
	. 37
	. 35
•• • •	. 00 . 37
· · · · · · · · ·	. 38
Message R/F	. 00
Check attachment	174
Delete	173
Displaying	172
Message attached melody	172
	172
Message auto-display	172
Protect/Release	173
Reload image	174
Save Image	168
Save Phonebook	174
microSD Memory Cards	249
Folder Structure	251
Formatting	250
Inserting/Removing	249
Missed Call	. 73
Move File	
Melody File	242
Still Image File	228
Video/i-motion File	234
Voice Note	247
Multi Number	286
Confirming Primary Number	r
Settings	286
Registering	286
Selecting Dial Number	287
Setting Default	286
Multiaccess	258
Combinations	338
Multi-function Key	. 30
· · · · · · ·	. 31
Multi-Key	. 65
Multitask	258
Combinations	339
My Menu	163
	314
	265
My Number 50,	265 265
My Personal Info	265
My Pictures	227
Ν	

Ν

Network Search	314
Network Security Code	128
Network Services	279
Network Setup	313
New Word Dictionary	302
Not in Phonebook	138
Nuisance Call Barring	283
Rejecting Number to Be	
Rejected	284

О Оре

Open To Answer											65
----------------	--	--	--	--	--	--	--	--	--	--	----

Options and Related Devices

	340
Out Camera	. 31
Outbox	194
Overseas Use	305
Available Services	306
Making Calls	309
Network Services	316
Overseas Use	308
Preparation before Departu	re
	307
Receiving Calls	312
Setting after Return	309

Ρ

Pairing	272
Passkey 24,	272
Password	
i-mode Password	129
Pause	
	131
Phone To/AV Phone To Funct	
	169
Phonebook	91
About Phonebooks.	
Default Storage	108
Deleting.	107
Phone Capacity	109
Reject Calls	
Saving (from Received Calls	.)
	<i>'</i>
Saving in the FOMA Handse	
Contacts.	93
Saving in the UIM Contacts	
Search.	100
Selecting Multiple Contacts	
	107
Setup	108
Speed Dial	109
UIM Capacity	109
View	104
Viewing a Phonebook Entry	
	102
Phonebook Search	100
Alphabet	101
Filter by	104
Katakana	101
Number	101
Speed No	102
Symbol	101
Pictograph (E-Moji)	
	299
List	331
PIN Unlock Code 129,	131
Placing a Call on Hold	83
Playing Videos/i-motion Movie	
, 0	233
Fast Forwarding/Rewinding	
· · · · · · · · · · · · · · · · · · ·	
Key operations	233
,	

Q

R

Reason for No Caller ID 137
Receive option
Received Calls
Saving Contacts to the
Phonebook
Record Message 73
Deleting
Lock
Playing 77
Response Greeting 75
Setting 74
View Free Space 78
Remaining call cost
Remote Control
Rename File
Melody File
Video/i-motion File 234
Voice Note
Reset Learned Data 303
Resetting All Costs
Response Hold 68
Ring Delay 138
Ring Lights
Ringer Options
Roaming Guidance 315
Roaming Guidance Intl 316

s

SAR
Scanning Function
Screen Memo
Convert char. code 167
Delete
Edit title 166, 167
File property 167
List
Protect/Release
Retry
Saving 165
View certificate 167
View/Copy URL 167
Viewing
Screen Saver

Scroll	126 100
Secret Data	136
Security Code	128
Security Settings 127,	139
Self Mode	132
Send File	
Melody File	242
Still Image File	
Video/i-motion File	
Service Dial	
Service Tone	315
Services Available from FOMA	
Handset	
Sidekey Lock	136
Sidekey Shortcut	136
Skin	122
SMS	
Check address	
	200
Confirming an image	
Creating	206
Delete 197, 199,	200
Font size	
Forwarding	192
Protect/Release	
	200
Registering to Phonebook	200
	100
	192
Replying	191
Save	207
Scroll	202
Search 198,	200
Send	206
Send all entries	198
Set security/Release securit	
	197
UIM 198,	
View URL	199
SMS Settings	207
Auto sort.	202
Message Validity	
Quote (Receiver)	
Report Request.	
SMS Center	
Soft Keys	. 34
Software Update	357
Sort	
i-appli	218
Inbox	
	173
Outbox	195
Screen memos	167
Unsentbox	195
Sort Folders	
Bookmark	165
	197
Screen Memo	166
Speaker Phone	. 0/
Speed Dial 109,	110
SSL communication	

Index/Quick Manual Index

Stereo Headset
Making a Call 271
Receiving a Call 271
Still Image
Add To Album
Camera Off Image 228
Editing 230
Filter by
Phonebook Entry
Pictures Setup
Screen Saver
Wallpaper
Storage Devices 227, 276
Sub Address 61
Sub-display
View
Symbol
Enter
List

т

Talking via Bluetooth 63
Task
Checking Task
Create New Task 262
Delete
Setting 265
Telop
i-Channel
i-motion 176, 233
Template 188
Creating 188
Selecting
Template List 189
Text Marquee
Time and Date 48, 124
Touch-tone Signals
Insert "n"
Insert "Pause" 57
Insert "Wait"
Trademarks 27
Troubleshooting

U

UIM
Inserting/Removing 39
Restricted Operations 40
Security Code 40
Types
UIM PIN 129, 130
Changing 130
UIM PIN2
Changing 130
Unlock Code 128
Unsentbox 194
User Certificate
Requesting revocation 174

V

Vibrate

Vibrate Detail	
Video Call Settings	
Video Calls	
Action List	
Alternate Image	
Brightness	
Change Action	
Changing to Mirror Image	
•••••	
Chara-den	85
Handsfree Call	
Lighting Conditions	
Making	80
Placing a Call on Hold	
Receiving	
Switching Camera Image	
Cuvitabing View	
Switching View Video Camera	00
Record Video	147
	147
Video Camera Settings	140
Brightness	149 148
Light On/Light Off Lighting Conditions	
Mirror	
Recording Sound	
Resolution	
Saving Destination	140
Switch	148
0	
Video Length	
Video Quality	
Video Play Software	
Video/i-motion	
Add To Album.	234
Editing	
Filter by	
Set as Alarm	
Set as Ringtone	234
Set as Screen Saver	
Videocall Answer Hold	
Videocall Hold	
Viewing File Info	
Animation File	232
Chara-den file	
Melody file	
Still image file	
Videos/i-motion movies	
Voice Notes	
Viewing Number.	
Voice Notes	
Add to Category 24	
Apply as Ringtone 24	
Filter by	
Free Space	
My Notes	
Play	
Preview	

Recording	245
Saving to My Notes	248
Setting to an alarm tone	
	247
Voice Recorder Setup	246
Auto Save	246
Record Length	246
Voicecall Answer Hold Tone	
	. 68
Recording	. 69
Voicemail	280
Incoming Alert	281
Voicemail Intl	316

w


Wallpaper	120
Warranty	356
Web To Function	169
WORLD CALL	. 58
World Clock	269
WORLD WING	306


How to Use the Quick Manual


Detach the Quick Manual from this manual.

- You can find a quick manual for "Overseas Use" after the regular quick manual, convenient for overseas trips.
- When using scissors, be careful not to hurt yourself.

Detach the Quick Manual by cutting along the cutoff line










Fold widthwise twice



Cutoff line			
		5	
Entering Characters Image: Notes: UpperLower UpperLower UpperLower a about all also ortharacters/yes a about all also option Switching entry modes Conversion A. [Function] * "Entry Mode" * Select an entry mode * M [Select] Switching rul-pitch (for 1+ seconds) Switching upper/lower case Enter a character * 🕮	 4 Select a phone number to overwrite ▲ [Select] 5 Store/Edit the Contact ● ▲ [Complete] Editing Contacts ♦ Select a Phonebook ● ▲ [Function] ● "Edit Contact" ● Store/Edit Contact ● ▲ [Complete] 	 6 "Category'♦ Select a category ♦ ▲ [Select] 7 ► [Complete] 7 ► [Complete] 1 Use () () to display the Received Calls/Dialed Calls/Dialed Calls ♦ Select the Received Calls/Dialed Calls ♦ ▲ [Function] ♦ "Store" 2 Select a storing method "Create New Contact": Go to Step 5 If no entry is saved in the Phonebook specified as the "Default Storage", the Create Contact screen opens. Go to Step 5. 3 Select a Contact to save ♦ ● Go to Step 5 if you select "Add to Contact" 	Saving Contacts on the UIM 1
 14 "Birthday" ♦ Use ⊖ to select "Day", "Month", and "Year" field ♦ Use ①//Dial keys to enter the Birthday 15 "Secret" ♦ "Yes"/'No" 16 "Reject" ♦ "Yes"/'No" 17 "Notes" ♦ Enter a note 18 i [Complete] 18 [Complete] 	 5 "Number" ← Enter a phone number ↓ "Type" ← Select a type ♦ ▲ Select] ↓ "Video Number" ◆ "Yes"/No" 6 "Email" ← Enter the mail address ◆ "Type" ◆ Select a type ♦ ▲ Select] 7 "Store to" ◆ "Phone" 8 "URL" ◆ Enter the URL 9 "Postal Address" ◆ Select an item to save ◆ ④ ← Enter an address, etc. ● ▲ [Select] 10 "Category" ◆ Select a category ♦ ▲ [Select] 11 "Picture ID" ◆ Select an image or video/ i-motion 12 "Ringer ID" ◆ Select Chara-den 13 "Chara-den" ◆ Select Chara-den 	Saving Contacts Saving Contacts on the FOMA Handset (Phone) 1 • "[New Entry]" I Create Contact Number: Image: Number: Number: Number: Number: Number: Number: Number: Number: Number: Number: Nickname: Enter a name 3 "Reeding" • Enter a reading 4 "Nickname" • Enter a nickname	Figure FOMA MT02iG Quick Manual DoCoMo Information Center For a DoCoMo Instetor PHS: 151 (re area code) (rd free) 151 (re area code) (rd free) 150 of 22-005-250 (for an a taked ine phone. For a DoCoMo handset or PHS 151 (re area code) (rd free) 151 (rd fre

Operations on the i-motion playback scene provide the state of t	 Entering message text Select [Intersection [Intersection] Sending i-mode mail Sending i-mode mail Select [Intersection] Attaching an image Attaching an image Attaching an image Select a folder ♥ ● ● * Select an image * ● ● * Attach image * ● ● ● ● * Attach image * ● ● ● * Attach image * ● ● ● * Attach image * ● ● ● ● ● * Attach image * ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●
Playing an Image/Video/Melody Displaying Images Displaying Images 1 • 2 Select a folder ♦ • Select affile ♦ Coperations on the still image display screen • • • • Coperations on the still image display screen • • • • • • • • • • • • • • • • • • <	i-mode Mail Creating/Sending i-mode Mail Displaying the Compose message Screen Displaying the Compose message Displaying the Compose message Message and the compose message Message and the server Message and the server Displaying the compose message Message and the server Message and
 " ⊂ (Co)": Press and 5 times * ⊕ (Mo)": Press (Joins 5 times 2 Use (Q) to move the cursor to conversion options > Use (Q) to move the cursor to conversion options > Use (Q) to address (DoCoMo)" > A. (Confirm) 2 Use (DoCoMo) > A. (Confirm) Using the Camera (Capturing Still Images (DoCoMo) (DoCoMo) (DoCoMo) (DoCoMo) (DoCoMo) (DoCoMo) (DocMo) (DoCoMo) (DoCoMo) (DoCoMo) (DoCoMo) (DoCoMo) (DoCoMo) (DoCoMo) (DoCoMo) (DoCoMo) (DoCMO) (DoCOMO) (DoCMO) (
Adding/Entering voiced/semivoiced sound symbol Enter a character in Hiragana/Katakana entry mode ◆ 通言 (Press more than once) Entering punctuation (Press more than once) (Press more than once) (Press more than once) (Press more than once) (Or 1+ seconds) Entering Pictograph (E-Moji)/Emoticon/Symbol (Confirm) (Confirm) (Confirm) (Entering * ドコモ (DoCoMo)" * ど (Do)": Press (5 times ◆ * once	 (A) (A) (Holding down): Flewind the melody while pressed melody while pressed (A) (Holding down): Flewind the melody while pressed (A) (A) (A) (A) (A) (A) (A) (A) (A) (A)

	Icon Function Name Connection "(Infrared Link) Webwork Services Call Environmediation Adding "(Use tooth Link) Wolcernall "(Use tooth Link) Caller Forwarding Caller Forwarding Caller Forwarding Caller Forwarding Caller ID Request Incoming Call Service Incoming Call Service Caller ID Request Additional Neg Additional Service Additional Service Caller Howork Gaudance Language Data Numote Data Barring - Roaming Caller Barring - Roaming Roaming Guidance Service Dial Settings Sourd Profiles Settings Sourd Profile Settings Sourd Profile	16	 Capturing and attaching a still image/video On the Compose message screen (P14), select III (Attachment] field ◆ ③ + "Snap photo?"Shoot movie" ◆ Capture a still image/video ◆ ▲ [Inser] Receiving i-mode Mails 1 Frode mail arrives ◆ "Mail" ◆ Select the folder ◆ ④ ★ Select an i-mode mail to display ◆ ④ Checking new messages 1 Press wice in a row Other Mail Functions Papiving to Mail Select or display the mail to be replied to A [Inuction] ◆ Freeby with quotation" ◆ Enter message text ◆ ④ ◆
	Icon Function Name Personalize Personalize Personalize Personalize Main Menu Sin Sin Greeting General Settings Greeting Wallpaper Sin Sin Manner Naver Manner Mave Sin Manner Mare Sin Sigsed Dial Disput Timeout Bisplay Timeout Sin Sindight Charging Lights SortEnny Engines Text Enny Display Timeout Master Reset Diste and Time In-Cail Time In-Cail Time	17	■ Forwarding Mail Select or display the mail to forward ♦ (
	Ion Function Name In-Call Satup Call Cest Satup Videocall Settings Videocall Settings Answer Options Call Hold Settings Call Ford Settings Sub Address Sub Address Sub Address Network Fing Delay Network Sub Address Valuestatings May Network Valuestatings Sattings Sattings Sattings Sattin Sattings Sat	18	Function Name Icon Function Name Imde Menu Bookmark Go to location Ga to location Gasting Screen memo Last URL MessageF Check new message Imode SWAP Wall Outbox Outbox Compose message Compose SMS message Check new message Contex SMS SWAP Contex SMS Contex SMS Contex SMS Contex SMS
23	Icon Function Name Security Security Settings Security Settings Sidekey Lock Sidekey Lock Sidekey Lock UIM PIN2 UIM PIN2 New Passwords Headser Atto Answer Sidekey Lock Saft Mode Finone Status Finone Status Maner Options Starage Devices Scanning Function Scanning Function Statware Update Manner Mode Manper Stream	19	Icon Function Name Mail Mail setting Phonebook Mail setting Phonebook Immolion Otabox Immolion Alamatons Voice Notes Alamatons Toksage Calalocok Barebook Barebook Barebook Barebook <td< td=""></td<>

Service Borne Number Time (rharges apply) (No perity) 117 Weather report (charges apply) (No perity) 117 File and antulatore emergencies (No perity) 118 Marine emergencies (No perity) 118 Marine emergencies (No perity) 118 Marine file and antulatore emergencies (No perity) 118 Message Jall n a disater (No	DoCoMo Information Center Free a DoColvo handset or PHS: 151 (no near coal) (coll free) 17the above number is not available from a fixed line phone. 17the above number is not available from a fixed line phone. 101(res) (n Englis) 17the above number is also available from a DoColvo handset or PHS. 17the above number is not available from a fixed line phone. 17the above number is not available from a fixed line phone. 17the above number is not available from a fixed line phone. 17the above number is not available from a fixed line phone. 17the above number is not available from a fixed line phone. 17the above number is not available from a DoColvo handset or PHS. 17the above number is not available from a fixed line phone. 17the above number is not available from a DoColvo handset or PHS.	
Call Forwarding Activating Call Forwarding Activating Call Forwarding Activating Call Forwarding Enwarding * "Activate" * "Number" Forwarding * "Activate" * "Number" Collection Call Envariance "Ringing Time" * Use Operating Call Forwarding Use Deactivating Call Forwarding Call Deactivating Call Forwarding Call Erversion Call Operating Call Forwarding Call Operating Call Forwarding Call Operating Call Forwarding Call Operating Call Call Operating Call Call Operating Call Call Operating Call Call Operating Statue Call Oper	 (Yellow) There is a MessageF at the i-mode Center (Red) MessageF on the handset is full (Yellow) There is an urread MessageF (Yellow) There is an urread MessageF (Yellow) There is a messageF at the i-mode Center is full (Yellow) There is a MessageF at the i-mode Center An i-appli is running/i-appli set for the Wallpaper screen is running An i-appli is trunning/i-appli set for the Wallpaper screen opens (Yellow) There is a the screen is running An i-appli stand-by screen opens (Yellow) There is a the Sound Style 1" (Yellow) There is set to "Yorafle" is set to "Vibrate" (Interview) There is set to "Vibrate" (Interview) There is set to "Vibrate" (Interview) There is set to "Vibrate" 	
Call Waiting Activating Call Waiting Activating Call Waiting • * Activate* > A. (Network Services) > "Call Waiting • * Activate* > A. (Yes) Deactivate* > A. (Yes) Deactivate* > A. (Yes) Deactivate* > A. (Yes) Answering Incoming call Putting Current Call on Hold (Network Services) > "Call Waiting" Incoming call > Answer/(E) Switching the calls (Yes) Incoming call > Answer/(E) Switching the calls (Yes) Incoming call > (Yes) Incoming call putting Current call (Yes) Income call put on hold (Yes) (Yes) (Yes) Incoming call > (Yes) (Yes) (Yes) (Yes) Incom	 "Dialing restrictions" are set to "On" and there is a trunction to be locked "Secret Data" is set to "Show" There is a new message in Voicemail service (Blue) There is a new message in the Record Message (Blue) There is a new message in the Record Message (Blue) There is a new message in the incode mail at the indomesian the immode Center is full (Yellow) There is an unread indome immode Center (Yellow) There is an unread is full (Yellow) There is an unread indomesian 	
Public Mode (Drive Mode) Image: Seconds) on the Wallpaper screen Metwork Services Network Services Voicemail Playing Messages Paying Messages Provide (Network Services) ♦ "Voicemail" ♥ Playing Messages Provide alidance Activatie ♥ ▲ [Yes] ● ▲ [Yes] ● Los ♠ Mactivatie ♥ ▲ [Yes] ● ▲ [Yes] ● Use ♠ Dial keys to enter Inging Time Dial keys to enter Inging Time Deactivate ♥ ▲ [Yes] Deactivate ● ▲ [Yes] Deactivate ● ▲ [Yes] Deactivate ● ▲ [Yes]	 During i-mode Public Mode (Drive Mode) is set Inthe area where packet communication is available (location registered) Within the area where packet communication is communication is communication is used infrared communication via Infrared infrared communication is connected in Standby/Infrared remote control is used Is Uning a voice call Uning a vice call During a vice call There is a datebook Event/Task in which Reminder Bar There is a set alarm 	

Service 3G GSM GPRS Voice Call 0 × × × Imode 0 × × × × Imode 0 ×	For loss or theft of the handset or charges while overseas <a "0"="" (city="" (in="" (zero)="" -="" 2="" @:="" a="" area="" as="" be="" call="" call<="" city="" code="" code)="" codes="" countries="" country="" fhs="" from="" href="https://www.example.com/bit/bit/bit/bit/bit/bit/bit/bit/bit/bit</th></tr><tr><th>Making a Call Nukkings Call to Agaror Quurties Other than the Quurting Others 1 <u>•</u> or 1+ seconds) ◆ Enter " italy,="" japanese="" leading="" make="" may="" mobile="" number="" number"="" of="" omit="" or="" p12="" phone="" regions="" required).="" some="" such="" th="" the="" video="" voice="" •="" →=""><th> Handset Failure while Overseas (Network Technical Operation Center) (Open 24 hours) Universal Number Pione Code for number on the left is number on the left is numerational Phone Code for numerational Access Codes a Universal Number Table 1 900-593 - 8000 Omesis Call charges for your oversaes location may our oversaes location may your herades Universal Number an noble phone, or a phone in a hould. For international Access Codes a Universal Number an outbin phone, public phone, or a phone in a hould. For international Phone Code for a Universal Number (Table 1) and International Phone 2 are subject to charge. For international Phone Code for a Universal Number (Table 1) and International Phone Code for a Universal Number (Table 1) and International Phone Code for a Universal Number (Table 1) and International Phone Pione Courties (Table 2), see P 13 and P14 in Cluck Marual Overseas User respectively. </th>	 Handset Failure while Overseas (Network Technical Operation Center) (Open 24 hours) Universal Number Pione Code for number on the left is number on the left is numerational Phone Code for numerational Access Codes a Universal Number Table 1 900-593 - 8000 Omesis Call charges for your oversaes location may our oversaes location may your herades Universal Number an noble phone, or a phone in a hould. For international Access Codes a Universal Number an outbin phone, public phone, or a phone in a hould. For international Phone Code for a Universal Number (Table 1) and International Phone 2 are subject to charge. For international Phone Code for a Universal Number (Table 1) and International Phone Code for a Universal Number (Table 1) and International Phone Code for a Universal Number (Table 1) and International Phone Pione Courties (Table 2), see P 13 and P14 in Cluck Marual Overseas User respectively.
 Making a Call within the Country of Stay 1 Enter the phone number with the area code (city code) in the same way as in Japan 2 Call ● //●: Make a voice call ● //●: Make a video call 3 The two particular structure and the call 	Display An icon indicating the currently connected network appears on the Display and Sub- display. The connected carrier name also appears on the Display. Image: Connected transmit in the connected network in Japan Sector to a GSM network overseas Sector connected to a GSM network overseas Sector connected to a GPRS network overseas overseas Image: Connected to a GPRS network overseas overseas Image: Connected to a GPRS network overseas overseas Image: Connected to a GPRS network Image: Connected to a GPRS network Image: Connected carrier name	
Receiving Calls 1 A call arrives • ↓↓.: Stop the ringtone or vibration • • 2 Answer the call on response hold 2 Answer the call on response hold 2 Answer the call on response hold 2 Answer the call • 	Switching Networks Setting Networks "Network Setup" is set to "Automatic" by default. When you use the FOMA handset in Japan or in the areas where 3G area network is available. it is recommended to switch "Band" to "3G" to reduce the consumption of the battery pack. 1 ● If (Settings) ● "Network Manually 1 ● If (Settings) ● "Network" ● "Network Setup" 2 2 "Band" ● "GSM 1900"/"GSM 900/1800"/ "3G" "W Search Mode" ● "Manual" 4 [Complete] • When the Manual list screen opens, select a network and press [Flegister].	

Cutoff line

After Coming Back to Japan After coming back to Japan, the FOMA network will be connected automatically and appear. • If the FOMA network is not connected, verify that "Band" is set to "Automatic" and "Typpe" is set to "Automatic" and "Type" is set to "Automatic" and	Contact Information For loss or theft of the handset, settlement of charges, or handset failure while overseas, comact the DoCoMo Information Center on the front page of "Overseas Use" or the Network Technical Operation Center on Page 1. • The contact numbers must be prefixed with the code assigned to the country of stay as shown in the "International Phone Code for a Universal Numbers (Table 1)" or "International Access Codes of Major Countries (Table 2)".	— — — — <mark>15</mark> — _{Cutoff line} — —
Voicemail (Overseas) ● ▲ (Network Services) ◆ "Voicemail" ◆ "Voicemail International" ◆ "Play Messages"/ "Voicemail International" ◆ "Activate" Deactivate ● ▲ (Network Services) ◆ "Call Forwarding (Overseas) ● ▲ (Network Services) ◆ "Call Forwarding International" • "Activate" ◆ Follow the instructions of the voice guidance instructions of the voice guidance • ▲ (Network Services) ◆ "Roaming Guidance International" • Follow the instructions of the voice guidance	Autactional Access Codes of Major Countries (Table 2) Autactional Access Codes of Major Countries (Table 2) Australia Number Arrea Number Australia 0011 Macroso 00 Brazil 0023 Number 00 Brazil 0021 Number 00 China 001 Nuwes 00 Defending 001 Nuwes 00 China 001 Nuwes 00 France 00 Singapore 00 France 00 Singapore 00 France 001 Turkey 00 Indomesia 001 Turkey 00 Indomesia 001 U.K. 00 Indomesia 00 U.K. 00	
Network Services Remote Control Remote Control • Setting must be done while in Japan. • A (Network Services) • "Remote Control" • "Activate"/Deactivate" Borning Guidance • A (Network Services) • "Remote Control" • "Activate"/Deactivate" Betting must be done while in Japan. • A (Network Services) • "Paraming Guidance • " Activate * Peacritate" Barring - Veacrivate Call Barring - Roaming Guidance • " Activate - All Calls"/Activate - Data Only"/Deactivate • Totals"/Activate - Data Only"/Peacrivate • Totals"/Activate - Data Only"/Peacrivate • Totals"/Activate - Data Only"/Peacrivate • Markivate • Markiv	Area Number (Table 1) Area Number Number Number Area Number Area Number Area Number Area Number Area Number Area Number Area Number 00 Number 00 Area 00 Number 00 Number 00 Australia 00 New Zaaland 00	
Setting Preferred Networks 1 ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●	Area Number Area Number Number Australia 61 Number Mumber Australia 61 Madrives 960 Australia 63 New Caledonia 97 Australia 63 New Caledonia 97 Baigum 22 New Zaladonia 63 Caradia 63 South Korea 63 Fiji 729 Supprise 63 Financei 93 94 7 Czech 420 Philippines 63 Fiji 73 59 144 Craech 95 Tankian 68 Hungary 95 Tankian 68 Hungary 95 Tunkan 68 Hungary 96 U.K. 44 Malaysia 90 U.K 44	

Don't forget your FOMA handset ... or your manners!

When using the FOMA handset, be considerate and do not disturb people around you.

Always turn OFF your FOMA handset in the following situations:

Where use is prohibited

Be sure to turn off your FOMA handset in airplanes and in hospitals.

- * Persons using electronic medical equipment are in places other than the actual wards. Make sure you have the power switched off even if you are in a lobby or waiting room.
- When in crowded places such as packed trains, where you could be near a person with an implanted cardiac pacemaker or implanted defibrillator.

The implanted cardiac pacemaker or implanted defibrillator operation may be affected by radio emissions from the FOMA handset.

In the following cases, be certain to set Public Mode.

While driving

Using the FOMA handset interferes with safe driving and could cause danger.

- * Park the car in a safe place before using the FOMA handset, or switch to Public Mode.
- When in theaters, movie theaters, museums, and similar venues

If you use your FOMA handset where you are supposed to be quiet, you will disturb those around you.

Pay attention to your surroundings and the loudness of your voice and ringer

Do not raise your voice when using the FOMA handset in quiet places such as in restaurants or hotel lobbies.

Use the handset so as not to disturb pedestrian traffic.

Consider privacy

Give consideration to privacy before capturing or sending images with a mobile phone with a built-in camera.

These functions help you keep your manners in public

Handy functions are available such as for setting the response to incoming calls and setting the tones to silent.

Public Mode (Drive Mode/Power Off)

The guidance is played announcing that you are in such a place as train, bus or movie theater where you have to turn off the handset, and the call is disconnected. \rightarrow P70, P72

Record Message

Callers can record a message when you cannot come to the phone. \rightarrow P73

Incoming Vibrate


When the vibrate is set, it vibrates for incoming calls. \rightarrow P115

Manner Mode/Original Manner Mode

In Manner Mode, the keypad sound, ring tone or every other sound generated by the FOMA handset are silenced. \rightarrow P117

You can change the operation of the FOMA handset in Manner Mode (Original Manner Mode). \rightarrow P119

This manual was produced in such a way as to allow easy recycling. Please recycle this manual when it is no longer needed.

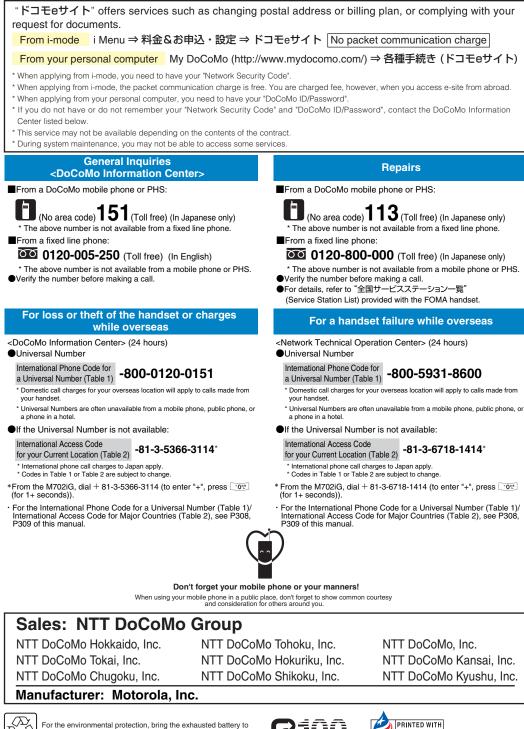

the nearest DoCoMo, dealers, or the recycle shop.





'06.11 (1st Edition) SJJN7406A

FOMA[®] M702iG Manual for Data Communication

Data Communications Before Using Preparing for Data Communication	1 2 3
Installing the Communication Configuration Files (Drivers) Connecting the FOMA Handset and PC Using the FOMA USB Cable (Optional)	4 5
Checking the Communication Configuration Files (Drivers)	6
Uninstalling the Communication Configuration Files (Drivers) Preparing for Communication via Bluetooth	7
<pre>comparing the provide state of the provide sta</pre>	7
Configuring Communication Settings Using FOMA PC Configuration Software	9
FOMA PC Configuration Software	9
Installing the FOMA PC Configuration Software Configuring Communication Settings	9 11
Start Communicating	15
W-TCP Settings	16
Setting APN	17
Uninstalling the FOMA PC Configuration Software	18
Configuring Communication Settings without Using FON PC Configuration Software	IA
Configuring a Dial-up Network	19
Communicating	24
AT Commands	26
AT Command List	27

About Manual for Data communication

This manual explains the items required for making data communication on the FOMA M702iG as well as how to install "M702iG 通信設定ファイル(ドライバ)(M702iG Communication Configuration Files (Drivers))" and "FOMA PC 設定ソフト (FOMA PC configuration Software)" inside the CD-ROM.

About Windows XP Operation

This manual explains the contents compliant with Windows XP Service Pack 2. Some procedures and displays in this manual may differ depending on your operating environment.

Data Communications

Connecting the FOMA handset and a PC allows you to use three types of data communications (packet communication, 64K data communication and data transfer (OBEX)).

Available Data Communications from the FOMA Handset

Packet Communication

Packet communication is a communication method whose charges are based on the amount of data exchanged. It allows data communication at a maximum speed of 384Kbps for receiving and 64Kbps for sending.

In order to perform packet communication, connect the FOMA handset and a PC using a FOMA USB Cable (optional) or via Bluetooth and connect to an access point of DoCoMo's Internet connection service "mopera U" or "mopera", that handles the FOMA packet communication.

 Note that the communication fees may become high if you use packet communication to send/ receive data.

64K Data Communication

64K data communication is a communication method whose charges are based on the time connected to the network. It allows data communication at a speed of 64Kbps. In order to perform 64k data communication, connect the FOMA handset and a PC using a FOMA USB Cable (optional) or via Bluetooth and connect to an access point of DoCoMo's Internet connection service "mopera U" or "mopera", that handles the FOMA 64K data communication or an access point that handles ISDN synchronous 64K.

 Note that the communication fees may become high if you use 64K data communication to connect for a long time.

Data Transfer (OBEX)

Data transfer is a communication method that exchanges data using the FOMA USB Cable, infrared, or Bluetooth.

In order to transfer data by connecting the FOMA handset and a PC with the FOMA USB Cable, data link software must be installed on the PC. In order to transfer data using infrared or Bluetooth, a communication device such as a PC must be equipped with infrared or Bluetooth capability.

Connecting the FOMA Handset and PC, etc.

The following connection methods are available to connect the FOMA handset to a PC to perform data communications:

Using the FOMA USB Cable (optional) (USB Connection)

Connecting the FOMA handset to a PC with the FOMA USB Cable allows you to use all communication methods (packet communication, 64K data communication and data transfer (OBEX)).

- The communication setup files (drivers) must be installed before connecting with the FOMA USB Cable. →P4
- When using the USB connection, set the USB mode to "Communication mode". →P5

Using Bluetooth (Bluetooth Connection)

Using Bluetooth allows you to use all communication methods (packet communication, 64K data communication and data transfer (OBEX)).

 Use a standard Bluetooth modem or a Bluetooth modem provided by a Bluetooth device manufacturer to connect via Bluetooth. For installation and configuration of a modem, contact the manufacturer of your PC or Bluetooth device.

Using Infrared

Using infrared allows you to use the communication method of data transfer (OBEX). You can exchange data with a PC, etc. with infrared capability.

Precautions before Use

Internet Service Provider Fees

Fees to an Internet service provider (ISP) may be required to connect to the Internet. These fees are in addition to the FOMA service fees and are paid to your ISP directly. For detailed information on connection fees, contact your ISP. You can use "mopera U" or "mopera", DoCoMo's Internet connection service. A separate subscription (fee-based) is required to use "mopera U". To use "mopera", no separate subscription is required, and no monthly usage fee applies.

Setting the Internet Connection (Internet service providers, etc.) Packet communication and 64K data communication use different access points. For packet communication, use an access point

compatible with packet communication, and for 64K data communication, use the FOMA 64K data communication or use an access point compatible with ISDN synchronous 64K.

· DoPa access points cannot be connected.

Continued on the next page •••

 Access points for PHS 64K/32K data communication for PIAFS, etc. cannot be connected.

User Authentication to Access Networks Depending on the access point, user authentication (ID and password) may be required to connect. If required, enter the ID and password from the dial-up network. The ID and password will be provided by the network administrator of your ISP or access point. For details, contact the network administrator of your ISP or the access point.

Required Conditions for Packet and 64K Data Communications

The following conditions must be met to perform communications using the FOMA handset (a connection may not be established if traffic is heavy at the base station or if radio signals are weak).

- The PC must have an interface for the FOMA USB Cable.
- To connect via Bluetooth, the device such as a PC must be compatible with Dial-Up Networking.
 Profile of Bluetooth standard Version 1.2
- The FOMA handset must be in a FOMA service area.
- The access point must support FOMA packet communication for packet communication.
- The access point must support FOMA 64K data communication or ISDN synchronous 64K for 64K data communication.

Data Communication Glossary APN (Access Point Name)

Identifies an access point (ISP or LAN) for packet communication. The Internet connection service for DoCoMo, "mopera U" has "mopera.net" as its APN.

cid (Context Identifier)

A registration number of an APN of packet communication to the FOMA handset. The FOMA handset can contain up to 10 APNs using cid 1 - 10.

DNS (Domain Name System)

The database system that translates a domain name address such as "nttdocomo.co.jp" into a numerical IP address for PCs.

OBEX (Object Exchange)

A protocol for file transfer defined by IrDA (Infrared Data Association). Data such as Contacts, Schedule events, or images can be exchanged with devices that handle the OBEX protocol.

QoS (Quality of Service)

Indicates the network service quality. You can specify conditions of data communication speed in the FOMA handset configurations (actual communication speed varies depending on the communication conditions).

W-TCP

The TCP parameter is used to get the full utilization of the TCP/IP transmission capability for packet communications over the FOMA network. The TCP parameter must be optimized to get the most out of the communication capability of the FOMA handset.

Administrator Privileges

Access rights that allow access to all functions on a Windows XP or Windows 2000 system. A user without administrator privileges cannot install or uninstall drivers or FOMA PC Configuration Software.

Before Using

Operating Environment

The following operating environment is required for a PC to use data communication:

Item	Requirement
PC Main Unit	 PC-AT compatible machine with a CD-ROM capable drive USB port (in accord with Universal Serial Bus Specification Rev1.1/2.0) Display resolution of 800x600 dots, High Color (65,536 color) or higher recommended For Bluetooth connection Dial-up Networking Profile compatible device that complies with Bluetooth Standard Version 1.2
OS*¹	 Windows XP, Windows 2000 (Japanese version)
Required Memory	 For windows XP, 128M bytes or more*2 For windows 2000, 64M bytes or more*2
Hard Disk Space	Available space of 5M bytes or more*2

*1: DoCoMo does not guarantee the operation under the supported OS if it is changed through upgrade.

*2: Required memory or hard disk space may vary depending on the PC system configuration.

Note

- Depending on the operating environment, data communication may not be available. DoCoMo does not respond to any inquiries about the use nor guarantee proper operation under operating environments other than those described in "Operating Environment".
- The FOMA handset is not compatible with Remote Wakeup.
- The FOMA handset does not support FAX communication.

Required Devices

To use data communications, the following are required in addition to the FOMA handset and a PC:


- FOMA USB Cable (optional)*
- FOMA miniUSB Conversion Adapter M01 (accessory)*
- CD-ROM for FOMA M702iG (accessory)
 - *: For a Bluetooth connection, the FOMA USB Cable and FOMA mini USB Conversion Adapter M01 are not required.

Note

 For a USB connection, purchase the exclusive FOMA USB Cable. Commercially available USB cables have the wrong shape connectors and cannot be used.

Preparing for Data Communication

The flow for preparing for packet communication or 64K data communication is as follows:

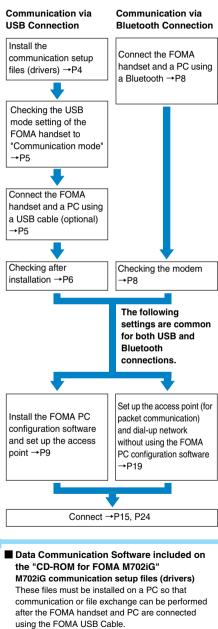

Continued on the next page •••

3

FOMA PC configuration software

This software is to be installed on a PC to quickly configure settings of dial-up connections, etc. that are required to perform data communication.

Installing the Communication Configuration Files (Drivers)

You need to install the communication configuration files so that the FOMA handset can be used from the PC before connecting the FOMA handset and the PC via USB connection for the first time.

- The communication configuration file is not required for a Bluetooth connection.
- The communication configuration files installing with the FOMA handset not connected to a PC.
- Be sure to install the communication configuration files from a user account with the administrator privileges. For settings and operations regarding PC administrator privileges, contact your PC manufacturer or Microsoft Inc.
- Check that no other software is running before installing the communication configuration files. Terminate any running software before installing the files.

Installing to Windows XP

- Insert the CD-ROM for FOMA M702iG into a PC
- 2 Click "スタート (Start)" ▶ "ファイル名を 指定して実行 (Select file name and run)" then enter " "<CD-ROM drive letter>: ¥Drivers¥Setup.exe" in "名前 (Name)"field ▶ Click [OK]
- 3 Click [インストール (Install)] Installation of the drivers begins.



If the screen to recommend the installation interruption is displayed

נליוכע	፤アのインストール
	インストールを設行した場合、システムの動作が指なわれたり、システム か子女室になるなど、華大な障害を引き起こす実現となる可能性があり すがすいやくりつびたテティドロ・私したソフトウェアを入手することを、 Wicrosoft はなく値更します。
	統行(の) インストールの停止(の)

Click [続行 (Continue)] to continue the installation. The M702iG communication configuration file operates in the same way as the software has passed the Windows logo authentication test.

Click [OK] on the confirmation screen

Connect the FOMA handset and the PC

- Connecting →P5
- After the handset is connected properly, the taskbar of the PC displays a popup message "新しいハード ウェアが見つかりました (New hardware found)" for a few seconds.

Select "いいえ、今回は接続しません (No, not this time)" ◆ Click [次へ (Next)]

 Depending on your PC status or settings, this screen may not appear. In this case, go to Step 7.



Select "ソフトウェアを自動的にインス トールする(推奨) (Install the software automatically (recommended))" ▶ Click [次へ (Next)]

新しいハードウェアの検出ウィザー	;
	このウィザードでは、次のハードウェアに必要なソフトウェアをインストールします: FORA MT0226 かかまちまなうにす用のインストート OD またはフロラビー ディ インストール方法を取べてたい。 のシジアとフジ生活の時にインストールする (開始)や 「一気などは不能のが用からインストールする (開始)や のためになったい。 日本日本ののののからインストールする (開始)や の手がなぜ、たかし をジックしてでたい。
	< 戻る(B) 法へ(U) > キャンセル

If the screen to recommend the installation interruption is displayed

Click [続行 (Continue)] to continue the installation. The M702iG communication configuration file operates in the same way as the software has passed the Windows logo authentication test.

Click [完了 (Finish)]

Install all drivers of the other three types

Install all drivers of three types performing Steps 6 to 9.

After the installation completes, the taskbar of the PC displays a popup message "新しいハードウェ アがインストールされ、使用準備ができました (New hardware installed and ready)" for a few seconds.

· Go to "Checking the Communication Configuration Files (Drivers)". →P6

Installing to Windows 2000

Insert the CD-ROM for FOMA M702iG into a PC

Click "スタート (Start)" ◆ "ファイル名を 指定して実行 (Select file name and run)" then enter " "<CD-ROM drive letter>: ¥Drivers¥Setup.exe" in "名前 (Name)"field Click [OK]

Click [インストール (Install)] Installation of the drivers begins.



continuation is displayed



Click [[tu) (Yes)] to continue the installation. The M702iG communication configuration file operates in the same way as the software has verified the Microsoft digital signature.

Click [OK] on the confirmation screen

Connect the FOMA handset and the PC

4 types of drivers are automatically installed in a row.

Connecting →P5

- If the screen to confirm the installation continuation is displayed Click [[tu) (Yes)] to continue the installation. The M702iG communication configuration file operates in the same way as the software has verified the Microsoft digital signature.
- · Go to "Checking the Communication Configuration Files (Drivers)". →P6

Connecting the FOMA Handset and PC Using the FOMA USB Cable (Optional)

This section explains the steps to connect the FOMA handset and a PC using the USB cable.

USB Mode Setting

Setting the USB Mode

Set the USB mode setting of the FOMA handset to "Communication mode"

🗩 🕈 💷 (Connection) 🕈 🖾 (USB Mode Setting)





[Change] ▶ "Communication

Connecting the FOMA Handset and PC Using the FOMA USB Cable (Optional)


Open the cover of the external connector and plug the FOMA miniUSB conversion adapter M01 (Accessory)

- · There is 2mm-gap between the handset and the FOMA miniUSB conversion adapter. This is normal.
- Plug the FOMA USB Cable connector, with the label up, straight into the FOMA miniUSB conversion adapter
 - · Slide in the connector until it securely clicks into place.

Continued on the next page •••

5

Plug the USB connector of the FOMA USB Cable to a USB connector on the PC




Note

- Use the exclusive FOMA USB Cable to connect the FOMA handset and PC. A commercially available USB cable has a different connector shape and cannot be connected to the FOMA miniUSB conversion adapter M01.
- Do not use excessive force inserting the FOMA USB Cable or FOMA miniUSB conversion adapter M01 connector. Connectors won't work unless they are inserted at the appropriate direction and angle. When connectors are inserted correctly, they can be inserted smoothly without requiring force. If you cannot insert a connector properly, do not use excess force and check the shape and direction of the connector.

Unplugging

- While pressing the release buttons of the external connector of the FOMA USB Cable, pull the cable in a horizontal position from the FOMA miniUSB conversion adapter M01
 - If you pull it forcibly, malfunction may result.
- ② Pull out the FOMA miniUSB conversion adapter M01 in a horizontal position from the FOMA handset
 - If you pull it forcibly, malfunction may result.



Checking the Communication Configuration Files (Drivers)

Check that the M702iG communication configuration file has been installed correctly.

<Example: For Windows XP>

Click "スタート (Start)" ▶ "コントロール パネル (Control Panel)" and click "パ フォーマンスとメンテナンス

(Performance and Maintenance)" 🕨


- "システム (System)"
- For Windows 2000 Click "スタート (Start)" ◆ "設定 (Settings)" ◆ "コントロールパネル (Control Panel)", and click "システム (System)"
- 2 Click the "ハードウェア (Hardware)" tab ▶ Click [デバイスマネージャ (Device Manager)]

For Windows 2000

Click the [デバイスマネージャ (Device Manager)] tab

3 Click a device name to view the installed driver name

Check that "ポート (Port) (COM/LPT)", "モデム (Modem)" and "USB (Universal Serial Bus) コント ローラ (Controller)" have drivers displayed.



Windows XP

Device	Driver
Port (COM/LPT)	 FOMA M702iG Command Port FOMA M702iG OBEX Port
Modem	FOMA M702iG
USB (Universal Serial Bus) Controller	FOMA M702iG

Note

 If the FOMA USB Cable (optional) was disconnected or the installation was cancelled by pressing [キャン セル (Cancel)] on the PC screen while the M702iG communication configuration file was being installed, the file was not installed successfully and the driver names may not be verified on the "デバイスマネー ジャ (Device Manager)" screen. In this case, uninstall then reinstall the M702iG communication configuration files.

To view the FOMA handset COM port number The modem name or COM port number of the FOMA handset may be required if you set up communication without using the FOMA PC configuration software. This section describes how to check the COM port number on the Device Manager screen.

- Connect the FOMA handset and the PC
 Connecting →P5
- ② Perform Step 1 and 2 in "Checking the Communication Configuration Files (Drivers)"
- ③ Click "モデム (Modem)" ♦ Select the "FOMA M702iG" ♦ From the menu bar, click [操作 (Operate)] ♦ [プロパティ (Properties)] ♦ Click the "モデム (Modem)" tab

The FOMA handset COM port number appears on the right side of " $\vec{\pi}-\vdash$ (Port):".



Uninstalling the Communication Configuration Files (Drivers)

To uninstall the communication configuration files (drivers), perform the following steps:

- Uninstall the files after disconnecting the FOMA handset from the PC.
- Be sure to uninstall the communication configuration files from a user account with the administrator privileges. For settings and operations regarding PC administrator privileges, contact your PC manufacturer or Microsoft Inc.
- Verify that no other software is running before uninstalling the communication configuration files. Terminate any running software before uninstalling the files.
- <Example: For Windows XP>

Insert the CD-ROM for FOMA M702iG into a PC

- 2 Click "スタート (Start)" ◆ "ファイル名を 指定して実行 (Select file name and run)" then enter " "<CD-ROM drive letter>: ¥Drivers¥M702iGUn.exe" in "名前 (Name)"field ◆ Click [OK]
- 3 Click [アンインストール (Uninstall)] Un-installation of the driver begins.



- Click [OK] on the confirmation screen
- Click [ໄປປາ (Yes)] to restart the PC

The PC reboots and un-installation completes.

Dial-up Network Gateway

Preparing for Communication via Bluetooth

This section describes preparation for communication by connecting the FOMA handset and the PC via Bluetooth.

Make the Device Registration of the FOMA Handset and PC

After the FOMA handset become search ready, search for the FOMA handset from the PC, register the device, and connect the FOMA handset and the PC via Bluetooth.

 If you connect the FOMA handset and the PC after registering the device, registering the device (Steps 1 to 4) are not necessary. For connecting the devices after they are registered, refer to the instruction manual that came with the PC or a device such as the Bluetooth adapter that is connected to the PC.

(Connection) (Bluetooth Link) "Find Me"

Turn Bluetooth

Bluetooth is off.

 This screen does not open when Bluetooth on the FOMA handset is turned on. In this case, go to Step 3.

🤈 🖃 [Yes]

Bluetooth on the FOMA handset turns on and becomes search ready. 🚷 blinks at the top of the screen.

 While the device become serch ready, if no searching operations were performed from the PC for about three minutes, the search ready state will be cancelled automatically.

3 Search and register the Bluetooth device on the PC

Select "FOMA M702iG" <checking the specifications> from the found device and perform steps to register it. The Device registration screen opens on the FOMA handset when you start the registering process.

For searching and registering devices, refer to the instruction manual that came with the PC or the device such as a Bluetooth adapter that is connected to the PC.

- It is recommended that you turn off Bluetooth devices around the PC other than the FOMA handset before searching and registering devices.
- Some instruction manuals may use "Find" for "Search" and "Pairing" for "Register".

▲ [Yes] ♦ Enter the passkey

The Passkey authentication completion screen opens on the FOMA handset after the Bluetooth connection between the FOMA handset and the PC is established.

Go to "Checking the Registered Devices". →P8

Checking the Registered Devices

Check the settings of the Bluetooth devices registered to the FOMA handset and the PC to make sure you are ready to perform data communications via Bluetooth.

 For the device name displayed on the FOMA handset and the modem name displayed on the PC, refer to the instruction manual of your PC or the device connected the PC, such as the Bluetooth adapter.

Checking the Settings of Devices Registered to the FOMA Handset

Verify the connection method between the FOMA handset and the device. Change if necessary.

● ▶ 🐏 (Connection) ▶ 😺 (Bluetooth Link) ▶ "Device History"

Bluetooth devices registered to the FOMA handset are displayed.



2 Select a device ♦ ● ♦ select "Access Settings" ▶ ● ♦ check the settings in "Dialup Networking Gateway"

Select from the following as necessary:



Always Ask

The confirmation is displayed each time you connect.

Automatic

Connection is always permitted.

Never

The connection is denied and communication cannot be performed.

Just Once

The confirmation is displayed for the first connection. Later attempts will be rejected.

Checking the Modem

Check the COM port number assigned to the modem to set up data communication.

Continued on the next page •••

<Example: For Windows XP>

Click "スタート (Start)" ▶ "コントロール パネル (Control Panel)" then click "パ フォーマンスとメンテナンス

(Performance and Maintenance)" ◆ "シ ステム (System)"

For Windows 2000

Click "スタート (Start)" ◆ "設定 (Settings)" ◆ "コントロールパネル (Control Panel)". and click "システム (System)"

- ⑦ Click the "ハードウェア (Hardware)" tab Click 「デバイスマネージャ (Device) Manager)]
- 🭳 Click "モデム (Modem)" 🕨 Select the modem name From the menu bar. click [操作 (Operate)] ▶ [プロパティ (Properties)] ♦ Click the "モデム (Modem)" tab

The FOMA handset COM port number appears on the right side of " π - \vdash (Port):".

otorola Phoneのプロパティ	?
全般 モデム 診断 詳細設定 ドライバ 詳細	
ポート: COM41	
_音量(5)	
低 🗍 👘 高	
- ボートの最高速度(M)	
57600	
タイヤルの管理	
✓発信音を待ってからダイヤルする(W)	
OK) キャンセル

Terminating a Bluetooth Connection

After data communication finished, terminate the Bluetooth connection between the PC and the FOMA handset.

Perform steps to disconnect the PC and the FOMA handset

For disconnection steps, refer to the instruction manual of your PC or the Bluetooth device added to the PC.

FOMA PC Configuration Software

Various settings regarding communication are required to perform packet communication or 64K data communication connecting the FOMA handset and PC. Using the FOMA PC configuration software allows you to perform the following settings guickly:

かんたん設定 (Easy Settings)

Follow the instructions to "Set up the dial-up connection for FOMA data communication" and at the same time "Configure W-TCP" automatically.

W-TCP Settings

Optimize the communication settings on the PC before using "FOMA packet communication". Communication settings need to be optimized by W-TCP settings in order to get the most out of the communication capability.

APN Settings

Configure the access point (APN) settings required for packet communication. The regular phone number is not used to connect to the FOMA packet communication access point, unlike 64K data communication. Save APN (Access Point Name) for each access point on the FOMA handset in advance, then specify the registration number (cid) in the access point number field to connect. "mopera.ne.ip" .the access point of "mopera", is saved in cid1 and "mopera.net", the access point of "moperaU" is saved in cid3 by default.

Note

- · You can configure settings for packet communication or 64K data communication without using the FOMA PC configuration software. \rightarrow P19, P24
- If the FOMA PC configuration software version 3.0.1 or its older version (hereafter old FOMA PC configuration software) is installed, uninstall the old FOMA PC configuration software in advance. →P11

Installing the FOMA PC **Configuration Software**

 Be sure to install the FOMA PC configuration software from a user account with the administrator privileges. For settings and operations regarding PC administrator privileges, contact your PC manufacturer or Microsoft Inc.

 Check that no other software is running before installing the FOMA PC configuration software. Terminate any running software before installing the configuration software.

<Example: For Windows XP>

- Insert the included CD-ROM for FOMA M702iG into a PC
- 2 Click "スタート (Start)" ▶ "ファイル名を 指定して実行 (Select file name and run)" then enter " "<CD-ROM drive letter>: ¥FOMA_PCSET¥Setup.exe" in "名前 (Name)"field ▶ Click [OK]

ຊ Click [次へ (Next)]

• If a message indicating that "旧W-TCP設定ソフト (Old W-TCP configuration software)", "旧APN設定 ソフト(Old APN configuration software)", or "旧 FOMA PC設定ソフト(Old FOMA PC configuration software)" is installed appears, uninstall the software referring to P9.



Click [はい (Yes)] to agree to the license agreement

Clicking [L)L) $\vec{\lambda}$ (No)] cancels the installation and the FOMA PC configuration software will not be available.

5 Checkmark 🔽 "タスクトレイに常駐する (Reside in the task tray)" ♦ Click [次へ (Next)]

After the installation, W (W-TCP settings) resides in the PC task tray. It is recommended that you keep it in the task tray because it allows you to change or view the W-TCP settings quickly.

セットアッフ [*] タイフ*			Salar S
ニースに最も適したセットアップタ	行を選択してくださし	\ ₀	
W-TCP設定をタスクトレイに対	駐させますか?		
マカスクトレイに米駐する			
nstal/Shield			

Check the installation destination folder and click [次へ (Next)]

To change the installation destination Click [参照 (Browse)] to specify an installation destination then click [次へ (Next)].

7 Check the name of the "プログラムフォル ダ (Program folder)" field ♦ Click [次へ (Next)]

FOMA PC設定ソフトセットアップ	×
プログラム フォルダの選択 プログラム フォルタを選択してください。	124
もットアックな、)なこりストされているフロケラム フィルタにフロケラム アイロノタ または政府のフィルタ・リストから1つを選択することもできます。 フロケラム フィルタ(空)	追加します。新しんい740が名を入力するか、
2015年1日の日本の10日日 現存の7345~201 国行におり	
ゲーム スタートアップ 留理型ウール	
InstalShield	8 XA N> 46706

Click [完了 (Finish)]

After the installation completes, the FOMA PC configuration software launches and the operation screen opens.

Warning or confirmation screens that open during the installation of FOMA PC configuration software

This section describes operations if a warning or confirmation opens during the installation.

If a warning indicating that the FOMA PC configuration software has already been installed appears

The old version of FOMA PC configuration software has been installed. Uninstall the old version of FOMA PC configuration software from the "プログラム追加と削除 (Add or Remove Programs)" (for Windows 2000, "アプリケーションの追加と削除 (Add or Remove Applications)", then install the FOMA PC configuration software.

If a warning indicating that an old version of W-TCP environment configuration software has been installed appears Uninstall the old version of W-TCP environment configuration software from the "プログラム追加と 削除 (Add or Remove Programs)" (for Windows 2000, "アプリケーションの追加と削除 (Add or Remove Applications)", then install the FOMA PC configuration software.

If a warning indicating that an old version of FOMA data communication configuration software has been installed appears

Click [OK] to uninstall the FOMA data communication configuration software automatically. After the un-installation, the FOMA PC configuration software installation resumes.

If a confirmation indicating to cancel the wizard appears when clicking [キャンセル (Cancel)] or [いいえ (No)]

Click [完了 (Finish)] to finish the installation. If reinstalling, perform the installation steps from the beginning.

Checking the FOMA PC Configuration Software Version

On the FOMA PC configuration software operation screen, click "メニュー (Menu)" ◆ "バージョン情報 (Version)" to open the version information screen.



Configuring Communication Settings

This section describes steps to set up packet communication/64K data communication using the FOMA PC configuration software.

 Check that the FOMA handset and the PC are connected properly before configuring the settings. →P5

Launching the FOMA PC Configuration Software

Launch the FOMA PC configuration software installed on the PC. The following can be configured from the operation screen when the FOMA PC configuration software is launched:

■ Packet communication settings using "かんた ん設定 (Easy Settings)" →P12

- 64K data communication settings using "かんたん設定 (Easy Settings)" →P14
- Optimizing and changing the transmission capability of data communication using "W-TCP Settings" →P16
- APN settings for packet communication using "APN Settings" → P17

<Example: For Windows XP>

Click "スタート (Start)" ▶ "すべてのプロ グラム (All Programs)" ▶ "FOMA PC設定 ソフト (FOMA PC configuration Software)" ▶ "FOMA PC設定ソフト

(FOMA PC configuration Software)"

The FOMA PC configuration software launches and the operation screen opens.

ஜ FOMA PC設定ソフト		- X
xla-M		
FAM	PC 設定ソフト	
_ ■オート設定(推奨) —		
かんたん設定	ガイドに従い操作することで、「FOMA 通信用ダイヤルアップの作成」や、「 の設定」などをかんたんに行います。	データ W-TCP
₩-TCP設定	FDMAパケット通信を利用するため、パソ: 通信設定を最適化します。	コン内の
接続先(APN)設定	バケット通信を行う際に必要な接続先(A 設定を行います。	PN)の
※ブログラム起動前にFOMA増末 差し替えないでください。	を接続し、設定中はFOMA端末を	¥7

For Windows 2000

Click "スタート (Start)" ▶ "プログラム (Programs)" ▶ "FOMA PC設定ソフト (FOMA PC configuration Software)" ▶ "FOMA PC設定 ソフト (FOMA PC configuration Software)"

Specifying a COM Port

When performing data communication via Bluetooth connection, you need to specify the COM port number of the PC under "通信設定 (Communication Settings)" of the FOMA PC configuration software.

- This operation is usually not required for USB connection. Perform this operation if you want to specify the COM port.
- Check the COM port assigned to the FOMA handset

Checking the COM port →P7, P8

2 From the FOMA PC configuration software operation screen, click "メニュー (Menu)" ◆ "通信設定 (Communication Settings)"

Select "COMポート指定 (Specify COM port)" ◆ Click the "COM:" field to set the COM port number assigned to the FOMA handset

• A COM port number can be specified between 1 and 99.

通信設定	X
通信标一卜指定	
C 自動設定(推奨)	○ COM标 计指定
	COM: 1 .
ОК	キャンセル
	112 69

👖 Click [OK]

Setting completes.

Setting Packet Communication Using Easy Settings

Packet communication is a communication method whose charges are based on the amount of data exchanged. It allows data communication at a maximum speed of 384Kbps for receiving and 64Kbps for sending. It is recommended that vou use "mopera U" that handles broadband connection options or international roaming to connect to the Internet using the FOMA handset (separate subscription is required). You can perform only packet communication using international roaming. Note that packet communication fees under international roaming differ from those in Japan. If you want to connect to the Internet now, "mopera" is convenient. This section describes the steps to set up a USB connection as an example.

Using "mopera U" or "mopera"

- On the FOMA PC configuration software screen, click [かんたん設定 (Easy Settings)]
- 2 Select "パケット通信 (Packet Communication)" and click [次へ (Next)]
- 3 Select "「mopera U」への接続 (Connect to mopera U)" or "「mopera」への接続 (Connect to mopera)" ◆ Click [次へ (Next)]
 - If you select "「mopera U」への接続 (Connect to mopera U)", a screen to inquire whether you are a subscriber to "mopera U" appears. Click [はい (Yes)] if you are a subscriber and continue with the settings.

\rm Click [OK]

The APN settings will be downloaded from the FOMA handset. Please wait.

- For a Bluetooth Connection The confirmation may be displayed depending on the FOMA handset connection settings. Press A [Accept] to connect.
- 5 Enter a connection name in the "接続名 (Connection Name)" field ◆ Select [接続 方式 (Connection Method)] ("PPP接続 (PPP Connection)"/"IP接続 (IP Connection)" ◆ Select "発信者番号通知 を行う (Show Caller ID)" ◆ Click [次へ (Next)]
 - The following half-pitch characters cannot be entered in the "接続名 (Connection Name)" field. ¥/:*?!<> | "
 - To connect to "mopera U", select "接続方式 (Connection Method)" to "IP接続 (IP Connection)".
 When using in Japan, you can select any "接続方式 (Connection Method)".
 To connect to "mopera", select "PPP接続 (PPP Connection)".
 - To connect to "mopera U" or "mopera", Caller ID must be sent. Do not select "発信者番号通知を行わない (Hide Caller ID)".
 - If using overseas, select "NW サービスに従う (Follow the NW Service)" and on the FOMA handset, operate ● ★ (Network Services) ◆ "Caller ID Notification" ◆ "Change Notification Setting" to set whether to show your Caller ID.
 - For a Bluetooth Connection Check that the name displayed under "モデム 名 (Modem Name)" is correct by referring to the instruction manual for your PC or the Bluetooth adapter connected to the PC.

かんたん設定			×
パケット通信設定			
接続名:	FOMA		
モデム名:	FOMA M702iG		_
接続方式:	○ PPP接続	● IP接続	
☞ 発信者番号通知	吃行う		
○ 発信者番号通知			
○ NWサービスに従う			
※mopera U及び、mo でご利用の場合は、「I	opera接続では発信 vWサービスに従う」を	著番号が必要で iチェックしてください	すが、海外 No
	〈 戻る(匠)	;次へ(<u>N</u>) >	キャンセル

Select any users under "使用可能ユー ザーの選択 (Select a permitted user)" and click [次へ (Next)]

To connect to "mopera U" or "mopera", the "ユー ザー名 (User Name)" and "パスワード (Password)" fields can be left unfilled.

Set "最適化を行う (Optimize)" to ▼ ◆ click [次へ (Next)]

If already optimized

A conformation to optimize does not appear. Go to Step 8.

<mark>♀</mark> Check the settings ♦ Click [完了 (Finish)]

If "デスクトップにダイヤルアップのショートカットを作成する (Create a shortcut to dial-up on the desktop)" is set to ♥, a shortcut to the dial-up connection will be created on the desktop.

To change settings

Click [戻る (Back)].

Olick [OK]

Setting completes.

If the optimization setting was changed You need to restart the PC. Click "(はい) (Yes)" on the screen to reboot.

Using Another Provider

- On the FOMA PC configuration software screen, click [かんたん設定 (Easy Settings)]
- <mark>2</mark> Select "パケット通信 (Packet Communication)" and click [次へ (Next)]
- 3 Select "その他 (Other)" and click [次へ (Next)]

🖊 Click [OK]

The APN settings will be downloaded from the FOMA handset. Please wait.

For a Bluetooth Connection

The confirmation may be displayed depending on the FOMA handset connection settings. Press $\boxed{}$ [Accept] to connect.

5 Enter a connection name in the "接続名 (Connection Name)" field

- The following half-pitch characters cannot be entered in the "接続名 (Connection Name)" field. ¥/:*?!<> | "
- Follow the instructions from your ISP to set the "接 続方式 (Connection Method)" and Caller ID notification.

For a Bluetooth Connection

Check that the name displayed under "モデム 名 (Modem Name)" is correct by referring to the instruction manual for your PC or the Bluetooth adapter connected to the PC.

To set the IP address and DNS

If your ISP requires setting IP addresses and DNS, click [詳細情報の設定 (Advanced Information Settings)] and set these items.

がんたん設定	\mathbf{X}
パケット通信設定	
接続名:	FOMA
モデム名:	FOMA M702ig
接続先(APN)の選択:	moperane.jp(PPP接続)
 発信者番号通知を 	行う 接続先(APN)設定
○ 発信者番号通知を ○ NWサービスに従う	行わない 詳細情報の設定…
〈 戻	3個 次へ(10)> キャンセル



Click [追加 (Add)] ♦ Set up the APN ♦ Click [OK]

Set "番号 (cid)" to 2 or 4-10.

Click [OK]

h

The "接続先(APN)設定 (APN Setting)" screen closes.

🧿 Click [次へ (Next)]

) Set "ユーザー名 (User Name)" and "パス ワード (Password)" ◆ Select any users under "使用可能ユーザーの選択 (Select a permitted user)" ◆ Click [次へ (Next)]

Enter the user name and password provided by your ISP accurately paying attention to upper or lower case.

3 Continued on the next page

Click [接続先(APN)設定 (APN Settings)]

】 Set "最適化を行う (Optimize)" to ▼ ト Click [次へ (Next)]

If already optimized

A conformation to optimize does not appear. Go to Step 12.

🤈 Check the settings 🕈 Click [完了 (Finish)]

If "デスクトップにダイヤルアップのショートカットを作成する (Create a shortcut to dial-up on the desktop)" is set to ▼, a shortcut to the dial-up connection will be created on the desktop.

To change settings Click [戻る(Back)].

Click [OK]

Setting completes.

If the optimization setting was changed You need to restart the PC. Click "(はい) (Yes)" on the screen to reboot.

Setting 64K Communication Using Easy Settings

64K data communication is a communication method whose charges are based on the connection time. It allows a maximum speed of 64Kbps to transfer data.

It is recommended that you use "mopera U" that handles broadband connection options or international roaming to connect to the Internet using the FOMA handset (separate subscription is required). You can perform only packet communication using international roaming. Note that packet communication fees under international roaming differ from those in Japan. If you want to connect to the Internet now, "mopera" is convenient.

This section describes the steps to set up a USB connection as an example.

Using "mopera U" or "mopera"

- On the FOMA PC configuration software screen, click [かんたん設定 (Easy Settings)]
- 2 Select "64Kデータ通信 (64K Data Communication)" and click [次へ (Next)]
- 3 Select "「mopera U」への接続 (Connect to mopera U)" or "「mopera」への接続 (Connect to mopera)" ◆ Click [次へ (Next)]

When selecting "「mopera U」への接続 (Connect to mopera U)"

A screen to confirm whether you are a subscriber to "mopera U" appears. Click [(JU) (Yes)] if you are a subscriber and continue with the settings.

4 Enter a connection name in the "接続名 (Connection Name)" field ◆ Select "発信 者番号通知を行う (Show Caller ID)" ◆ Click [次へ (Next)]

- The following half-pitch characters cannot be entered in the "接続名 (Connection Name)" field.
 ¥/:*?!<> | "
- Select "FOMA M702iG" for the "モデムの選択 (Select the modem)" field.
- To connect to "mopera U" or "mopera", Caller ID must be sent. Do not select "発信者番号通知を行わない (Hide Caller ID)".

For a Bluetooth Connection

Check that the name displayed under "モデム 名 (Modem Name)" is correct by referring to the instruction manual for your PC or the Bluetooth adapter connected to the PC.

ሙኤ	たん設定			×
	-64Kデータ通信設定			
	接続名:	FOMA		
	モデムの選択:	FOMA M702iG	•	
	☞ 発信者番号通知	2年3)		
	 死信者番号通知 			
	○ NWサービスに従う			
	※mopera U及び、mop でご利用の場合は、「Ni	ra接続では発信者番号が サービスに従う」をチェックして	必要ですが、海外 こください。	
	<	戻る(B) 次へ(N)>	キャンセル	
-				_

5 Select any users under "使用可能ユー ザーの選択 (Select a permitted user)" ♦ Click [次へ (Next)]

To connect to "mopera U" or "mopera", the "ユー ザー名 (User Name)" and "パスワード (Password)" fields can be left unfilled.

Check the settings ♦ Click [完了 (Finish)]

- If "デスクトップにダイヤルアップのショートカットを作成する (Create a shortcut to dial-up on the desktop)" is set to ♥, a shortcut to the dial-up connection will be created on the desktop.
- **To change settings** Click [戻る (Back)].

Click [OK]

Setting completes.

Using Another Provider

- On the FOMA PC configuration software screen, click [かんたん設定 (Easy Settings)]
- 2 Select "64Kデータ通信 (64K Data Communication)" ▶ Click [次へ (Next)]

Select "その他 (Other)" ♦ Click [次へ (Next)]

- When selecting "「mopera U」への接続 (Connect to mopera U)" A screen to confirm whether you are a subscriber to "mopera U" appears. Click [はい) (Yes)] if you are a subscriber and continue with the settings.
- 4 Configure the communication settings Click [次へ (Next)]
 - Perform the following to configure the communication settings:
 - Enter a connection name in the "接続名 (Connection Name)" field. The following half-pitch characters cannot be entered in the "接続名 (Connection Name)" field. ¥/: *?(<> | "
 - Select "FOMA M702iG" for the "モデムの選択 (Select the modem)" field.
 - Enter the phone number to dial your ISP in the "電話番号 (Phone Number)" field.
 - Follow the instructions of your ISP to set the "接続 方式 (Connection Method)" and Caller ID notification.
 - If using overseas, select "NW サービスに従う (Follow the NW Service)" and on the FOMA handset, operate ● ◆ இ (Network Services) ◆ "Caller ID Notification" ◆ "Change Notification Setting" to set whether to show your Caller ID.
 - For a Bluetooth Connection Check that the name displayed under "モデム 名 (Modem Name)" is correct by referring to the instruction manual for your PC or the Bluetooth adapter connected to the PC.

To set IP addresses and DNS If your ISP requires setting IP addresses and

DNS, click [詳細情報の設定 (Advanced Information Settings)] and set these items.

接続名: FOMA モデムの選択: FOMA M702/G 電話書号: D0000000000	
電話番号: 000000000000000000000000000000000000	
	-
 ・ 発信者番号通知を行う	報の設定
○ NWサービスに従う	

5 Set "ユーザー名 (User Name)" and "バス ワード (Password)" ♦ Select any users under "使用可能ユーザーの選択 (Select a permitted user)" ♦ Click [次へ (Next)]

Enter the user name and password provided by your ISP accurately paying attention to upper or lower case.

6 Check the settings ► Click [完了 (Finish)]

- If "デスクトップにダイヤルアップのショートカットを作成する (Create a shortcut to dial-up on the desktop)" is set to ♥, a shortcut to the dial-up connection will be created on the desktop.
- To change settings Click [戻る (Back)].
- Click [OK]

Setting completes.

Start Communicating

This section describes steps to start and terminate communication set up using the FOMA PC configuration software.

 Use the same FOMA handset that was connected when you set the communication settings. Using another FOMA handset requires the installation of the communication configuration file.

Double click the connection icon on the PC desktop



If a connection icon is not displayed on the desktop, perform the following steps:

For Windows XP

Click "スタート (Start)" ◆ "すべてのプログラ ム (All programs)" ◆ "アクセサリ (Accessories)" ◆ "通信 (Communication)" ◆ "ネットワーク接続 (Network connection)" ◆ Double-click the access point that has been set up

For Windows 2000

Click "スタート (Start)" ◆ "プログラム (Programs)" ◆ "アクセサリ (Accessories)" ◆ "通信 (Communication)" ◆ "ネットワークとダ イヤルアップ接続 (Network and dial-up connection)" ◆ Double-click the access point that has been set up

2 Enter "ユーザー名 (User Name)" and "パ スワード (Password)" ♦ Click [ダイヤル (Dial)]

The access point will be connected.

• To connect to "mopera U" or "mopera", the "ユーザー名 (User Name)" and "パスワード (Password)" fields can be left unfilled.

6650
ユーザー名(山):
パスワード(<u>P</u>):
 □ 次のユーザーが接続するとき使用するために、このユーザー名とパスワード 名は存するの。 ○ このユーザーのみ (1) ○ このユービーのみ (1) ○ このコービュータを使うすべてのユーザー(A)
ダイヤルΦ: 186*99***3#
ダイヤル① キャンセル ブロパティ@ ヘルブ(H)

Note

 The communication speed displayed on the PC may be different from the actual communication speed.

Disconnecting Communication

Exiting the Internet browser may not terminate the connection. Perform the following steps to terminate the connection securely.

Click the dial-up icon in the task tray of the PC



2 Click [切断 (Disconnect)]

The communication will be terminated.



W-TCP Settings

"W-TCP configuration software" is a tool to set TCP parameters in order to optimize the TCP/IP transmission capability when packet communication is performed over the FOMA network. In order to get most out of the FOMA handset communication capability, you need to optimize the communication settings using this software.

 Optimization is not necessary if you selected "最適化 を行う (Optimize)" when configuring the communication settings using "Easy Settings".

For Windows XP

You can set/cancel optimization per dial-up connection.

<Example: Optimizing>

- - To operate from the task tray of the PC Click .
- 2 On the W-TCP settings screen, click [最 適化を行う (Optimize)]
 - To cancel optimization On the W-TCP settings (dial-up) screen, click [システム設定 (System Settings)] ◆ [最適化を 解除する (Cancel Optimizing)]
 - If already optimized, the W-TCP settings screen will not open. In this case, go to Step 3.

3 Set ☑ to a dial-up connection to optimize ▶ Click [実行 (Execute)]

• Set 🔲 to a dial-up connection to cancel optimizing.

FOMAバケット通信用のダイヤルアップを選択してください。					
最適化	変更	速度	現在	ダイヤルアップ名	モデム名
口する		384Kbps	非最適化	Bluetooth	
☑する		384Kbps	最適化	FOMA	FOMA M702iG
				第行	キャンヤル

Follow the instructions on the message to reboot the PC to enable the optimization

The optimization of the system settings will become enabled after the PC reboots.

For Windows 2000

<Example: Optimizing>

Start the FOMA PC configuration software ◆ Click [W-TCP設定 (W-TCP settings)]

- To operate from the task tray of the PC Click .
- 2 On the W-TCP settings screen, click [最 適化を行う (Optimize)]

■ To cancel optimization On the W-TCP settings screen, click [最適化を

解除する (Cancel Optimization)] Follow the instructions on the message

to reboot the PC to enable the

optimization

The optimization of the system settings will become enabled after the PC reboots.

Setting APN

Set the access point (APN) for packet communication.

Up to 10 APN can be set, and a cid of 1 to 10 can be assigned.

Use a cid to specify the access point for packet communication. The default cid1 is registered "mopera.ne.jp" for APN of "mopera" and cid3 is registered "mopera.net" for APN of "mopera U", when you set cid, 2 or a number between 4 and 10.

- Check that the FOMA handset and the PC are connected properly before configuring the settings. →P5, P8
- Start the FOMA PC configuration software ♦ Click [接続先 (APN) 設定 (APN settings)]

2 Click [OK] on the Download FOMA handset settings screen

The information on the APN that has been accessed and registered by the connected FOMA handset will be read.

Configure APN

 To set the connection method, click [編集 (Edit)] ◆ [詳細設定 (Advanced Settings)] and select a connection method.

Editing/Deleting/Adding an APN

- To edit a registered APN Select an APN from the list ◆ Click [編集 (Edit)]
- To delete a registered APN

Select APN from the list > Click [削除 (Delete)]

- APN's registered for cid 1 and cid 3 cannot be deleted (Even if you select number (cid) 1 or 3 and click [削除 (Delete)], it will not be deleted, and number (cid) 1 reverts to "mopera.ne.jp" and 3 reverts to "mopera.net").
- To add an APN

Click [追加 (Add)]

Saving to a File

You can make a backup of saved APN settings on the FOMA handset or save APN settings that are being edited.

Click "ファイル (File)" ♦ "名前を付けて保 存 (Save as)" or "上書き保存 (Save)"

Reading from a File

You can re-edit the APN settings saved on the PC or write the settings to the FOMA handset.

Click "ファイル (File)" ▶ "開く (Open)"

Writing APN Information to the FOMA Handset

You can write the APN settings that have been written to the FOMA handset, to the FOMA handset.

Click [FOMA端末へ設定を書き込む (Write settings to FOMA handset)]

The confirmation to overwrite appears.

Click [はい (Yes)]

Reading APN Information from the FOMA Handset

You can read the registered APN from the FOMA handset on demand.

Click "ファイル (file)" ▶ "FOMA端末から 設定を取得 (Download settings from FOMA handset)"

The Download FOMA handset setting screen is displayed.

2 Click [OK]

Creating a Dial-up Connection

Write the added or edited APN to the FOMA handset and set up a dial-up connection.

Select the added or edited APN ♦ Click [ダイヤルアップ作成 (Create a dial-up connection)]

A confirmation to write to the FOMA handset appears.

) Click [はい (Yes)]

After the APN information was written to the FOMA handset, clicking [OK] opens the "パケット 通信用ダイヤルアップの作成 (Create a dial-up connection for packet communication)" screen.

3 Enter a connection name ▶ Click [アカウ ント・パスワードの設定 (Account/ password setting)]

• For "mopera U" or "mopera", the fields can be left unfilled.

4 Set "ユーザー (User)" and "パスワード (Password)" ♦ Select any users under "使用可能ユーザーの選択 (Select a permitted user)" ♦ Click [OK]

A dial-up connection is created.

 If your ISP provided IP and DNS information, click [(Set detailed information)] on the Dial-up for packet communication creation screen, entered any necessary information, and click [OK].

Note

- APN information is saved on the FOMA handset. If you connect a different FOMA handset, save the APN information again.
- If you want to use the APN information saved on the PC, register the same APN to the same cid on the FOMA handset.

Uninstalling the FOMA PC Configuration Software

- Be sure to uninstall the FOMA PC configuration software from a user account with the administrator privileges. For settings and operations regarding PC administrator privileges, contact your PC manufacturer or Microsoft Inc.
- <Example: For Windows XP>

Terminate any running software

- ① Terminate "W-TCP設定ソフト (W-TCP configuration software)" Right click [1] in the task tray of the PC and click "終了 (Exit)".
- ② Exit the FOMA PC Configuration Software Click [終了 (Exit)] at the lower right corner of the screen.
- ③ Terminate any running software
- 2 Click [スタート (Start)] ▶ [コントロールパ ネル (Control Panel)] ▶ [プログラムの追 加と削除 (Add or Remove Programs)]

■ For Windows 2000 Click [スタート (Start)] ◆ [設定 (Settings)] ◆ [コントロールパネル (Control Panel)] ◆ [アプ

リケーションの追加と削除 (Add or Remove Applications)]

Select "NTT DoCoMo FOMA PC設定ソフト (NTT DoCoMo FOMA PC configuration Software)" ◆ Click [削除 (Delete)]

■ For Windows 2000 Select "NTT DoCoMo FOMA PC設定ソフト (NTT DoCoMo FOMA PC configuration Software)" ◆ Click "変更/削除 (Change / Delete)"

イ Check the program name to remove and click [はい (Yes)]

Click [完了(Finish)]

The un-installation of the FOMA PC configuration software completes.

If W-TCP settings have been optimized The following screen is displayed. If you do not intend to perform data communication by connecting the FOMA handset, click [[はい (Yes)] to cancel optimization.

最適化の解除

現在、FOMAIやかり用こ最適化されています。 アンインストール実践行する前に最適化を解除しますか? (はい):最適には解除し、パアンイクストールを実行します。(パワエ)の再起動が必要です) いた!:最適比OM解除を行むす、アンイストールを実行します。 (はい位) (いたなし) キャンセル。

Configuring a Dial-up Network

This section describes the steps to configure settings for packet communication or 64K data communication without using the FOMA PC configuration software. Because there are many common steps to set up packet communication and 64K data communication, this section describes how to set up the connection for packet communication. The steps to set up 64K data communication, different steps, and cautions are described on Page 25.

Setting APN

Set the access point (APN) for packet communication. Up to 10 APN's can be set up and they are managed with cid's. Communication software requires setting up an APN in order to enter AT commands. This section describes the steps necessary for using "Hyper Terminal" that comes with Windows.

- To set up a 64K data communication connection, or to use "mopera U" or "mopera" as an access point for packet communication, these settings are not required.
- For APN's other than "mopoera U" or "mopera", contact your ISP.

<Example: Setting up a USB connection in Windows XP>

Connect the FOMA handset and the PC

- Connecting →P5
- For a Bluetooth Connection
 - Connecting →P7

2 Click "スタート (Start)" ◆ "すべてのプロ グラム (All programs)" ◆ "アクセサリ (Accessories)" ◆ "通信 (Communication)" ◆ "ハイパーターミナ

ル (Hyper Terminal)"

Hyper Terminal launches.

For Windows 2000

Click "スタート (Start)" ◆ "プログラム (Programs)" ◆ "アクセサリ (Accessories)" ◆ "通信 (Communication)" ◆ "ハイパーターミナ ル (Hyper Terminal)"

Enter a connection name in the "名前 (Name)" field ▶ Click [OK]



- 4 Enter a non-existing phone number (such as "0") in the "電話番号 (Phone Number)" field ◆ Check that "FOMA M702iG " is displayed for "接続方法 (Connection Method)" ◆ Click [OK]
 - If there are similar modem names displayed in the "接続方法 (Connection Method)" field, check the FOMA handset modem name. →P8

For a Bluetooth Connection

Set "接続方法 (Connection Method)" to the modem name verified in "Checking the Modem" (P8).

, 接続の設定	?×
SAMPLE 🗞	
電話番号の情報を	入力してください。
国/地域番号(<u>C</u>):	日本 (81)
市外局番(E):	03
電話番号(<u>P)</u> :	0
接続方法(<u>N</u>):	FOMA M702iG
	OK キャンセル

5 Click [キャンセル (Cancel)] on the Connection screen

The Hyper Terminal entry screen opens.

6 Enter the APN in the following format ♦ Press ↓

[Entry Format]

AT+CGDCONT=<cid>,"<PDP type>","<APN>" <cid>: Enter the registration number (cid) of the access point (APN). Cid1 is registered "mopera.ne.jp" and cid3 is registered "mopera.net" already, when you set cid, 2 or a number between 4 and 10.

<PDP type>: Enter the PDP type of the APN in PPP or IP.

<APN>: Enter the access point (APN). [OK] appears after the access point is set up.

• Enter ATE1 [] if the entered characters are not displayed.

7×1.4 ② 編集回 表示② 通信② 転送回 へんだい	
D # = \$ = 0 B B	
AT+CGDCONT=2, "IP", "XKX.abc"	
0K	
HE 00137 前前的出 460800 8-N-1 SCROLL CAPS NUM 中中 113-160	

To reset the APN settings of the specified cid

Enter AT+CGDCONT=<cid>.

To view the registered APN Enter AT+CGDCONT? .

Click "ファイル (File)" ◆ "ハイパーターミ ナルの終了 (Exit Hyper Terminal)"

Click [はい (Yes)] on the conformation to disconnect screen ♦ Click [いいえ (No)] on the confirmation to save screen

Hyper Terminal exits and the APN settings complete.

Note

- APN information is saved on the FOMA handset. If you connect a different FOMA handset, save the APN information again.
- If you want to use the APN information saved on the PC, register the same APN to the same cid on the FOMA handset.

Setting Display/Hide Caller ID

You can set to display or hide Caller ID for packet communication using the *DGPIR AT command.

• To set up 64K data communication connection, this setting is not required.

Perform Step 1 to 5 in "Setting APN"

Hyper Terminal launches and the entry screen opens.

2 Set whether to display or hide Caller ID using the following format ♦ Press ↓

[Entry Format]

AT*DGPIR=<n>

<n> : Set to 1 to hide Caller ID ("184" is added when dialing).

Set to 2 to display Caller ID ("186" is added when dialing).

[OK] appears after Caller ID notification is set.

- To use "mopera U" or "mopera", set to 2 (display Caller ID).
- Enter ATE1 [] if the entered characters are not displayed.

Note

- You can also enter the leading "184" or "186" to the phone number of an APN for a dial-up connection to display or hide the Caller ID. →P20, P22
 If you set Caller ID notification using the *DGPIR command and the dial-up connection setting, the dial-up connection setting takes precedence.
 For example, even if you set <n> of the *DGPIR command to 2, entering the leading "184" (hide) to the APN number in the dial-up network hides the Caller ID.
- When using overseas, set AT*DGPIR=0 (Default). Calls will be made according to the registered APN.

Configuring Dial-up Network Settings

Set up the dial-up network on the PC. This section describes the steps to connect to "mopera U" that has been set to <cid>=3 in the USB connection as an example.

 For setting up connections to other than "mopoera U" or "mopera", contact your ISP.

For Windows XP

- Click "スタート (Start)" ◆ "すべてのプロ グラム (All Programs)" ◆ "アクセサリ (Accessories)" ◆ "通信 (Communication)" ◆ "新しい接続ウィ ザード (New Connection Wizard)"
- 20 Continued on the next page •••

- 2 On the New connection wizard screen, click [次へ (Next)]
- 3 Select "インターネットに接続する (Connect to the Internet)" ▶ Click [次へ (Next)]
- 4 Select "接続を手動でセットアップする (Set up the connection manually)" ▶ Click [次へ (Next)]
- 5 Select "ダイヤルアップモデムを使用して 接続する (Use a dial-up modem to connect)" ▶ Click [次へ (Next)]
- If the "デバイスの選択 (Select a device)" screen opens, select "Modem - FOMA M702iG" ◆ Click [次へ (Next)]

The "デバイスの選択 (Select a device)" screen opens only when there is more than one modem.

For a Bluetooth Connection Select the modem you checked in "Checking the Modem" (P8).

Enter a name in the "ISP名 (ISP Name)" field ▶ Click [次へ (Next)]

iしい 接続ウィザード	
接続名 インターネット接続を提供するサービスの名前は何で	atter
次のボックスに ISP の名前を入力してください。	
ISP 名(A)	
SAMPLE	
ここに入力された名前は作成している接続の名前に方	\$74.79
	〈 戻る(日) 〉 次へ(日 〉 「 キャンセル

8 Enter the APN phone number in the "電 話番号 (Phone Number)" field ▶ Click [次 へ (Next)]

• When you connect "mopera U", enter "*99***3#" to the access point number.

新しい 接続ウィザード	
ダイヤルする電話番号 ISP の電話番号を指定してください。	Ŋ
下に電話番号を入力して代だい。 電話番号 (9) *99**33 第31番号表生は市外局番/小公園21場合が表 号にダイヤルして代だれ、モデムの音が聞こえ	ります。よくからないときは、電話でその電話番 登場合はダイヤルしたその番号が主角です。
	(原3個) 次へ切) キャンセル

Enter "ユーザー名 (User Name)", "パス ワード (Password)", and "パスワードの確 認入力 (Confirm password)" ▶ Click [次 へ (Next)]

Enter the fields according to the information provided by your ISP.

For "mopera U" or "mopera", the fields can be left unfilled.

新しい 接続ウィザード	
インターネット アカウント情報 インターネット アカウントにサインインペ	するにはアカウント名とバスワードが必要です。
ISP アカウント名およびパスワードを のアカウント名またはパスワードを忘	入力し、この情報を書き留めてから安全な場所に保管してください。(既存 れてしまった場合は、ISP に同い合わせてください。)
2-4-8W	
バスワード(<u>P</u>):	
パスワードの確認入力(②):	
ビ このコンピュータからインターネット する(S)	トに接続するときは、だれでもこのアカウント名およびパスワードを使用
● この接続を既定のインターネット	接続とする(M)
▽この接続のインターネット接続フ	ァイアウォールをオンにする①
	〈 戻る(但) 〉 次へ(性) 〉 キャンセル

በ Click [完了 (Finish)]

The new connection wizard appears.

- Click "スタート (Start)" ◆ "すべてのプロ グラム (All programs)" ◆ "アクセサリ (Accessories)" ◆ "通信 (Communication)" ◆ "ネットワーク接続 (Network connection)"
- 12 Select the icon of the created dial-up connection ♦ Click "この接続の設定を変 更する (Change the setting of this connection)"



3 Check the settings on the "全般 (General)" tab screen

- If two or more models are connected to the PC, set only "Modem -FOMA M702iG" to ☑ in the "接続方 法 (Connection Method)" field.
- Set "ダイヤル情報を使う (Use dialing information)" to
 I





4 Click the "ネットワーク (Network)" tab ♦ Set as the example on the screen

- Select "PPP:Windows 95/98/NT4/2000,Internet" in the "呼び出すダイヤルアップサーバーの種類 (Dial-up server type to call)".
- Set "インターネットプロトコル (Internet Protocol) (TCP/IP)" to ☑ in the "この接続は次の項目を使用 します (This connection uses the following items)" field. You cannot change the settings of "Qosパ ケットスケジューラ (QoS Packet Scheduler)".



5 Click [設定 (Settings)]





7 On the "ネットワーク (Network)" tab screen, click [OK]

For Windows 2000

- Click "スタート (Start)" ◆ "プログラム (Programs)" ◆ "アクセサリ (Accessories)" ◆ "通信 (Communication)" ◆ "ネットワークとダ イヤルアップ接続 (Network and dial-up connection)"
- 2 On the Network and Dial-up connection screen, double-click the "新しい接続の作 成 (Create new connection)" icon.
- If the location information screen opens, enter "市外局番 (City code)" ◆ Click [OK] This appears only when "新しい接続の作成 (Create new connection)" is launched for the first time. Go to Step 5 when launching this for the second time or later.
- On the phone and modem option screen, Click [OK]
- 5 On the Network connection wizard screen, Click [次へ (Next)]
- Select "インターネットにダイヤルアップ 接続する (Connect to the Internet via dialup)" ▶ Click [次へ (Next)]
 - Select "インターネット接続を手動で設定 するか、またはローカルエリアネットワー ク(LAN)を使って接続します (Set up the Internet connection manually, or connect using LAN)" ◆ Click [次へ (Next)]
- Select "電話回線とモデムを使ってイン ターネットに接続します (Connect to the Internet using a phone line and modem)"
 ▶ Click [次へ (Next)]
- 9 If the modem selection screen opens, select "FOMA M702iG" ▶ Click [次へ (Next)]
 - This screen may not open depending on the operating environment of your PC. Go to Step 10 if this screen does not open.
 - For a Bluetooth Connection Select the modem you checked in "Checking the Modem" (P8).


● Enter the APN phone number in the "電話番号 (Phone Number)" field ◆ Click [詳細設定 (Advanced settings)]

- When you connect "mopera U", enter "*99***3#" to the access point number.
- Set "市外局番とダイヤル情報を使う (Use city code and dialing information)" to □.



Set the "接続 (Connection)" tab screen according to the example on the screen

 If you are connecting to other than "mopera U" or "mopera", configure "接続の種類 (Connection type)" and "ログオンの手続き (Log on procedures)" according to the settings provided by your ISP.



2 Click the "アドレス (Address)" tab configure settings according to the examples on the screen ◆ Click [OK]

 If you are connecting to other than "mopera U" or "mopera", configure "IPアドレス (IP address)" and ISPによるDNS (ドメインネームサービス) アド レスの自動割り当て (Assign DNS address automatically by ISP)" according to the settings provided by your ISP.

IP アドレス				
	トサービスプロバイタ	による自動割	り当て(<u>P)</u>	
 常に使用す IP アドレス 				_
	Ψ. I.			
TOD (THE DWG	(k) (X) (A = 1 + -	אר ואק (רא	白動動の出て	
	(ドメイン ネーム サー DNS (ドメイン ネー/			当て(1)
	DNS(ドメイン ネーム			当て心
○ ISP による ○ 常に使用す	DNS(ドメイン ネーム			¥TW
○ ISP による ○ 常に使用す ブライマリ (DNS (ドメイン ネーム な設定(E):			≝TW

3 On the "インターネットアカウントの接続 情報 (Internet account connection information)" screen, click [次へ (Next)]

4 Enter "ユーザー名 (User Name)" and "パ スワード (Password)" ▶ Click [次へ

(Next)]

Enter the fields according to the information provided by your ISP.

For "mopera U" or "mopera", the fields can be left unfilled.

If they are not filled, screens warning that the user name and password fields are not filled open one after another. Click [$|J \cup \rangle$ (Yes)] on each screen.



- 5 Enter a connection name in the "接続名 (Connection Name)" field ◆ Click [次へ (Next)]
- 🖌 Select "いいえ (No)" 🕨 Click [次へ (Next)]

<mark>|7</mark> Click [完了 (Finish)]

- If "今すぐインターネットに接続するにはここを選び完了をクリックしてください (Select this to connect to the Internet now and click Finish)" appears, set the option to □.
- 8 Select the icon of the created dial-up connection ♦ Click "ファイル (File)" ♦ "プロパティ (Properties)"



Check the settings on the "全般 (General)" tab screen

- If two or more models are connected to the PC, set only "Modem -FOMA M702iG" to ☑ in the "接続方 法 (Connection Method)" field.
- Set "ダイヤル情報を使う (Use dialing information)" to 🗖.



?∩ Click the "ネットワーク (Network)" tab 🕨 Set as the example on the screen

- Select "PPP:Windows 95/98/NT4/2000,Internet" in the "呼び出すダイヤルアップサーバーの種類 (Dial-up server type to call)".
- Set only "インターネットプロトコル (Internet protocol) (TCP/IP)" to ▼ in the "チェックボックス がオンになっているコンポーネントはこの接続で 使われます (Checked components are used for this connection)" field.



Set all items to T + Click [OK	(]
PPP の設定	? ×
 □ LCP 拡張を使う(£) □ ソフトウェアによる圧縮を行う(½) □ 単一リンク接続に対してマルチリンクをネゴシェートする(<u>M)</u>
ОК	キャンセル

On the "ネットワーク (Network)" tab 72 screen, click [OK]

Communicating

This section describes steps to start and terminate communication set up without using the FOMA PC configuration software.

· Use the same FOMA handset that was connected when you set up the communication. Using another FOMA handset requires re-installation of the communication configuration file.

<Example: For Windows XP>

Click "スタート (Start)" ▶ "すべてのプロ グラム (All programs)" 🕈 "アクセサリ (Accessories)" ▶ "通信 (Communication)" ◆ "ネットワーク接続 (Network connection)" Double-click the access point that has been set up For Windows 2000 Click "スタート (Start)" ▶ "プログラム (Programs)" ◆ "アクセサリ (Accessories)" ◆ "通信 (Communication)" ◆ "ネットワークとダ イヤルアップ接続 (Network and dial-up

connection)" Double-click the access point that has been set up

Enter "ユーザー名 (User Name)" and "パ スワード (Password)" ♦ Click [ダイヤル (Dial)]

The access point will be connected.

• To connect to "mopera U" or "mopera", the "ユーザー名 (User Name)" and "パスワード (Password)" fields can be left unfilled.

SAMPLEへ接続	ź		?×
C		2	X
ユーザー名(山):			
パスワード(<u>P</u>):			
●このユー!			ーザー名とパスワード
ダイヤルΦ:	*99***3#		~
<u>\$1710</u>) (**>\UII) (ליםול (סי	

Note

 The communication speed displayed on the PC may be different from the actual communication speed.

Disconnecting Communication

Exiting the Internet browser may not terminate the connection. Perform the following steps to terminate the connection securely.

Click the dial-up icon in the task tray of the PC



) Click [切断 (Disconnect)]

The communication will be terminated.

全般 詳細		
接続		
状態:		接続
維続時間		00:00:31
速度		460.8 Kbps
動作状況		
	ita — 💦) 受信
137 k	2,522	2,680
圧縮	0 %	0.90
I5-:	0	0
70//ティ(P)	切断(0)	

64K Data communication settings

This section describes precautions and different steps from the packet communication settings when 64K data communication connection is set up without using the FOMA PC configuration software.

64K Data communication dial-up connection and TCP/IP settings

The settings are the same as for packet communication (P19), however, note the following:

- The APN is not required to set up for 64K data communication. Enter the phone number of the access point provided by your ISP for the dial-up connection destination (enter "*8701" to connect to "mopera U", and enter "*9601" to connect to "mopera").
- Configure "発信者番号通知/非通知の設定 (Caller ID notification)" and settings using AT commands of your own choice (Caller ID must be displayed to connect to "mopera U").
- For detailed information on settings, contact your ISP.

Connecting/Disconnecting

Use the same operations as for packet communication. Perform the operations on P25.


AT Commands

AT commands are used to check the FOMA handset function settings or status using a PC. Usually the communication software issues AT commands so that you do not have to be concerned about them. Use AT commands if you want to control the FOMA handset in your own way.

Format of AT Commands

AT commands should be input on the Terminal Mode screen of the communication software. Use only single-byte alphanumeric characters.

<Example of Entry Format>



 An AT command must be entered on a single line including parameters (numbers and symbols) following the command. On the Terminal Mode screen of the communication software, one line is from the first character to the previous character of [.].

Note

 In the Terminal mode, a PC functions as if it were a communication terminal. Characters entered from the keyboard are sent to a line connected to a communication port.

Switching between On-line Data Mode and On-line Command Mode

The following two methods are available to switch between on-line data mode and on-line command mode on the FOMA handset:

- Enter the "+++" command or the code set to the "S2" register.
- When "AT&D1" is set, set the ER signal of the serial (COM) port to OFF.
- The packet communication is available to switch to on-line command mode.

Enter "ATO]" to switch from the on-line command mode to the on-line data mode.

Saving the Settings

Settings by AT commands are initialized when the FOMA handset power is turned off and back on except: APN settings set by the AT+CGDCONT command, QoS settings by AT+CGEQMIN/ AT+CGEQREQ command, setting to show or hide the packet communication number by AT* DGPIR command, and settings to restrict notifying the Caller ID by AT+CLIR command.

AT Command List

The following AT commands can be used on the "FOMA M702iG" modem port.

- [&F] : A command to initialize settings used as AT&F command.
- [?] [=?] : The current settings appear when adding "?" at the end of the command, and the effective range of the current settings appear when adding "=?" at the end of the command.

AT Command	Overview	Parameters/Description	Command Examples
AT¥S	Display the setting contents of set commands and S registers.	_	AT¥S E1 Q0 V1 X4 &C1 &D2 &S0 &E1 ¥V0 S000=000 S002=043 S003=013 S004=010 S005=008 S006=005 S007=060 S008=003 S010=001 OK
AT¥V <n> [&F]</n>	Select whether to use the extended result code at connection.	n=0 (default) : The extended result code is not used. n=1 : The extended result code is used.	AT¥V0 OK
AT%V	Display the version of the FOMA handset.	_	AT%V XXXX OK
AT&C <n> [&F]</n>	Set the operating conditions of the circuit CD for DTE.	n=0 : Always keeps line CD signal ON. n=1 (default) : CD changes depending on the other party's modem status.	AT&C1 OK
AT&D <n></n>	Set the operation performed when circuit ER signal received from DTE is switched from ON to OFF.	n=0 : Ignore ER signals (Always regard as ON) n=1 : On-line command mode starts when ER signals change from ON to OFF. n=2 (default) : Off-line mode starts when ER signals change from ON to OFF.	AT&D1 OK

AT Command	Overview	Parameters/Description	Command Examples
AT&E <n> [&F]</n>	Select the specification to show the connection speed.	n=0 : Show the communication speed for wireless segment. n=1 (default) : Show the communication speed between the PC and FOMA handset.	AT&E0 OK
AT&F <n></n>	Reset the FOMA handset AT command set values to factory defaults. If executed during a communication, the line is disconnected.	Only n=0 can be set (skippable)	AT&F OK
AT&S <n> [&F]</n>	Set the control of DR (data set ready) signals output by the FOMA handset.	n=0 (default) : Set DR signals always to ON. n=1 : Set DR signals to ON when the line is connected.	AT&S0 OK
AT * DANTE	Displays the number of antennas of signal strength. (0 to 5)	If you execute "AT*DANTE", it will be displayed in the form of "*DANTE: <n>". n=0: Out of the service area of the FOMA handset n=1: 1 antenna bar of the FOMA handset n=2: 2 antenna bars of the FOMA handset n=3: 3 antenna bars of the FOMA handset n=4: 4 antenna bars of the FOMA handset n=5: 5 antenna bars of the FOMA handset</n>	AT * DANTE * DANTE: 5 OK
AT * DGPIR= <n></n>	The setting of this command becomes valid when a call for packet communication is dialed. 184/186 can also be added to the APN number even for the setting of a dial-up network.	n=0 (default) : Use APN as it is. n=1 : Add "184" to APN (always hide). n=2 : Add "186" to APN (always show).	AT * DGPIR=0 OK
AT * DRPW [=?]	Show an indicator of the received radio signal power at the FOMA handset. (0 : lowest - 75 : highest value)	_	AT * DRPW * DRPW : 0 OK
+++	Switch the FOMA handset from the on-line data mode to on-line command mode.	This command is not applicable to the connection using packet communication.	(Online Data Mode) +++ (Unable to see the display) OK
AT+CACM= <passwd></passwd>	Reset the cumulative billing value recorded on the UIM.	If the password meets with this command, it resets the cumulative billing value recorded on the UIM. Passwd=PIN2 code * This is a string parameter, and should be put in "" when entered.	AT+CACM="0123" OK

AT Command	Overview	Parameters/Description	Command Examples
AT+CAOC= <mode> [?] [=?]</mode>	Inquire the current billing value.	mode=0 : Check the current billing value for the calls. Execute AT+CAOC or AT+CAOC=0 to display the current billing value in the form of +CAOC:" <ccm>". ccm: billing information</ccm>	AT+CAOC +CAOC:"00001E" OK
AT+CBC	Display the battery level.	Executing "AT+CBC" displays in the format of "+CBC: <m>,<n>". m=0 : Indicate electricity is supplied from the battery pack to the FOMA handset. n=0 to 100 : Indicate the battery level in percent.</n></m>	AT+CBC +CBC : 0,60 OK
AT+CBST [&F] [?] [=?]	Set the bearer (communication type) service.	AT+CBST= <speed>, <name>,<ce> speed=116 : 64K data communication name=1 : Default of 64K data communication (synchronous) ce=0: Default of 64K data communication (transparent)</ce></name></speed>	AT+CBST=11 6, 1, 0 OK
AT+CEER	Display the reason for disconnection of the previous connection.	"Reasons for Disconnection" →P38	AT+CEER +CEER : 36 OK
AT+CGDCONT [?] [=?]	Set APN when sending Packet communication.	→P37	→P37
AT+CGEQMIN [?] [=?]	Save the judgment criteria whether to permit the QoS (Service Quality) sent by the network when packet communication is established via PPP connection.	AT+CGEQMIN= [Parameters] →P37	→P37
AT+CGEQREQ [?] [=?]	Set the QoS (Service Quality) requested to the network when packet communication via PPP connection is dialed.	AT+CGEQREQ= [Parameters] →P37	→P37
AT+CGMR	Display the version of the FOMA handset.	_	AT+CGMR 1234512345 123456 OK

AT Command	Overview	Parameters/Description	Command Examples
AT+CGREG= <n> [&F] [?] [=?]</n>	Set whether to be notified of the network registration status.	n=0 (default) : Do not notify. n=1 : Notify when outside and inside the service area is changed. Execute "AT+CGREG?" then appears as "+CGREG : <n>,<start>". n : Setting value. start=0 : Outside the packet service area. start=1 : Inside the packet service area. start=5 : Inside the packet service area (while roaming).</start></n>	AT+CGREG=1 OK
AT+CGSN	Display the serial number of the FOMA handset.	_	AT+CGSN 1234567890 12345 OK
AT+CLIP= <n> [&F] [?] [=?]</n>	Set whether to display the caller's phone number when the caller sends Caller ID.	 n=0 (default) Not send the result. send the result. When executing "AT+CLIP?", the result is displayed in the form of "+CLIP : <n><m>".</m></n> m=0 : Network setting not to send the number to the other party when calling m=1 : Network setting to send the number to the other party when calling 	AT+CLIP=0 OK AT+CLIP? CLIP=0,1 OK
AT+CLIR= <n></n>	Set whether to send the Caller ID when making 64K data communication/video calls.	 n=0 : In accord with the CLIR service subscription. n=1 : Do not send. (default) n=2 : Send. When "AT+CLIR?" is executed appear in the format of "+CLIR : <n>,<m>".</m></n> n: Setting value. m=0: CLIR is not running. (Always send). m=1: CLIR is running. (Always hide). m=2: Unknown. m=3: CLIR temporary mode (Default for hide). m=4: CLIR temporary mode (Default for show). 	AT+CLIR=0 OK

AT Command	Overview	Parameters/Description	Command Examples
AT+CMEE= <n> [&F] [?] [=?]</n>	Set the error report format of the FOMA handset.	 n=0 (default) Display "ERROR". n=1 : Display in the format of +CMEE ERROR : xxxx" (where xxxx are numbers). n=2 : Display in the format of +CMEE ERROR : xxxx" (where xxxx are text). 	AT+CMEE=0 OK
AT+CNUM	Display the own number of the FOMA handset.	Executing "AT+CNUM" displays in the format of "+CNUM :, <number>, <type>,, <service>" number : Phone number type=129 : Excluding the international access code+ type=145 : Including the international access code+ service=4 : Sound service=5 : FAX</service></type></number>	AT+CNUM +CNUM;, "+8190XXXXXXX", 145,, 4 OK
AT+COPS=[<mod e>[,<format>[,<ope r>]]]</ope </format></mod 	Select and set carrier's name/ Plmn Number. This command is used to unlock the locked UIM.	mode=0 : PImn Number is auto selected. mode=1 : PImn Number is set as specified value for <oper>. mode=3 : Setting only <format>. mode=4 : PImn Number is set as specified value for <oper>. If <oper> which you set is not a correct one, it is set to auto select. format=0 : Display carrier's name in 16 half- pitch characters in <oper>. format=2 : Display PImn Number in numerics in <oper>.</oper></oper></oper></oper></format></oper>	AT+COPS=0 OK AT+COPS? +COPS:0,0,"NTT DoCoMo" OK AT+COPS=? +COPS:(2,"NTT DoCoMo",,"44F001"),, (0,1,3,4),(0,2) OK
[?] [=?]		oper : Display carrier's name/Plmn Number	

AT Command	Overview	Parameters/Description	Command Examples
AT+CPAS [=?]	Display FOMA handset state.	Executing "AT+CPAS" displays in the format of "+CPAS : <n>". n=0 : Available to set AT commands. n=1 : Unavailable to set AT commands. n=2 : Unknown (Response to AT commands is not guaranteed). n=3 : Available to set AT commands even during incoming. n=4 : Available to set AT commands even during a call.</n>	AT+CPAS +CPAS : 0 OK AT+CPAS=? +CPAS : (0-4) OK
AT+CPIN="pin"/ AT+CPIN="puk", "pin"	Command to enter the PIN1 code or PUK code for UIM.	Enter the SIM PIN for "pin" and the PUK for "puk". Execute "AT+CPIN?" then "+CPIN : <n>" is displayed. n=READY : Authenticated. n=SIM PIN : Waiting for input. n=SIM PUK : Waiting for PUK code entry.</n>	(+CPIN : SIM PIN status) AT+CPIN="1234" OK (+CPIN : SIM PUK status) AT+CPIN="12345678", "1234" OK
AT+CPUC [=?]	Overwrite the currency table registered in the UIM.	AT+CPUC= <currency>,<pp u>[,<passwd>] Currency: Currency ppu: Packet piece unit Passwd: PIN2 code * This is a string parameter, and should be put in "" when entered.</passwd></pp </currency>	AT+CPUC="YEN","0.2", "0000" OK AT+CPUC? +CPUC : "YEN","0.2" OK
AT+CR= <n> [&F] [?] [=?]</n>	Set whether to display the bearer (communication type) before "CONNECT" is displayed when 64K data communication is connected.	n=0 (default) : Hide. n=1 : Display in the format of "+CR : <serv>". serv=GPRS : Packet communication. serv=SYNC : 64K data communication.</serv>	AT+CR=1 OK ATD * 99 * * * 1# +CR : GPRS CONNECT
AT+CRC= <n> [&F] [?] [=?]</n>	Set to use extend result code for incoming connection.	n=0 (default) : Not to use +CRING. n=1 : Use +CRING: <type>.</type>	AT+CRC=0 OK

AT Command	Overview	Parameters/Description	Command Examples
AT+CREG= <n> [&F] [?] [=?]</n>	Set whether to show Out of service area or in the service area.	n=0 (default) : Hide n=1 : Show Enter "AT+CREG?" then it is shown in the format of "+CERG : <n>, <stat>" n: Setting value. stat=0 :Out of the service area of 64K data. communication/ video calls stat=1 :Inside of the service area of 64K data. communication/ video calls stat=4 :Unknown. stat=5 :Inside of the service area of 64K data communication/ video calls (while roaming).</stat></n>	AT+CREG=1 OK
AT+CUSD=[<n>[, <str>[,<dcs>]]] [&F] [?] [=?]</dcs></str></n>	Change the settings of the network, concerned with the additional services and the like.	n=0 (default) : Answer OK without answering interim result. n=1 : Answer interim result. str : Service code For details, refer to "ご利用ガイドブック (ネットワークサービ ス編)(Mobile Phone User's Guide [Network services])". dcs=0 : Fixed value	AT+CUSD=0,"xxxxxx" OK
AT+FCLASS= <n> [&F] [?] [=?]</n>	Perform mode setting.	n=0 (default) : data	AT+FCLASS=0 OK
AT+GCAP	Display the capability list of the FOMA terminal.	_	AT+GCAP +GCAP: +CGSM, +FCLASS, +W OK
AT+GMI	Display the manufacturer of the FOMA handset.	_	AT+GMI Motorola CE, Copyright 2006 OK
AT+GMM	Display the name of the FOMA handset.	_	AT+GMM FOMA M702iG OK
AT+GMR	Display FOMA handset's version.	_	AT+GMR XXXX OK

AT Command	Overview	Parameters/Description	Command Examples
AT+IFC= <n>, <m> [&F] [?] [=?]</m></n>	Set the local flow control method between the PC and the FOMA handset.	n : DCE by DTE control n=0 : No flow control. n=1 : XON/XOFF control. n=2 (default) : RS/CS (RTS/CTS) flow control. m=0: No flow control. m=1 : XON/XOFF control. m=2 (default) : RS/CS (RTS/CTS) flow control.	AT+IFC=2,2 OK
AT+WS46 [&F] [?]	Display the network settings of the FOMA handset.	12 : GSM 22 : 3G (WCDMA) 25 : Auto switch (default)	AT+WS46? 25 OK
ΑΤΑ	The FOMA handset processes the incoming according to the receiving mode.	_	RING ATA CONNECT
A/	Retry a command just before performing.	Joes not have to be entered.	A/ OK
ATD	Start packet communication or 64K data communication.	Packet communication : ATD * 99 * * * <cid>#<cid> 1 to 10: +CGDCONT 64K data communication : ATD <phone number=""></phone></cid></cid>	Packet communication : ATD * 99 * * * 1# CONNECT 64K data communication : ATD XXXXXXXXX CONNECT
ATE <n> [&F]</n>	Set whether to echo back the text sent from a PC.	n=0 : Not to echo back. n=1 (default) : Echo back.	ATE1 OK
ATH <n></n>	Disconnect 64K data communication.	n=0 : Disconnect line (can be skipped).	(In communication) +++ ATH OK
ATI <n></n>	Display the confirmation code.	 n=0 : Display "NTT DoCoMo". n=1 : Display the name of the FOMA handset (same as +GMN). n=2 : Display the FOMA handset version (same as +GMR). n=3 : Display "OK". n=4 : Display the details of communication functions of the FOMA handset. 	ATIO NTT DoCoMo OK
ATO	Switch from On-line command mode to Off-line command mode during communication.	-	ATO CONNECT
ATQ <n> [&F]</n>	Set whether to display the result code on a PC.	n=0 (default) : Show result codes. n=1 : Hide result codes.	ATQ0 OK ATQ1 (OK is not displayed)

AT Command	Overview	Parameters/Description	Command Examples
ATS0= <n> [&F] [?]</n>	Set number of rings until FOMA handset receives connection automatically.	n=0 (default) : No auto receive is performed. n=1 to 255 : Number of rings.	ATS0=0 OK
ATS2= <n></n>	Set the escape character.	Only n=43 (default) can be specified.	ATS2=43 OK ATS2=043 OK
[&F] [?]			ATS2? 043 OK
ATS3= <n> [&F] [?]</n>	Set the return character (CR) to recognize the end of AT command text string.	Only n=13 (default) can be specified.	ATS3=13 OK
ATS4= <n> [&F] [?]</n>	Set the line feed character. It is positioned next to the return character (CR) if displaying the result code in alphanumeric characters.	Only n=10 (default) can be specified.	ATS4=10 OK
ATS5= <n> [&F] [?]</n>	Set the back space character (BS) to delete the last character in the input buffer while AT commands are entered.	Only n=8 (default) can be specified.	ATS5=8 OK
ATS6= <n> [&F] [?]</n>	Set the pause time (in seconds) until dialing. When this command is used, the register is set but does not operate.	n=2 to 10 (Default n=5)	ATS6=5 OK
ATS7= <n> [&F] [?]</n>	Disconnect the line if the connection is unavailable within the set time (in seconds) when dialing.	n=1 to 120 (Default n=60) : Regard the specifications between 121 and 255 as 120.	ATS7=60 OK ATS7? 060 OK
ATS8= <n> [&F] [?]</n>	Set the pause time (in seconds) until comma dialing. When this command is used, the register is set, but the pause time remains 3 seconds.	n=0 : Does not pause n=1 to 255 (Default n=3) : Pause time (in seconds) until the comma is dialed.	ATS8=3 OK
ATS10= <n> [&F] [?]</n>	Set the delay time (1/10 seconds) of auto disconnect. When this command is used, the register is set, but does not operate.	n=1 to 255 (Default n=1)	ATS10=1 OK
ATV <n> [&F]</n>	Set the display method of the result code.	n=0 : Display in numeric characters. n=1 (default) : Display in text.	ATV1 OK

AT Command	Overview	Parameters/Description	Command Examples
ATX <n></n>	Set to detect the busy tone and dial tone, and to display the communication speed.	 n=0: Not to detect busy tones, not to detect dial tones, not to display speed. n=1: Not to detect busy tones, not to detect dial tones, display speed. n=2: Not to detect busy tones, detect dial tones, display speed. n=3: Detect busy tones, not to detect dial tones, display speed. n=4 (default) Detect busy tones, display speed. 	ATX1 OK
ATZ	Reset the FOMA handset AT command set values to factory defaults. If performed during a communication, the line is disconnected.	_	(On-line command mode) ATZ NO CARRIER (Off-line) ATZ OK

Supplementary Explanation of AT Commands

Command name : +CGDCONT

- Overview
 Set APN when sending packet connection.
- Form +CGDCONT=[<cid>[,"<PDP type>"[,"<APN>"]
- Parameter descriptions
 Set APN when sending Packet communication.
 See examples in command operation lists
 <cid>* : 1 to 10
 <PDP type>* : PPP or IP

<APN>* : Optional

- *: <cid> is the number used to control the destination (APN) for the Packet communication to be registered in FOMA handset. 1 to 10 can be registered. The default cid1 is registered "mopera.ne.jp" for APN of "mopera" and cid3 is registered "mopera.net" for APN of "mopera U", when you set cid, 2 or a number between 4 and 10.
 - <PDP type> is a protocol for packet communication.

<APN> is optional connection name that indicates each destination.

• Operation without parameter AT+CGDCONT= :

Delete all cid settings. However, settings for cid1 and cid3 will be reset to their defaults. AT+CGDCONT=? :

Display list of values that can be configured AT+CGDCONT=? :

Display list of values that can be configured

 Command examples Registered APN named abc (When PDP type is "PPP" and cid=3) AT+CGDCONT=3, "PPP", "abc" OK

* Not reset by [&F] and [Z], either.

Command name : +CGEQMIN=[Parameter]

Overview

Save the judgment criteria values whether to allow the QoS (Service Quality) sent by the network when packet communication is established via PPP connection.

- Form
 +CGEQMIN=[<cid>[,,<Maximum bitrate UL>[,
 <Maximum bitrate DL>]]]
- Parameter description
 <cid>* : 1 to 10
 <Maximum bitrate UL>* : None (default) or 64
 <Maximum bitrate DL>* : Non (default) or 384

*: <cid> is the number used to control the destination (APN) for the Packet communication to be registered in FOMA handset. 1 to 10 can be registered. The default cid1 is registered "mopera.ne.jp" for APN of "mopera" and cid3 is registered "mopera.net" for APN of "mopera U", when you set cid, 2 or a number between 4 and 10.

In <Maximum bitrate UL> and <Maximum bit rate DL>, the minimum connection speed [Kbps] is set for both upload and download traffic between FOMA handset download traffic between FOMA handset and the base station. If the parameter is set to None (default), all speeds are permissible. If values are set, any communication at a speed under the set value is not permitted, and the Packet communication will not be connected.

- Operation without parameter AT+CGEQMIN= : Set all <cid> as default value AT+CGEQMIN=<cid> : Set specified <cid> as default value
- · Command examples
 - Command used to permit all speed both upload and download both upload and download (when<cid>=2) AT+CGEQMIN=2 OK
 - (2) Command used to permit only 64Kbps upload and 384Kbps download (when<cid>=2) AT+CGEQMIN=2,,64,384 OK
 - (3) Command used to permit 64Kbps upload and all speed download (when<cid>=3) AT+CGEQMIN=3,,64 OK
 - (4) Command used to permit all speed upload and only 384Kbps download (when<cid>=3)
 AT+CGEQMIN=3,,,384
 OK
- * Not reset by [&F] and [Z], either.

Command name : +CGEQREQ=[Parameter]

- Overview Set the QoS (Service Quality) requested to the network when packet communication via PPP connection is dialed.
- Form
 +CGEQREQ=[<cid>[,<traffic class>,
 </damna logo class>,
 </damn
- Parameter Description
 <cid>* : 1 to 10 <traffic class> : 2
 <Maximum bitrate UL>* : 64
 <Maximum bitrate DL>* : 384
 - *: <cid> is the number used to control the destination (APN) for the Packet communication to be registered in FOMA handset.
 1 to 10 can be registered to FOMA handset. The

default cid1 is registered "mopera.ne.jp" for APN of "mopera" and cid3 is registered "mopera.net" for APN of "mopera U", when you set cid, 2 or a number between 4 and 10.

In <Maximum bitrate UL> and <Maximum bitrate DL>, the minimum connection speed [in Kbps] is set for both upload and download traffic between FOMA handset and the base station. If the parameter is set to None (default), all speeds are permissible. If values are set, any connection at a speed over the set value is not permitted, and the Packet communication will not be connected.

- Operation without parameter AT+CGEQREQ=<cid> : Set all <cid> as default.
 AT+CGEQREQ=<cid> : Set specified <cid> as default.
- Command examples Command used to require 64Kbps upload and 384Kbps download (when<cid>=3) AT+CGEQREQ=3,2,64,384 OK
- * Not reset by [&F] and [Z], either.

List of Reasons of Disconnection

Packet communication

Value	Reason
27	APN does not exist, or is not valid.
30	Disconnected by the network.
33	No subscription for packet communication.
36	Disconnected properly.

64K data communication

Value	Reason
1	Specified number does not exist.
16	Disconnected properly.
17	Cannot communicate as the other party is busy.
18	Although sent, there was no response within the specified time.
19	Cannot communicate as the other party is being called.
21	The other party rejected the communication.
63	The network service and the option are not valid.
65	Unsupported processing speed was specified.
88	Called to or received a call from a terminal with different terminal attributes.

Result Codes

List of Result Codes

Numeric display	Text display	Description
0	ОК	Operation performed properly.
1	CONNECT	Connected to the other party.
2	RING	Incoming call.
3	NO CARRIER	Line disconnected.
4	ERROR	Unable to accept command.
6	NO DIAL TONE	Unable to detect dial tone.
7	BUSY	Detect busy tone. (Applied only when dialing by 64K data communication.)
8	NO ANSWER	Completed connection timeout.
101	DELAYED	Within restricted redialing time.

Extended Result Codes

When &E0

Show the connection speed between the FOMA terminal and the base.

Numeric display	Text display	Connection speed
122	CONNECT 64000	64000bps
125	CONNECT 384000	384000bps

When &E1

Numeric display	Text display	Connection speed
5	CONNECT 1200	1200bps
10	CONNECT 2400	2400bps
11	CONNECT 4800	4800bps
13	CONNECT 7200	7200bps
12	CONNECT 9600	9600bps
15	CONNECT 14400	14400bps
16	CONNECT 19200	19200bps
17	CONNECT 38400	38400bps
18	CONNECT 57600	57600bps
19	CONNECT 115200	115200bps
20	CONNECT 230400	230400bps
21	CONNECT 460800	460800bps

Communication Protocol Result Codes

Numeric display	Text display	Connection speed
1	PPPoverUD	Connection with 64K data communication
3	AV64K	Connection with video call (64K) communication
5	PACKET	Connection with packet communication

Examples of Displayed Result Codes

When ATX0 is set Regardless of the $AT \neq V$ command (P27) settings, only CONNECT is displayed after connection is established. Example of text display : ATD * 99 * * * 1# CONNECT Example of numeric display : ATD * 99 * * * 1# When ATX1 is set When ATX1, AT ¥V0 is set (default) Display in the form of CONNECT <Speed between FOMA and PC> after the connection is established. Example of text display : ATD * 99 * * * 1# **CONNECT 460800** Example of numeric display : ATD * 99 * * * 1# 121 When ATX1. AT ¥V1 is set Display in the following form after the connection is established. CONNECT <Speed between FOMA and PC> PACKET < Destination APN>/< Maximum uplink speed (between FOMA terminal→Base)> / <Maximum downlink speed (between FOMA handset←Base)> Example of text display : ATD * 99 * * * 1# CONNECT 46080 PACKET mopera.ne.jp/64/384 (Which means connect to "mopera.ne.jp" by 64Kbps uplink speed and 384Kbps downlink speed at the maximum.) Example of numeric display

: ATD * 99 * * * 1# 1215

 If ATX1 and AT¥V1 are set concurrently, a dial-up connection may not be executed properly. It is recommended to use only AT¥V0.