




**B2B Connector to Keypad**

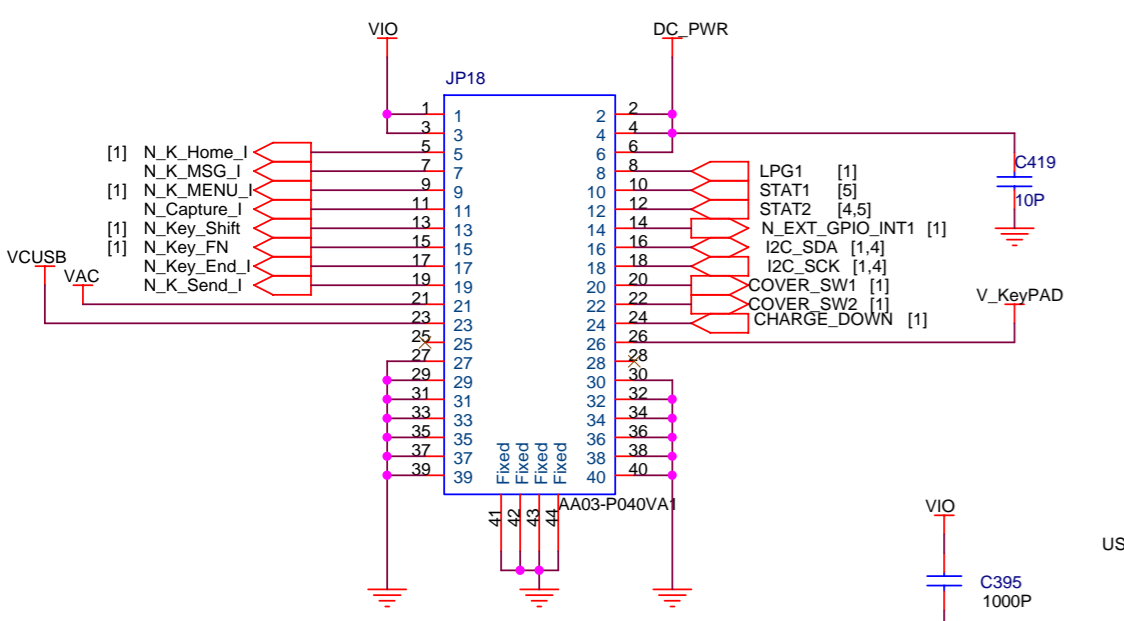


**Debug Connector**

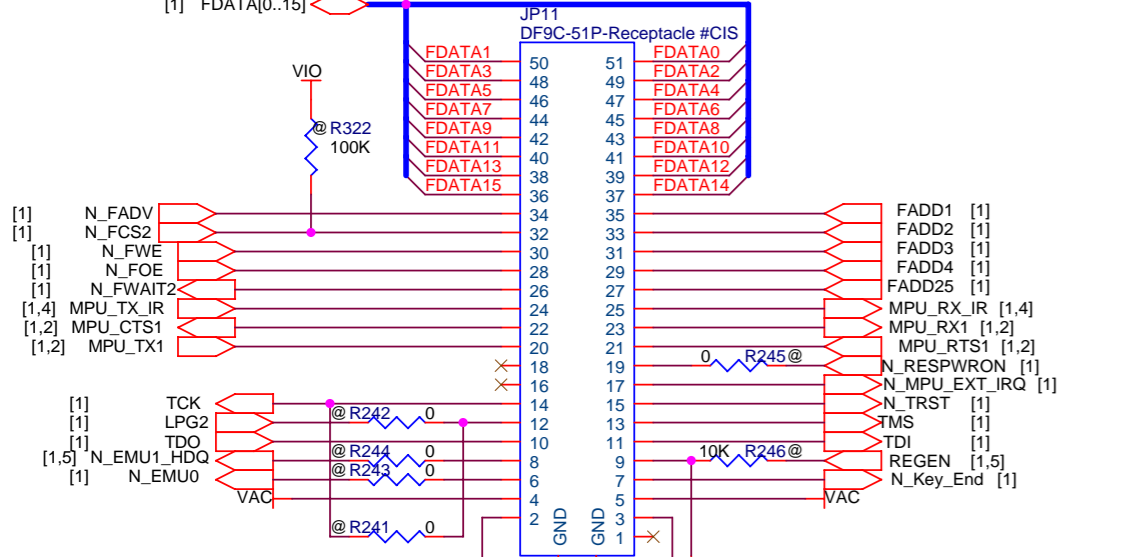


**SD slot**

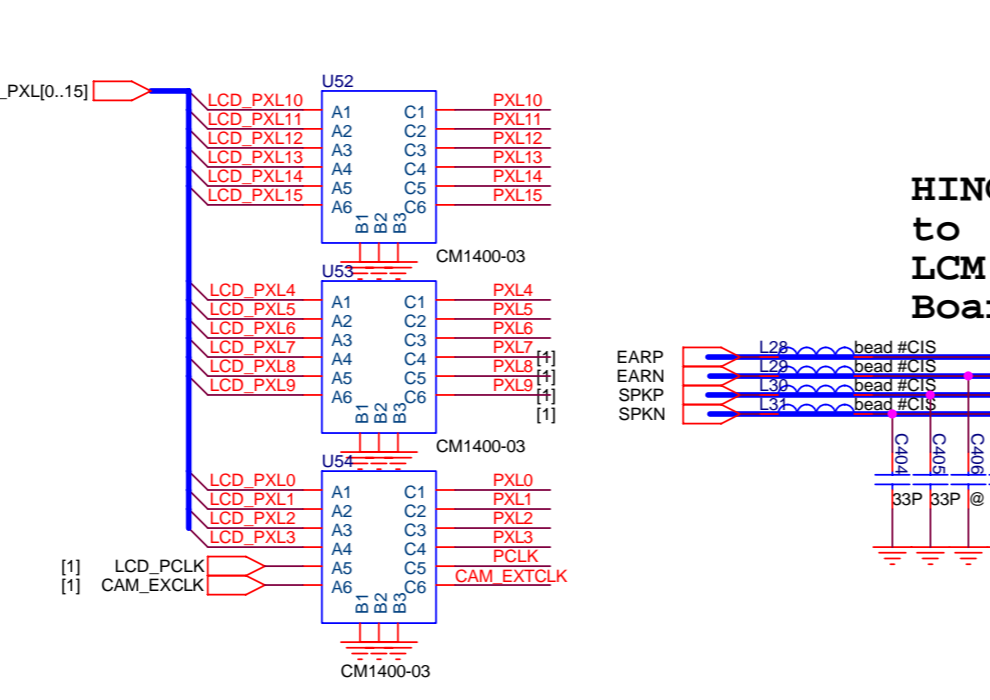


**HINGE to LCM Board**

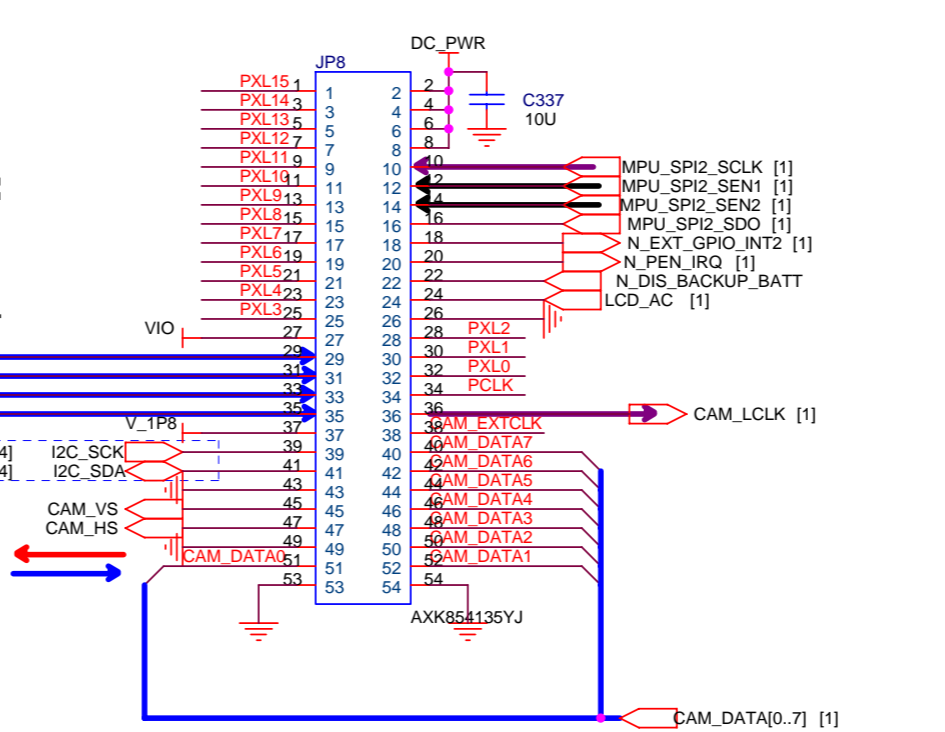


**CAM Board**

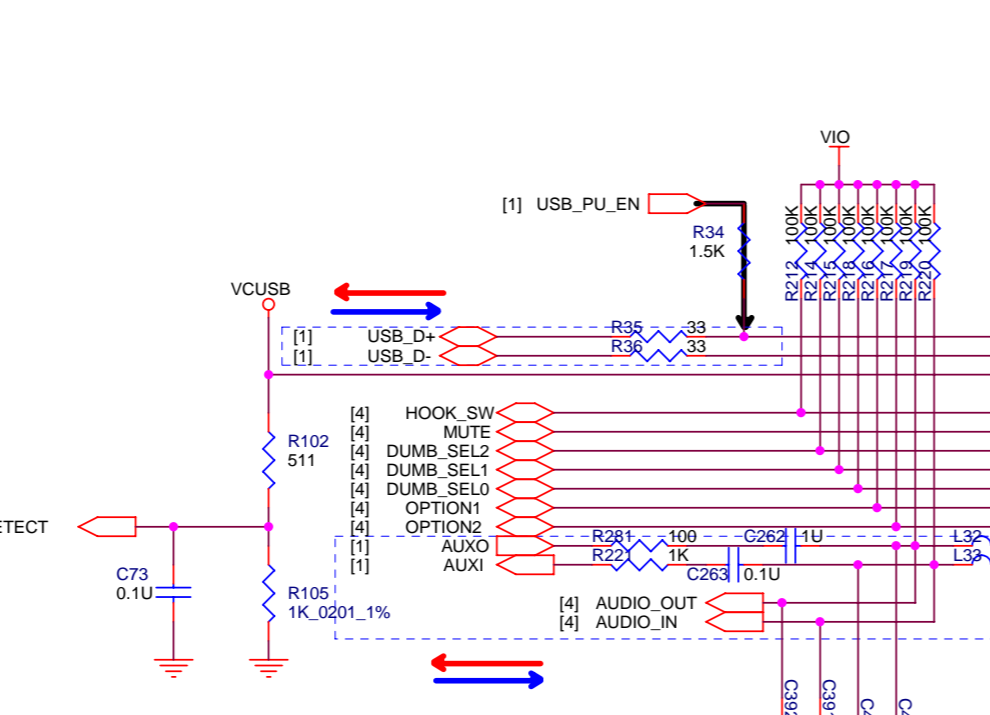



**USB and Audio Connections**

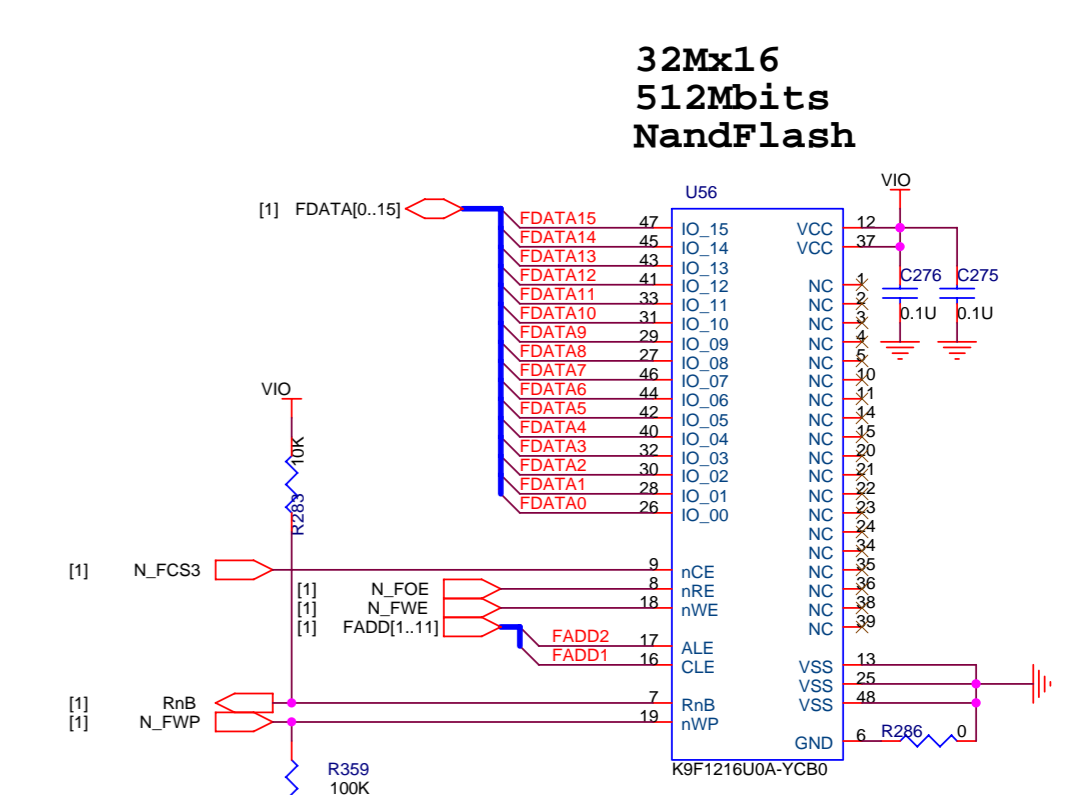



**32Mx16 512Mbits NandFlash**

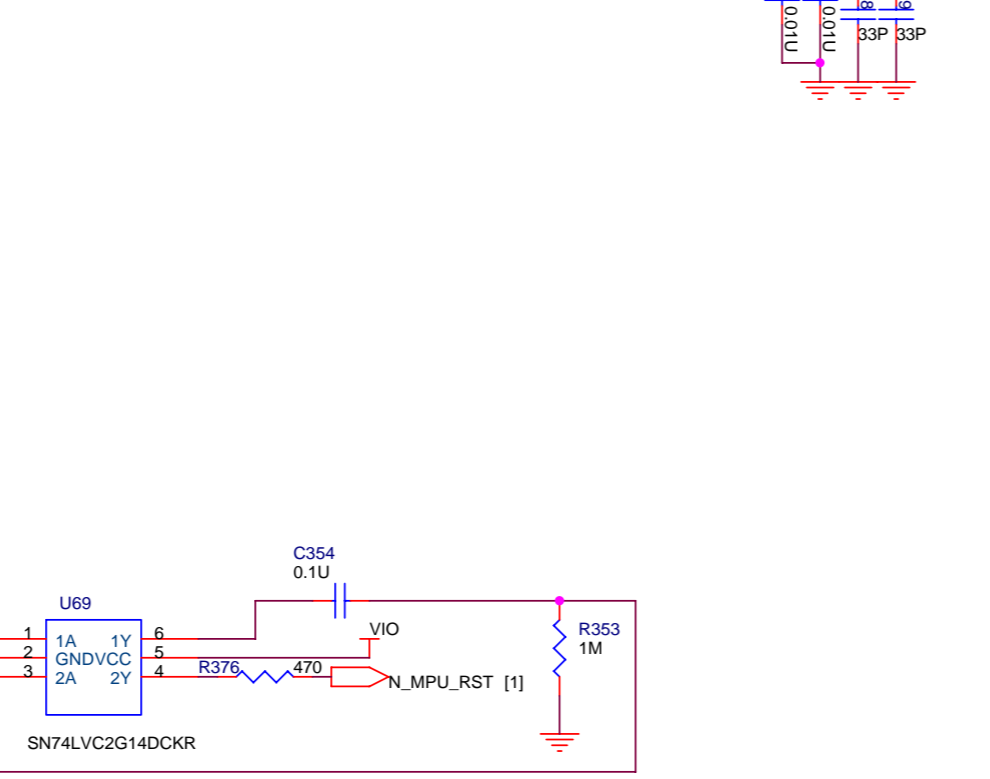


**WLAN Module**

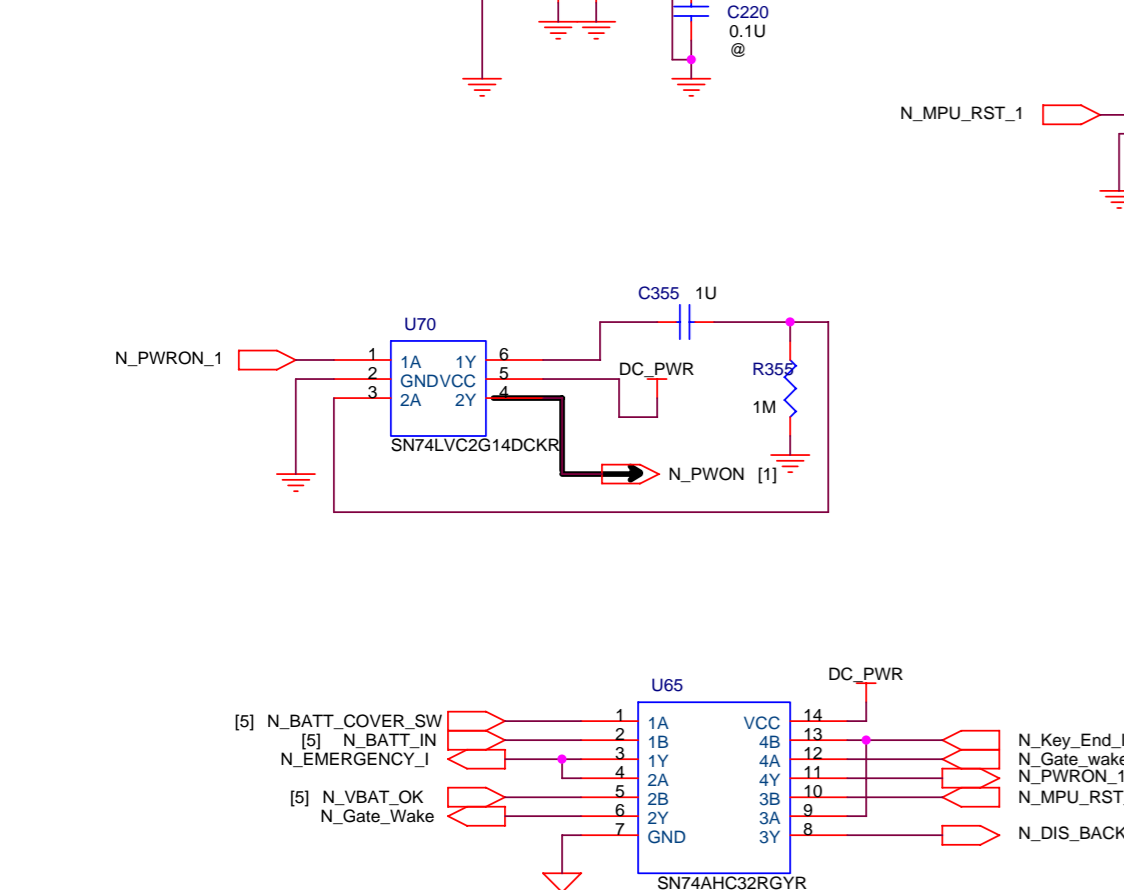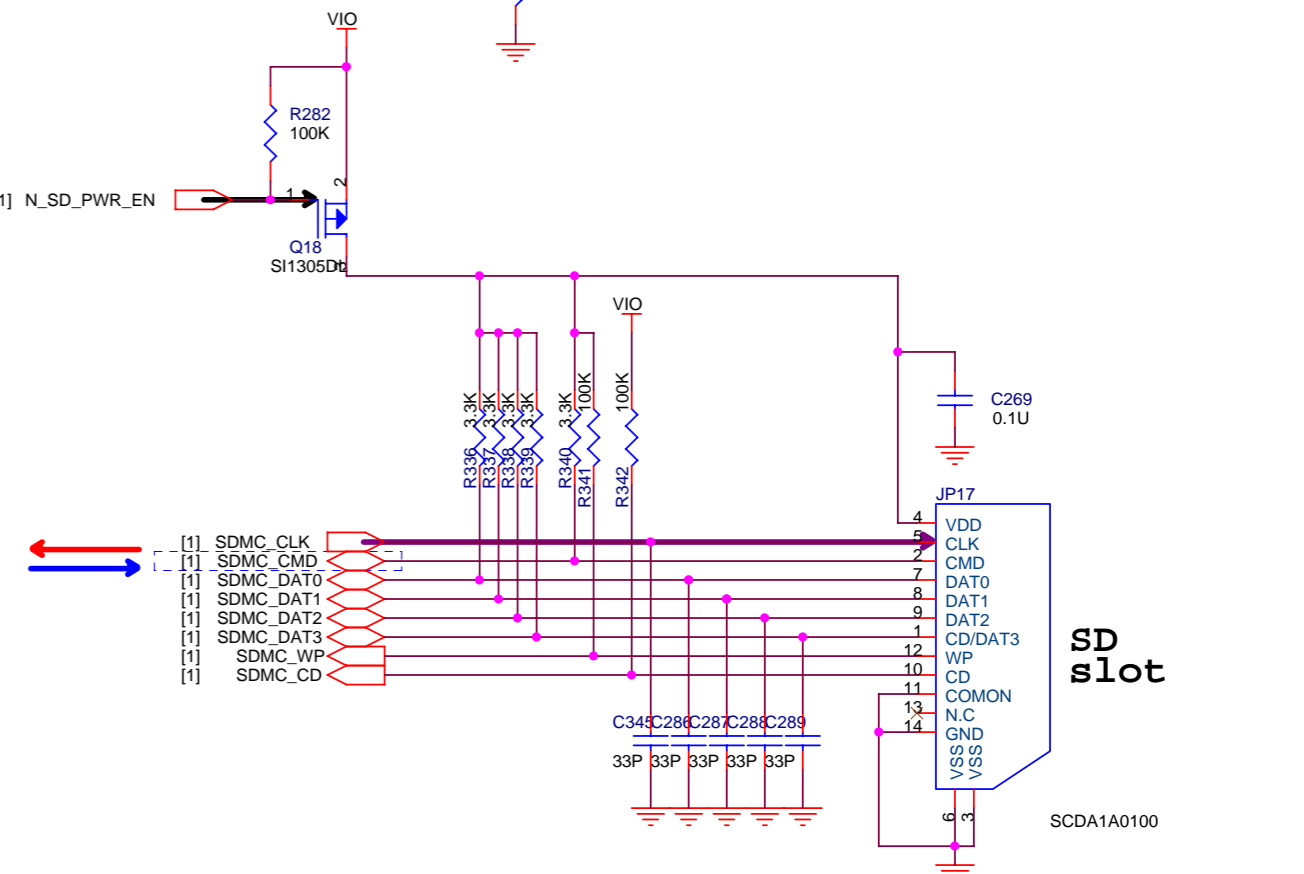





### Internal MIC

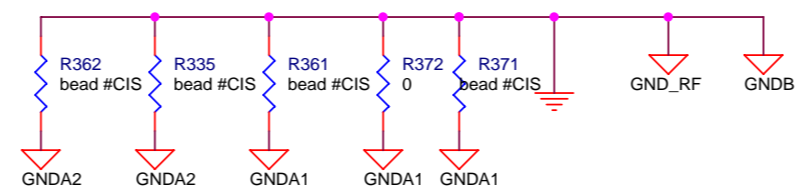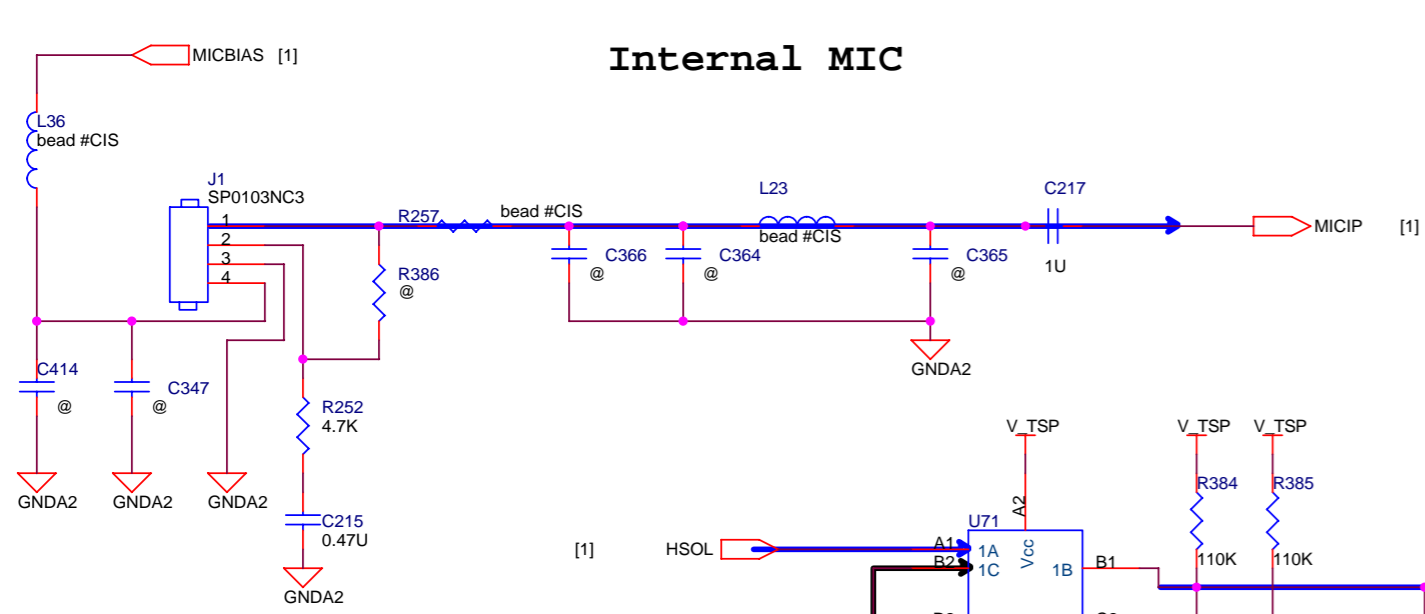


### 4 Rings PhoneJack

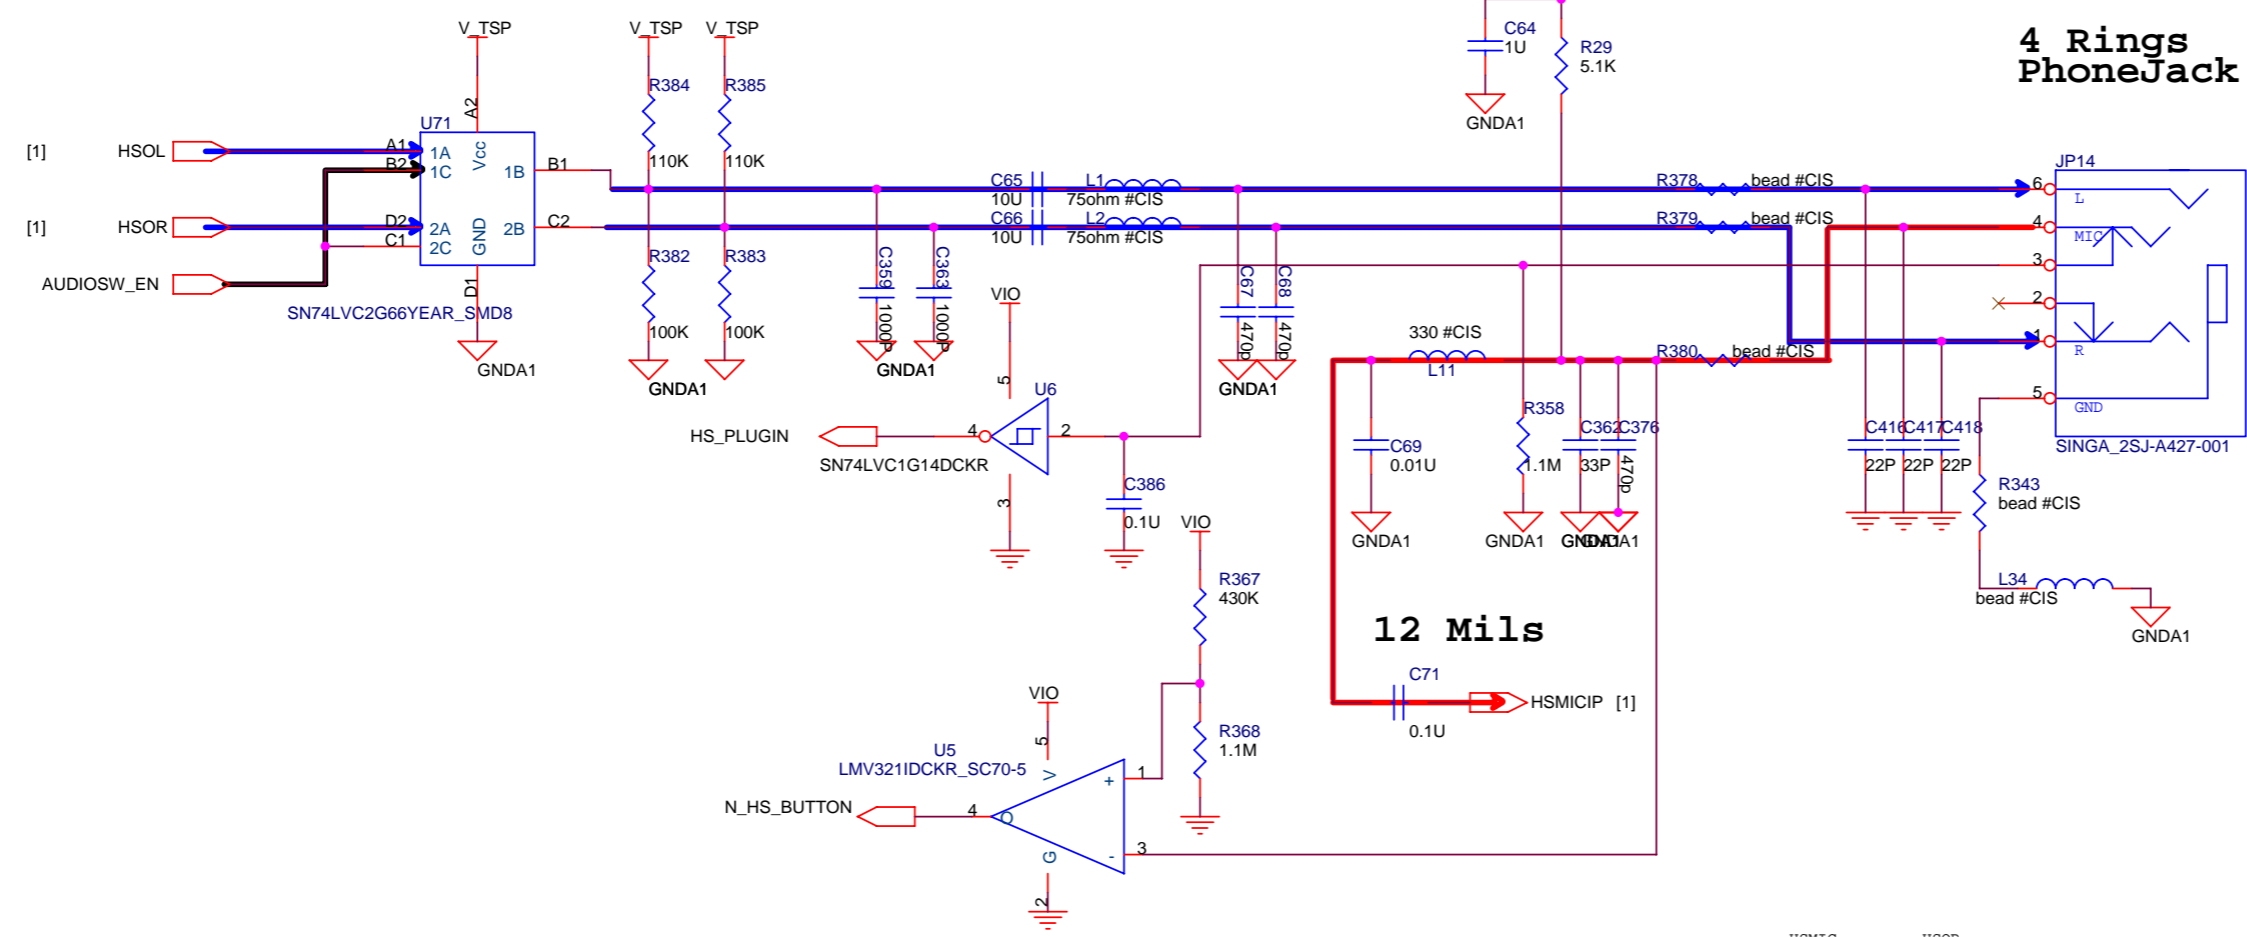

### 12 Mils

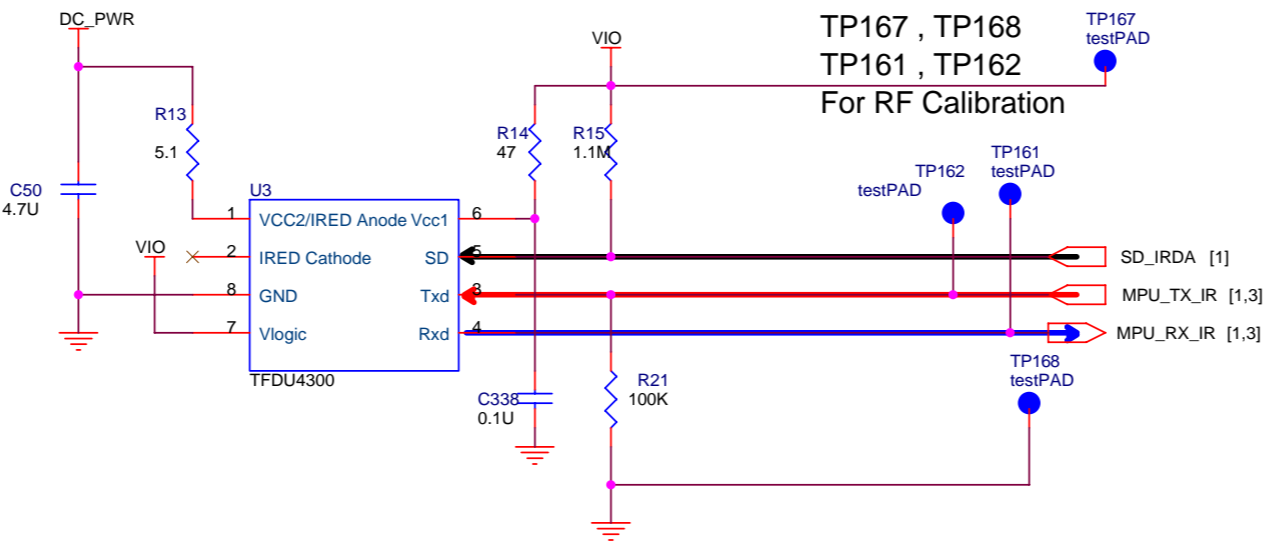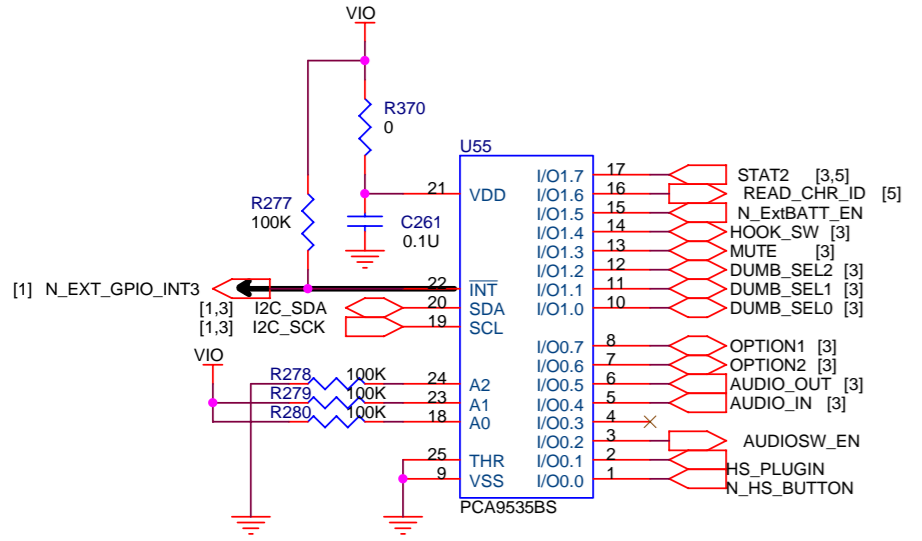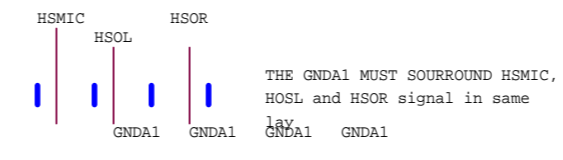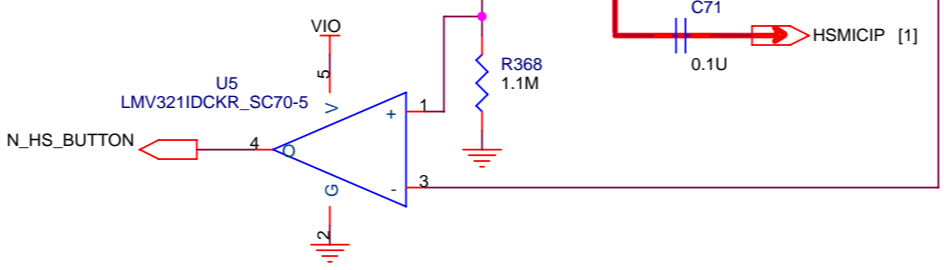

# Charger Circuit

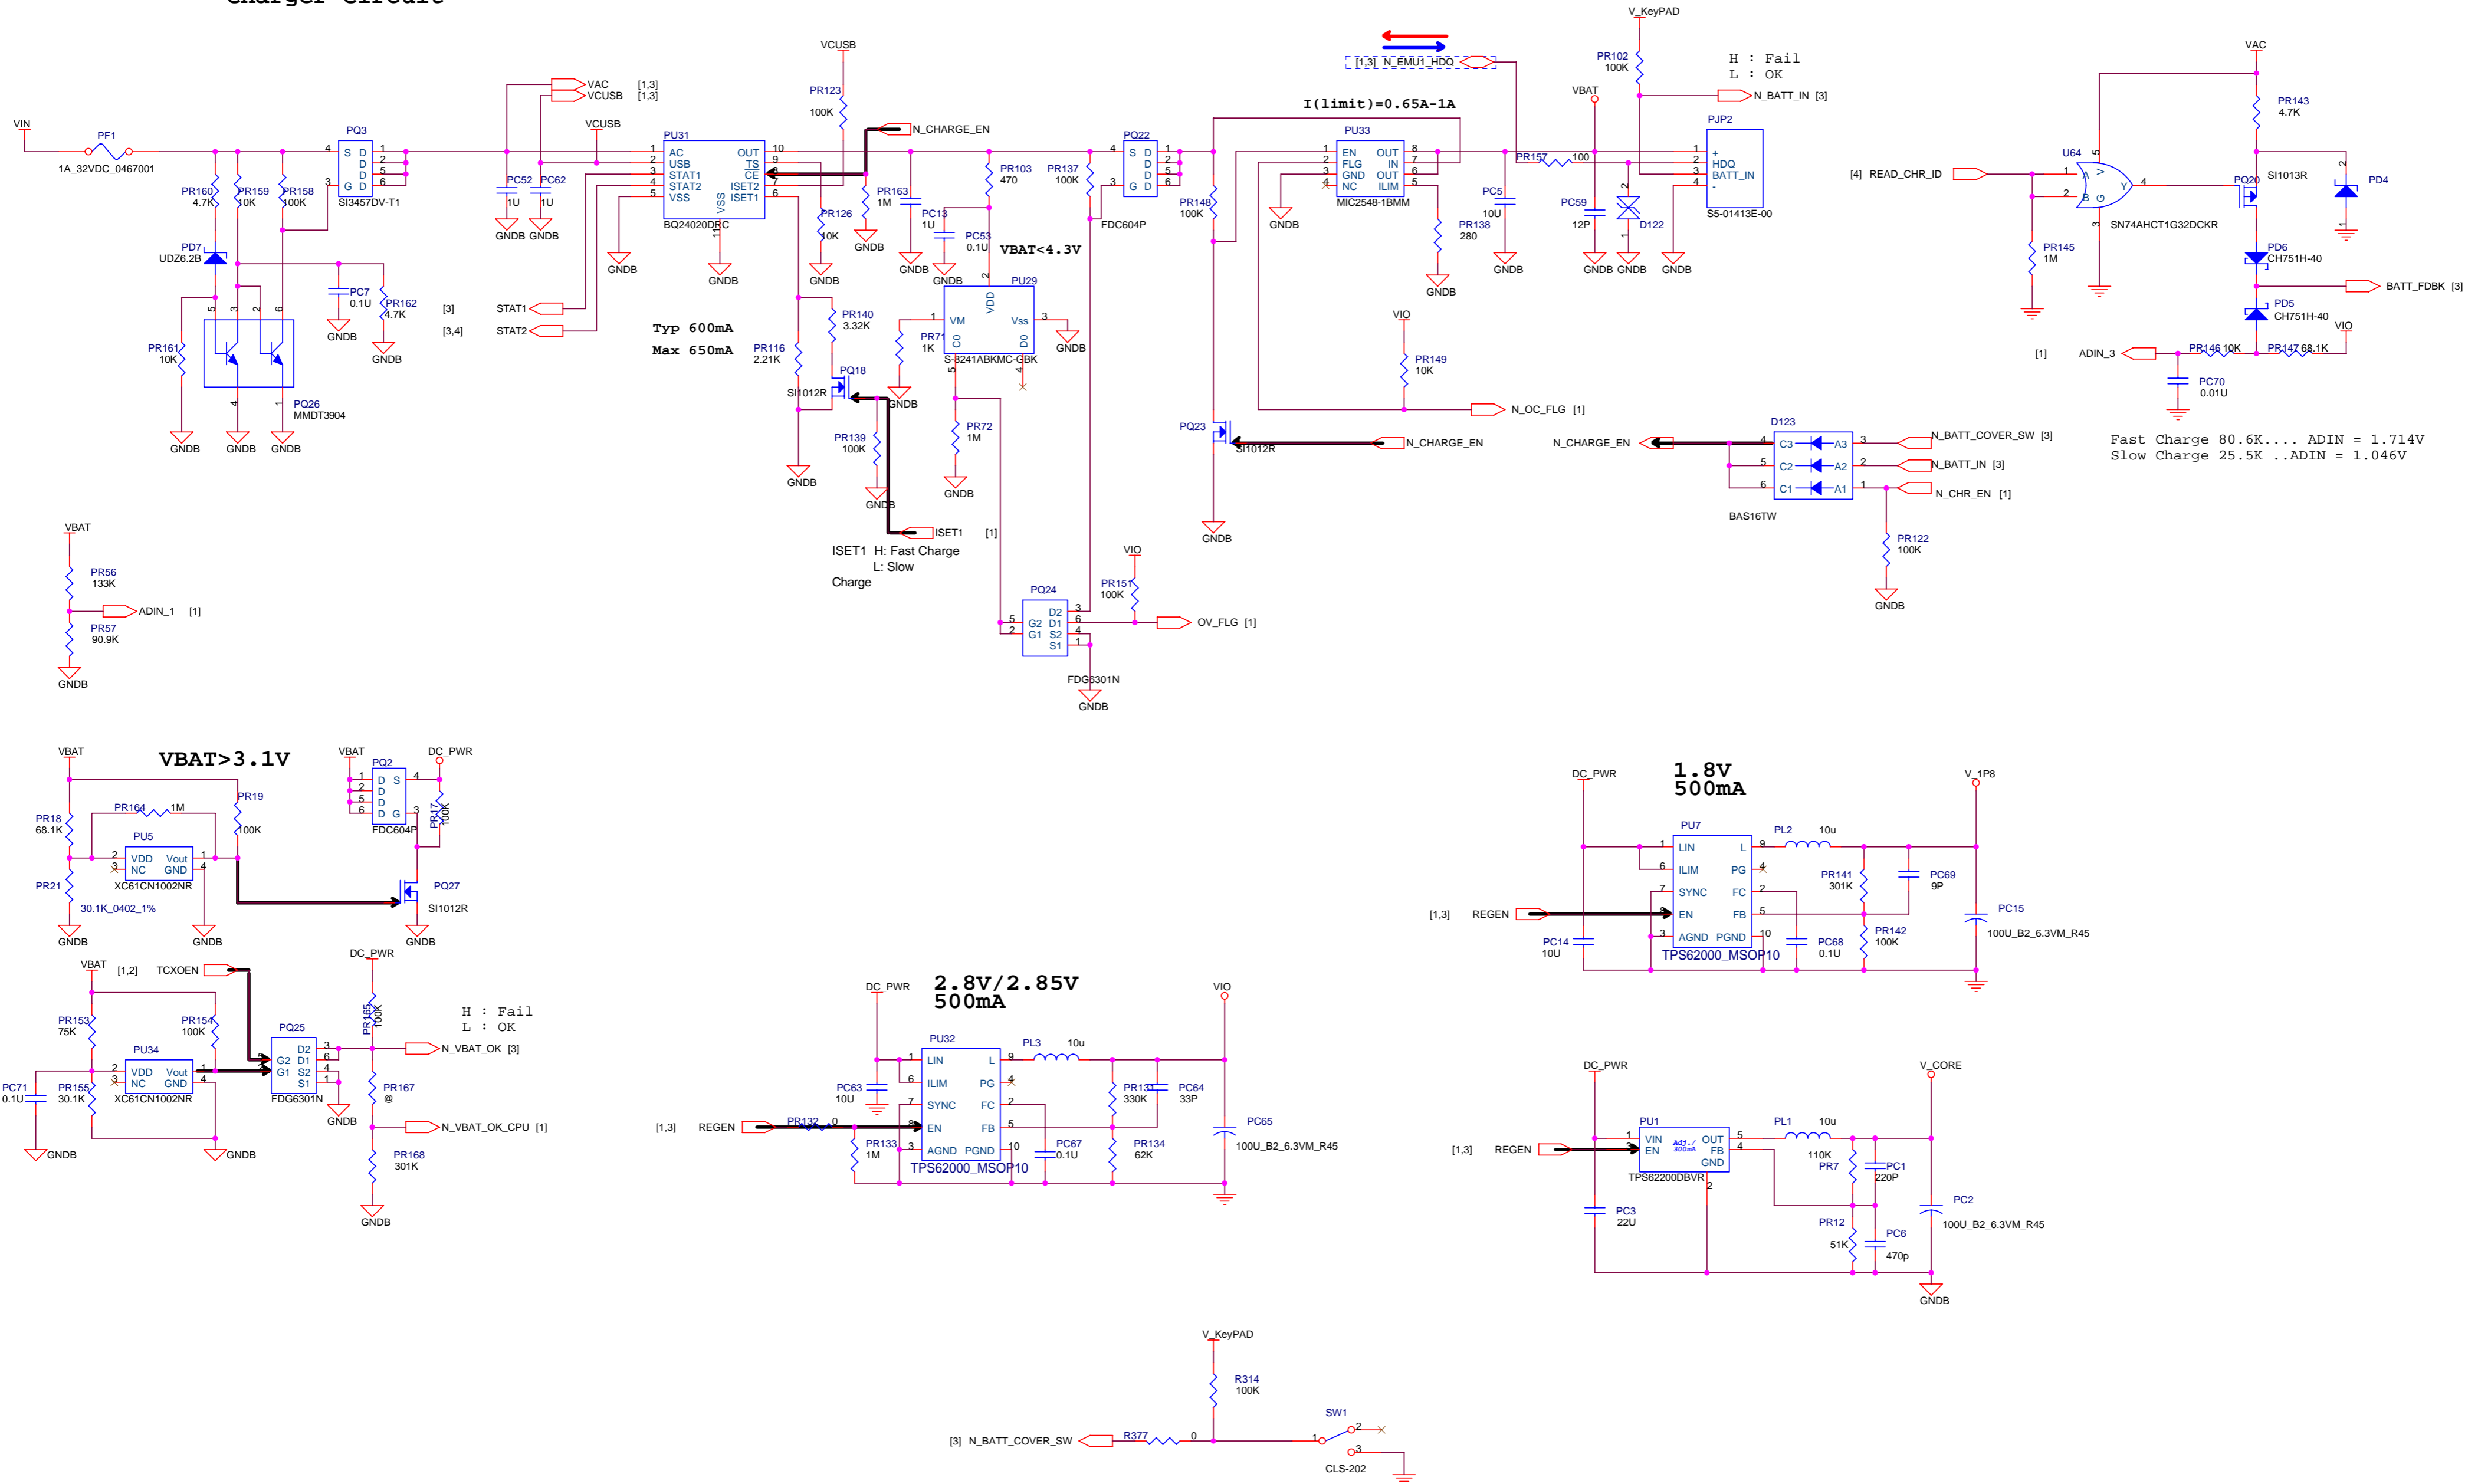

When DC\_PWR = 4.2V ---- 2.887  
When DC\_PWR = 3.1V ---- 2.13V